

LWF

LAKE
WINNIPEG
FOUNDATION



Truro Creek Photo: Paul Mutch

PEMBINA VALLEY
WATERSHED DISTRICT

2023 regional report



Lake Winnipeg Community-Based Monitoring Network: Overview	2
Sample Collection & Site Map.....	3
Laboratory & Data Analysis.....	4
Analytical methods.....	4
Laboratory partnership & proficiency testing	4
Limit of detection.....	4
Load and export calculation methods	5
LWCBMN By the Numbers - 2023.....	7
Pembina Valley Watershed District.....	8
Characteristics of the 2023 Field Season.....	8
Manitoba Watershed District Map.....	9
2023 Results – PVWD Summary.....	10
2023 Results – Hotspot Map.....	11
2023 Results – Individual Sites	12
Badger Creek near Cartwright	12
Buffalo Creek near Rosenfeld	14
Cypress Creek near Clearwater.....	16
Deadhorse Creek near Rosenfeld	18
Kronsgart Drain near Sewell	20
Mowbray Creek near Mowbray	22
Pembina River above Lorne Lake	24
Pembina River below Crystal Creek.....	26
Pembina River downstream of Swan Lake Outlet.....	28
Pembina River near La Rivière.....	30
Pembina River near Windygates.....	32
Pembina River north of Killarney	34
Rivière aux Marais near Christie	36
Snowflake Creek near Snowflake	38
Sites without monitored discharge	40
Bone Lake Outlet.....	40

Downstream Deadhorse Creek..... 40

Downstream Plum Drain 41

Upstream Swan Lake..... 41

Incremental Calculations..... 42

 Pembina River above Lorne Lake 42

 Pembina River below Crystal Creek..... 43

 Pembina River downstream of Swan Lake Outlet..... 44

 Pembina River near La Rivière..... 45

 Pembina River near Windygates..... 46

Map Sources..... 47

 Drainage area polygons 47

 Map layers..... 47

Lake Winnipeg Community-Based Monitoring Network: Overview

The Lake Winnipeg Community-Based Monitoring Network (LWCBMN), coordinated by the Lake Winnipeg Foundation (LWF), mobilizes volunteers and watershed partners to collect water samples across Manitoba to measure phosphorus concentration. Phosphorus is the nutrient responsible for blue-green algae blooms on Lake Winnipeg. Phosphorus comes from diverse sources across the watershed, including municipal wastewater and agricultural runoff.

Different sub-watersheds contribute different proportions of Lake Winnipeg’s total phosphorus load. With the help of a strong network of watershed partners and volunteers, this long-term monitoring program is identifying phosphorus hotspots – localized areas that contribute higher amounts of phosphorus to waterways than other areas. Targeting actions to reduce phosphorus loading in hotspots will reduce the amount of phosphorus entering Manitoba’s lakes and rivers and improve the health of Lake Winnipeg.

Snow melts, floods and heavy rainfall events are responsible for most of the phosphorus that is flushed from the land and carried into our waterways. LWCBMN samples frequently throughout the season, and particularly during the spring melt, to ensure we capture phosphorus runoff during these high-water events.

Most LWCBMN sampling is conducted at stations where water flow is continuously monitored by the Water Survey of Canada (WSC). By tracking flow online using the WSC’s provisional real-time data, the network can notify partners volunteers and across the watershed to ensure frequent sampling during peak flows.

Sites with flow data can be coupled with LWCBMN data to calculate **phosphorus loads**. We need several samples throughout the season, corresponding to changes in flow, to accurately calculate these loads. Phosphorus loads can subsequently be used to calculate **phosphorus export**, based on the area of the watershed.

Phosphorus load is the total amount of phosphorus flowing past a sample site over a given period, expressed as tonnes per year.

Phosphorus export is the amount of phosphorus exported by each hectare of land in a year, expressed as kg/ha/y.

Sample Collection & Site Map

Water samples are collected using a weighted sampling device that collects source water directly into a 500 mL Nalgene polyethylene bottle. The sampling device is lowered into the water just before it hits the bottom, the bottle is filled, then brought back to the surface. It is rinsed three times prior to sample collection. From the collection bottle, a 60 mL Nalgene polyethylene bottle containing 1 mL 4N H₂SO₄ is filled with unfiltered water. Next, 20 mL is drawn into a syringe, and filtered through a 45 µm filter into a 25 mL scintillation vial containing 0.1 mL of 4N H₂SO₄.

In 2023, 1563 unfiltered water samples and 1516 filtered water samples were collected and analyzed from 107 sites. Of these 107 sites, 88 are located near flow-metered WSC stations, 3 are located near non-flow-metered WSC stations, and 16 are not located near any stations.

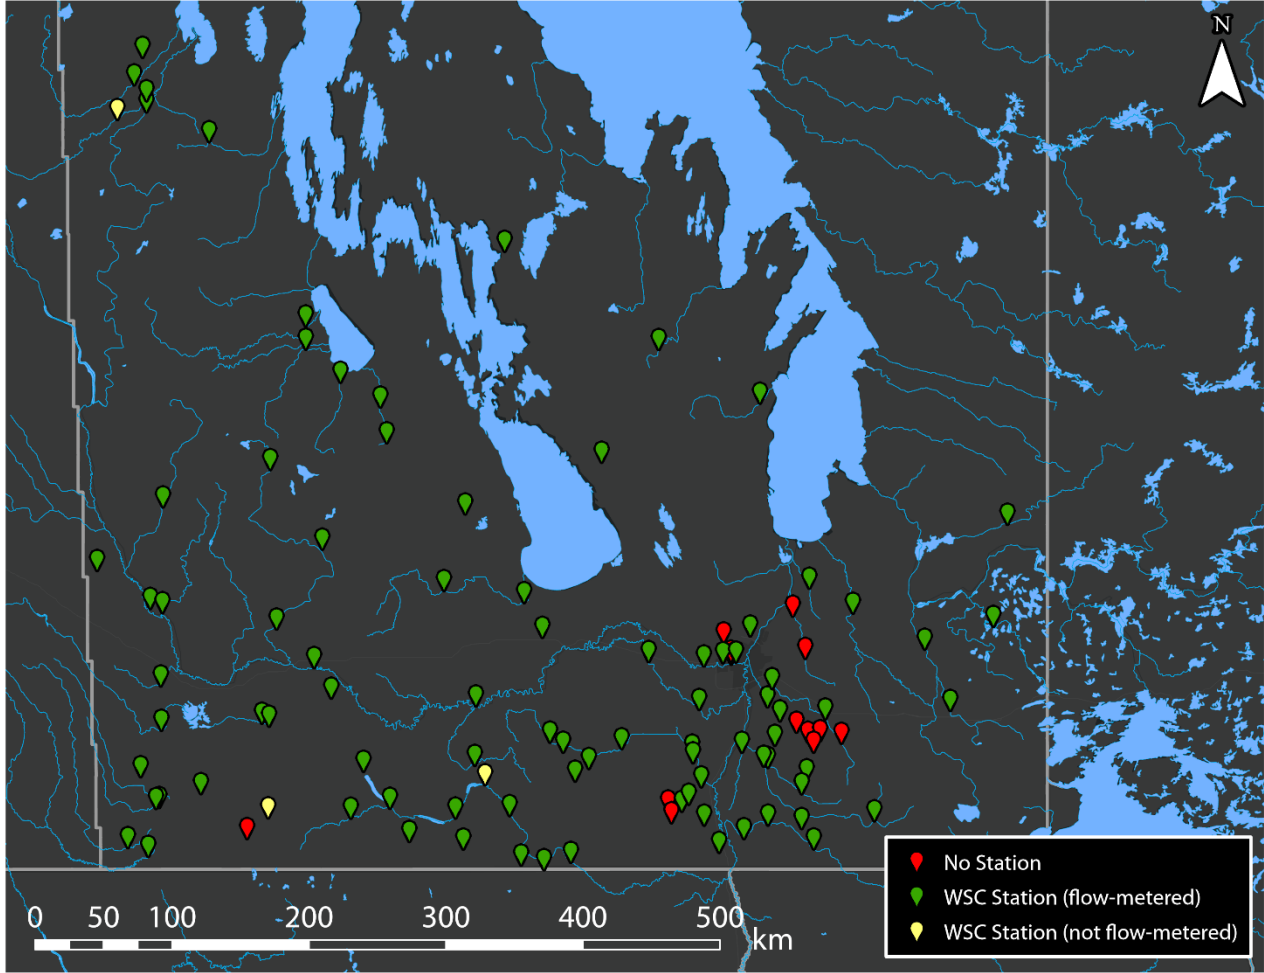


Figure 1: Map of LWCBMN sampling sites in 2023. Locations shown provided at least one sample. Colours indicate nearby station type.

Laboratory & Data Analysis

Analytical methods

LWCBMN water samples are analysed for both total and dissolved phosphorus concentration, a two-step procedure involving first the chemical digestion/conversion of all phosphorus forms to orthophosphate (PO_4^{3-}) followed by the analysis of the concentration of PO_4^{3-} . The digestion procedure is patterned after USGS [Water-Resources Investigations Report 03-4174](#). The concentration of PO_4^{3-} in the sample was determined following [Murphy & Riley \(1962\)](#). The result of this method is determination of the concentration of total phosphorus (TP) (for whole water samples) and total dissolved phosphorus (TDP) (for case of syringe filtered water samples) both reported in mg/L. There are occasionally instances where the reported TDP concentration is slightly higher than the reported TP concentration. While this is not physically possible, these discrepancies are common in environmental datasets largely due to analytical variability, sample processing variability, and detection limits. These discrepancies are generally negligible and should not be impacting the reliability of annual load/export calculations.¹

We do not directly measure particulate phosphorus, but it can be inferred by the difference between total and dissolved phosphorus concentration. In the data tables we show both total and dissolved phosphorus loads/exports, as well as the TDP/TP ratio, which indicates the proportion of annual total phosphorus load/exports which are in dissolved form. Higher percentages indicate that dissolved phosphorus composes a larger fraction of the total phosphorus load/export.

Laboratory partnership & proficiency testing

Laboratory analysis on LWCBMN water samples was conducted in partnership with Dr. Nora Casson at her laboratory at the University of Winnipeg. Quality assurance of laboratory methods for the determination of total phosphorus was completed on samples sent from [Proficiency Testing Canada](#). Proficiency testing, conducted every 6 months, allows us to assess the quality of our results as compared to the results of other laboratories across the country. Since November 2023, we have received excellent passing grades on these tests, highlighting the consistency and accuracy of our laboratory methods.

Limit of detection

With 2023 data we began determining the limit of detection (LOD) for our laboratory methods. The LOD is “the lowest concentration level that can be determined to be statistically

¹ (U.S. Environmental Protection Agency (EPA) (1993). *Methods for the Determination of Inorganic Substances in Environmental Samples.*)

different from an analytical blank”¹. A commonly used method for estimating the LOD is by assessing the standard deviation of blanks². In our analytical process, we prepare blanks using deionized water and analyze them identically to our samples. Then, we calculate the standard deviation of the blanks and multiply this by three². The LOD tells us that any result higher than the LOD has a 99.7% probability of being clearly distinguishable from random noise in the analysis.

The LOD for 2023 data is 0.0395 mg/L. We have decided to use a common method for treating values lower than the LOD for the load/export calculations and hotspot maps, which is to convert these values to half of the LOD. However, on the graphs and in the DataStream dataset, we have retained all the original values for full transparency (while showing a line on the graphs to indicate the LOD and describing the LOD in the DataStream dataset).

Load and export calculation methods

Our laboratory results provide a record of the phosphorus concentrations for every day that water samples were collected, but we are equally interested in reporting the load of phosphorus each year in each watershed that we sample. To create this record, we multiply concentrations by the volume of water that flowed past the station every day, using flow data from Water Survey of Canada (WSC) stations.

WSC’s provisional real-time flow data undergoes additional quality assurance and quality control processes and is later published as historical data. Historical data is released by WSC as the approved version of the data, with notes about site characteristics or considerations affecting data quality. Our 2023 data analysis used approved historical flow data.

For each station, gaps between concentration observations are filled by linear interpolation to create a continuous daily record. For the WSC flow record before or after the first or last water sample collected, we estimate the missing daily mean concentrations to be equal to the first or last measured concentration, respectively. These measured and estimated daily concentrations are then multiplied by daily flow to calculate daily phosphorus loads. Daily phosphorus loads are summed together to calculate seasonal and annual phosphorus loads

Larger watersheds generate greater river flow and typically larger phosphorus loads. Comparing the intensity of phosphorus sources, especially among watersheds of varying sizes, is possible through the calculation of average load exported from each unit area of the watershed. Hence, we also report phosphorus export, which is simply the annual load divided by the watershed area that contributed to this load.

The export per unit area is indicative of the relative intensity of the sources generating phosphorus export, even among watersheds of different sizes. This is why we display maps of phosphorus export (and not load) in this report. Hotspots identified in these reports export

¹ Long, G. L., & Winefordner, J. D. (1983). Limit of Detection: A Closer Look at the IUPAC Definition. *Analytical Chemistry*, 55(7), 712A–724A.

² U.S. EPA (2009). Definition and Procedure for the Determination of the Method Detection Limit (MDL). 40 CFR Part 136, Appendix B.

several times more phosphorus per hectare than non-hotspot watersheds. Identifying hotspots can help focus phosphorus reduction programs to where they will have the greatest impact.

LWCBMN By the Numbers - 2023

Table 1: Summary of 2023 LWCBMN sampling activity by region.

Region	Number of sites	Number of samples	Site with highest regional total phosphorus (TP) export (kg/ha/y)	Mean % of spring* water load	Mean % of spring* TP load
Assiniboine West	9	134	Assiniboine River Near Brandon - 0.50	76.80	83.32
Central Assiniboine	2	45	Cypress River Near Bruxelles - 0.64	98.71	99.59
City of Winnipeg	5	122	Sturgeon Creek At St. James Bridge - 0.29	87.54	93.33
East Interlake	3	15	Grassmere Creek Drain Near Middlechurch - 0.12	83.19	96.03
Inter-Mountain	5	105	Ochre River Near Ochre River - 0.10	72.98	87.05
Northeast Red	5	58	Devils Creek Near Libau - 0.19	88.00	93.78
Pembina Valley	18	312	Riviere Aux Marais Near Christie - 1.08	93.03	93.83
Redboine	12	188	Roseisle Creek Near Roseisle - 1.09	87.72	88.52
Souris River	12	66	NA ¹	86.91	NA ¹
Seine Rat Roseau	20	253	Joubert Creek Near Pansy - 0.62	89.48	92.85
Swan Lake	6	130	North Duck River At Cowan - 0.097	61.31	73.36
West Interlake	2	15	Burnt Lake Drain Northwest Of Lundar - 0.022	46.68	60.03
Whitemud	4	59	Whitemud River Near Westbourne - 0.10	85.03	87.71
Winnipeg River	4	61	Bird River Outlet of Bird Lake - 0.028	62.09	52.00

*LWCBMN defines "Spring" as March 1 to May 31, inclusive.

Raw data (phosphorus concentration and water flow) is available online at LakeWinnipegDataStream.ca, an open access hub for sharing water data.

¹ In 2023, no sites in the Souris River region had sufficient data to calculate loads/exports.

Pembina Valley Watershed District

The Pembina Valley Watershed District (PVWD) is located in southwestern Manitoba along the Canada-United States border. Approximately half of the Pembina River basin is located in the United States. The Pembina River is the main waterway in this region, with many tributaries and lakes flowing into it. The primary land use and economy in PVWD is agriculture, specifically cereal, oilseed and forage crops (2006 census). Other potential phosphorus contributors include the approximately 780 livestock farms in the watershed (2006 census). In addition to agricultural activities, wastewater treatment plants and lagoons in municipalities throughout PVWD contribute phosphorus to local waterways. Major municipalities include Winkler, Morden and Manitou. In 2020, PVWD boundaries expanded to include the western tributaries of the Red River.

[PVWD Website \(pvwd.ca\)](https://www.pvwd.ca)

[PVWD Watershed Plans \(pvwd.ca/watershed-planning\)](https://www.pvwd.ca/watershed-planning)

Characteristics of the 2023 Field Season

2023 was a very dry year in southern Manitoba. In the past 12 months prior to October 2023, most of southern Manitoba experienced moderately to severely dry conditions¹. As well, from March to May 2023, a historically important period for phosphorus export, most of southern Manitoba experienced moderately to extremely dry conditions².

The mean peak discharge date across all LWCBMN sites with analyzed water samples was April 19, 2023 (with a standard deviation of 24.26 days). In 2023, an average of 83.48% of stream discharge occurred in the spring (March 1 – May 31) across LWCBMN sites (with a standard deviation of 16.74%). During snowmelt, safety concerns may prevent or hinder sampling from occurring at some sites. As a result, some load/export calculations may be less accurate than they would be had sampling remaining frequent during these times.

¹ https://www.gov.mb.ca/sd/pubs/water/drought/2023/drought_conditions_report_oct.pdf

² https://www.gov.mb.ca/sd/pubs/water/drought/2023/drought_conditions_report_may.pdf

Manitoba Watershed District Map

Manitoba’s watershed districts are crucial partners contributing to the success of LWCBMN. In addition to assisting with sample collection, each district brings valuable community connections and a wealth of regional expertise to the network, helping us contextualize and better understand the data.

In 2023, 12 watershed districts participated in LWCBMN activities: Assiniboine West, Central Assiniboine, East Interlake; Inter-Mountain; Northeast Red, Pembina Valley, Redboine, Souris River, Seine Rat Roseau, Swan Lake, West Interlake, and Whitemud.

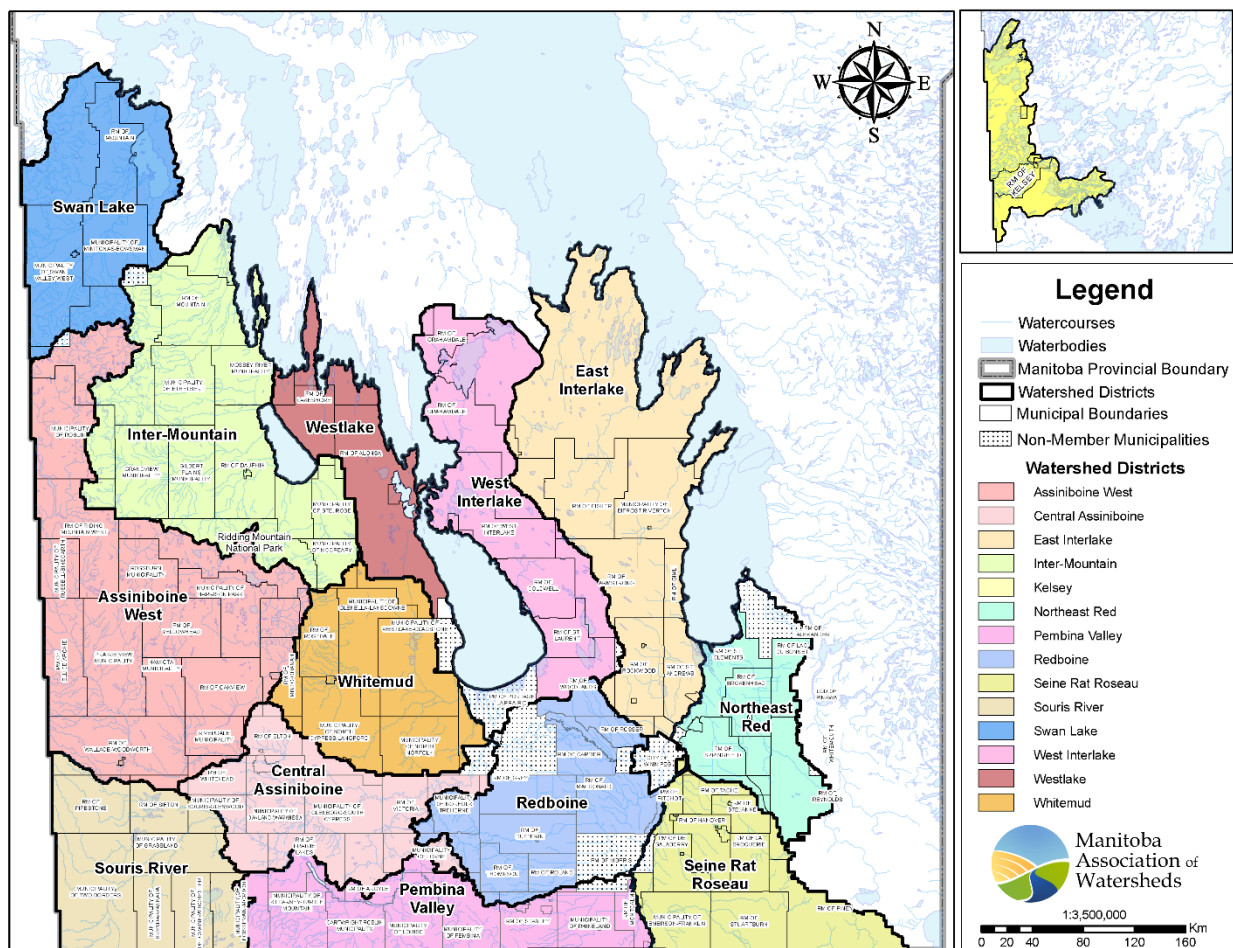


Figure 2: Manitoba Watershed District Boundaries. There are 14 total watershed districts. Map provided by Manitoba Association of Watersheds (updated July 2022).

2023 Results – PVWD Summary

Table 2: Summary of LWCBMN results in PVWD. Letters correspond to drainage areas in Figure 3. Data shown represents sites with sampling efforts adequate to calculate loads/exports. ¹See footnotes for explanation of acronyms/abbreviations.

	Site Name	WSC Station	GDA (km ²)	IDA (km ²)	Gross/Incr.	TP load (tonnes/y)	TP export (kg/ha/y)
A	Badger Creek Near Cartwright	05OA007	1547.24	NA	Gross	55.03	0.36
B	Buffalo Creek Near Rosenfeld	05OC019	796.52	NA	Gross	57.57	0.72
C	Cypress Creek Near Clearwater	05OB010	396.28	NA	Gross	27.72	0.70
D	Deadhorse Creek Near Rosenfeld	05OC016	924.31	NA	Gross	32.10	0.35
E	Kronsgart Drain Near Sewell	05OC024	61.65	NA	Gross	5.88	0.95
F	Mowbray Creek Near Mowbray	05OB021	272.17	NA	Gross	12.90	0.47
G	Pembina River Above Lorne Lake	05OA010	1210.97	720.33	Incr.	8.59	0.12
H	Pembina River Below Crystal Creek	05OB023	4726.71	1572.22	Incr.	24.17	0.15
I	Pembina River Downstream of Swan Lake Outlet	05OB019	5154.42	427.71	Incr.	-20.09	-0.47
J	Pembina River Near La Riviere	05OB001	5574.71	420.29	Incr.	36.28	0.86
K	Pembina River Near Windygates	05OB007	7791.79	950.62	Incr.	68.23	0.72
L	Pembina River North of Killarney	05OA001	490.64	NA	Gross	17.94	0.37
M	Riviere Aux Marais Near Christie	05OC022	187.05	NA	Gross	20.19	1.08
N	Snowflake Creek Near Snowflake	05OB016	994.3	NA	Gross	34.11	0.34

To compare results to other years of data, please see LWCBMN regional reports online at <https://lakewinnipegfoundation.org/lwcbmn-regional-reports>

¹ WSC = Water Survey of Canada.

GDA = gross drainage area (i.e., the total watershed area).

IDA = incremental drainage area (i.e., the total watershed area minus the total watershed area of any contained upstream sites with data adequate for load/export calculation).

Gross/Incr. = whether or not the adjacent TP load/export listed is from the gross or incremental (“Incr.”) drainage area of a site.

2023 Results – Hotspot Map

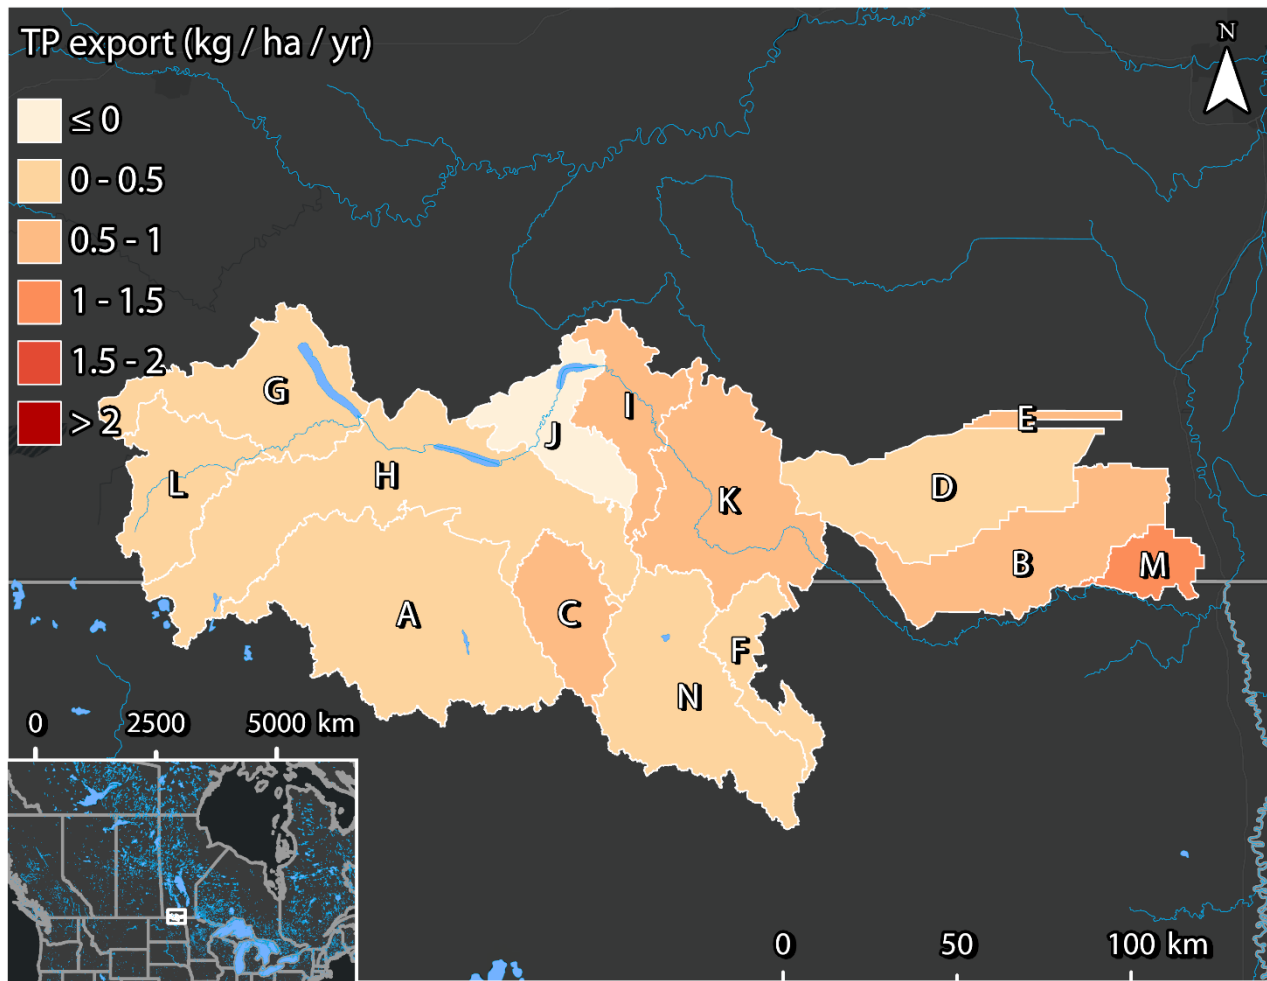


Figure 3: 2023 LWCBMN TP Export Hotspots in Pembina Valley. Letters correspond to the sites listed in Table 2.

2023 Results – Individual Sites

Badger Creek near Cartwright

Badger Creek is located south of the Pembina River. The majority of the Badger Creek drainage area is located in North Dakota, and includes the Rural Municipality of Cartwright, MB, and the city of Rolla, ND. This sampling site is located at Water Survey of Canada station 05OA007, near Cartwright. The sampling effort provided excellent coverage to calculate TP loads and exports.

Table 3: Indices of discharge and phosphorus from the gross drainage area of Badger Creek near Cartwright (05OA007).

Badger Creek Near Cartwright - 2023	
Gross/Incremental	Gross
Drainage area (km ²)	1547.2
Water load (km ³ /year)	0.07
Water export (mm/year)	42.1
Spring water load	93.60%
Spring TP load	94.36%
TP load (tonnes P/year)	55.0
TDP load (tonnes P/year)	52.9
TP export (kg P/ha/year)	0.36
TDP export (kg P/ha/year)	0.34
% of TP as TDP	96.18%

BADGER CREEK NEAR CARTWRIGHT

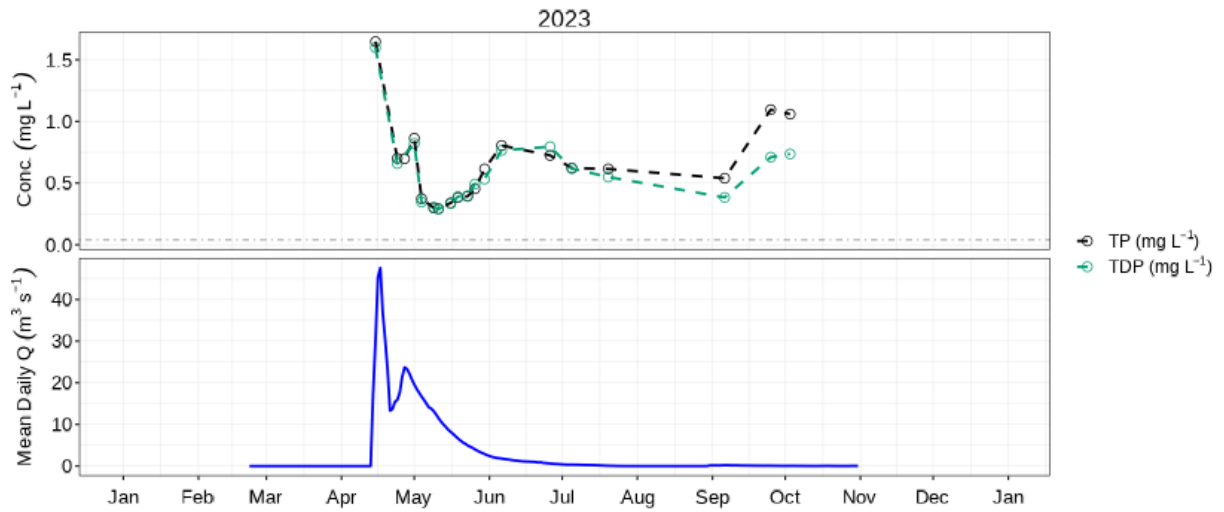


Figure 4: Mean daily discharge (blue) with TP (black) & TDP concentration (green) at Badger Creek near Cartwright (05OA007).

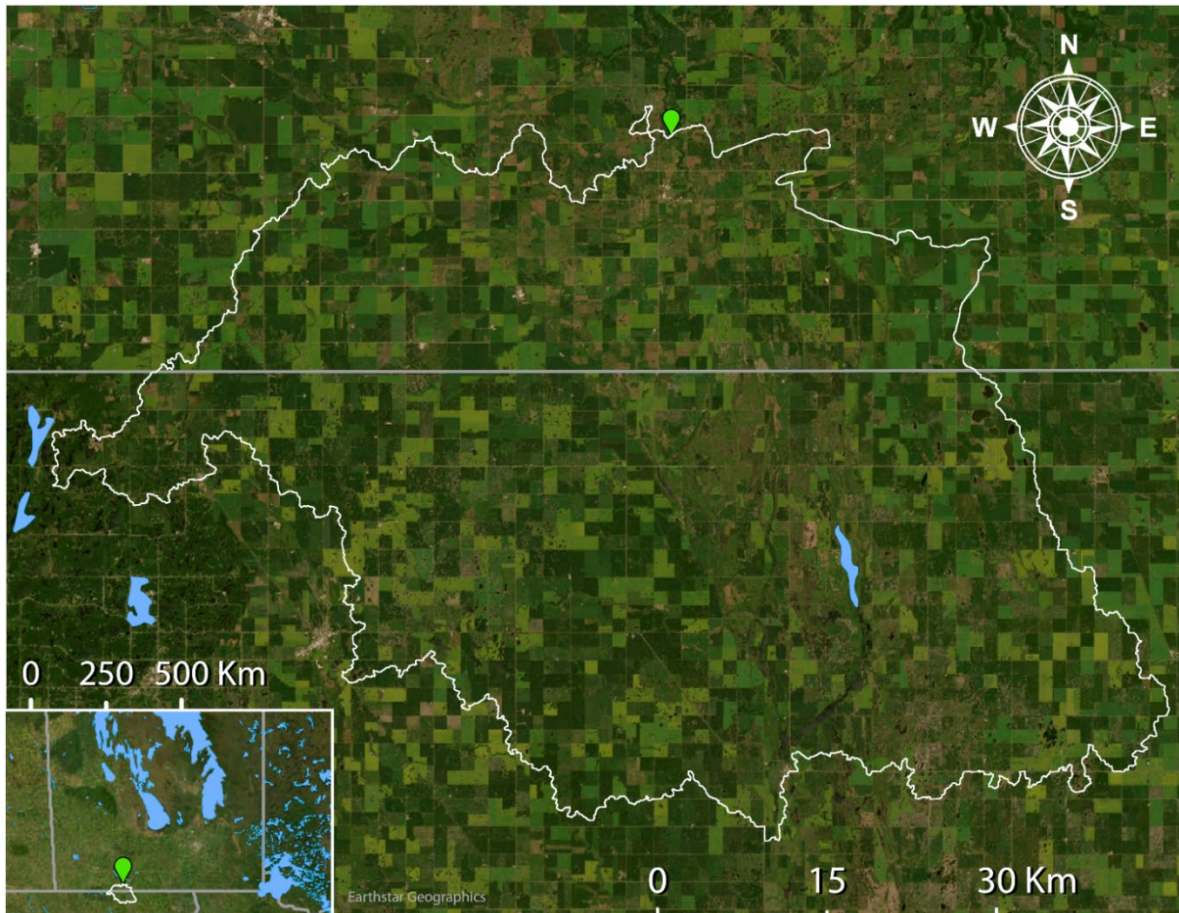


Figure 5: WSC station 05OA007 (green) and drainage area polygon (white – source: WSC). LWCBMN samples directly at the WSC station.

Buffalo Creek near Rosenfeld

Buffalo Creek is located downstream of Rosenfeld, MB and upstream of St. Jean Baptiste, MB. The gross drainage contains primarily agricultural land. This sampling site is located at Water Survey of Canada flow meter 05OC019, near Rosenfeld, MB. The sampling effort provided adequate coverage to calculate TP loads and exports.

Table 4: Indices of discharge and phosphorus from the gross drainage area of Buffalo Creek near Rosenfeld (05OC019).

Buffalo Creek Near Rosenfeld - 2023	
Gross/Incremental	Gross
Drainage area (km ²)	796.5
Water load (km ³ /year)	0.06
Water export (mm/year)	77.7
Spring water load	98.96%
Spring TP load	99.65%
TP load (tonnes P/year)	57.6
TDP load (tonnes P/year)	47.8
TP export (kg P/ha/year)	0.72
TDP export (kg P/ha/year)	0.60
% of TP as TDP	83.08%

BUFFALO CREEK NEAR ROSENFELD

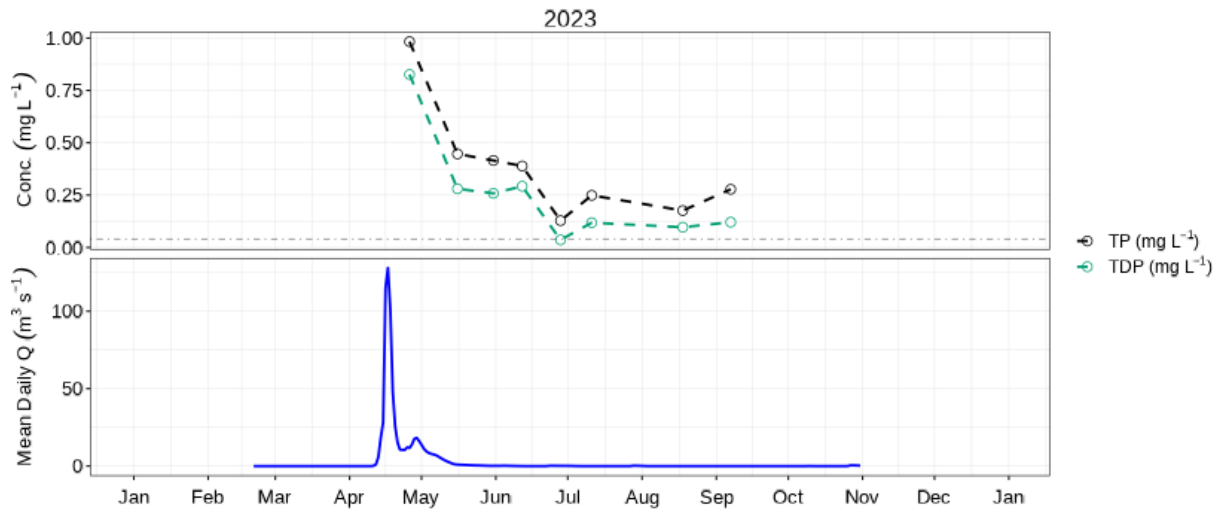


Figure 6: Mean daily discharge (blue) with TP (black) & TDP concentration (green) at Buffalo Creek near Rosenfeld (05OC019).

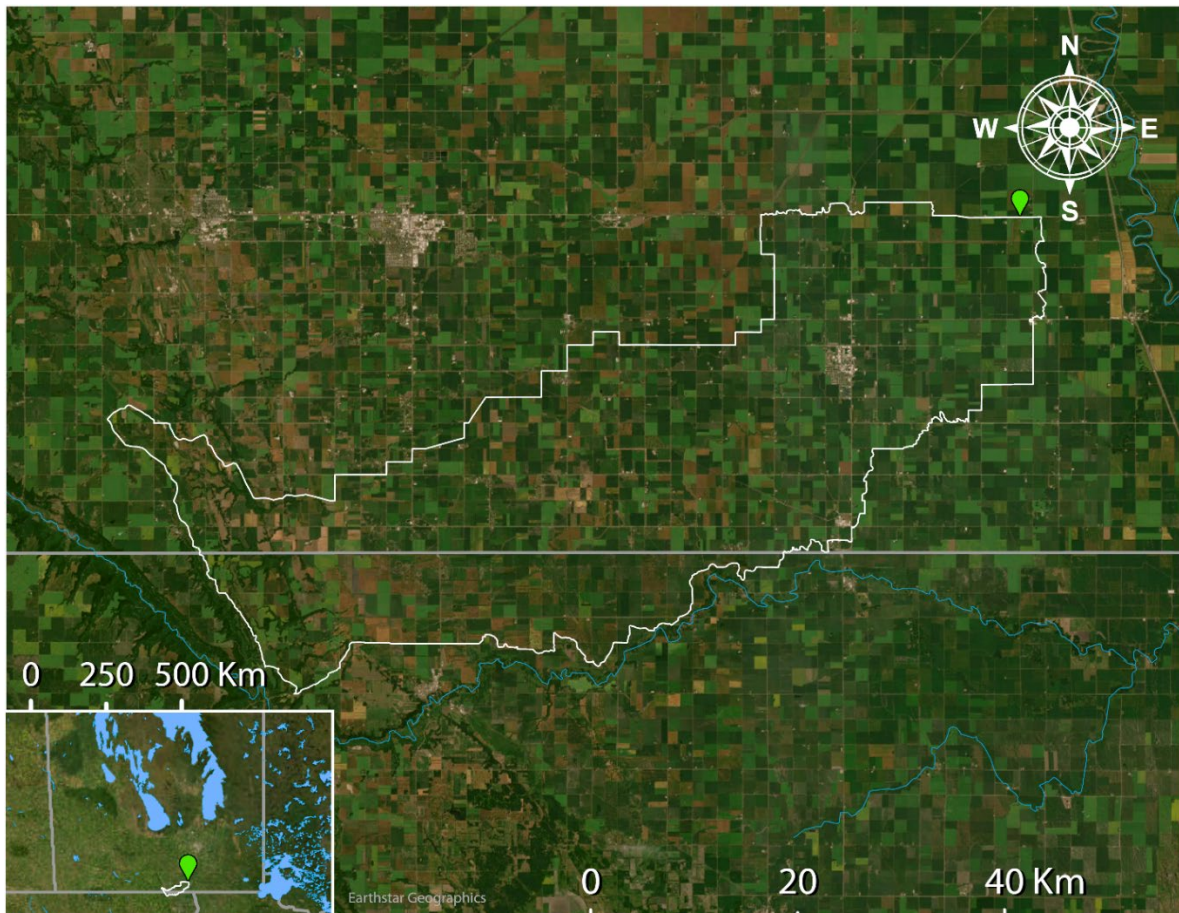


Figure 7: WSC station 05OC019 (green) and drainage area polygon (white - source: AAFC). LWCBMN samples directly at the WSC station.

Cypress Creek near Clearwater

Cypress Creek is located south of the Pembina River. The drainage area for sampling site includes portions of Manitoba and North Dakota. It drains a largely agricultural area. This sampling site is located at Water Survey of Canada flow meter 05OB010, near Clearwater. The sampling effort provided excellent coverage to calculate TP loads and exports.

Table 5: Indices of discharge and phosphorus from the gross drainage area of Cypress Creek near Clearwater (05OB010).

Cypress Creek Near Clearwater - 2023	
Gross/Incremental	Gross
Drainage area (km ²)	396.3
Water load (km ³ /year)	0.03
Water export (mm/year)	66.9
Spring water load	99.44%
Spring TP load	99.76%
TP load (tonnes P/year)	27.7
TDP load (tonnes P/year)	27.3
TP export (kg P/ha/year)	0.70
TDP export (kg P/ha/year)	0.69
% of TP as TDP	98.35%

CYPRESS CREEK NEAR CLEARWATER

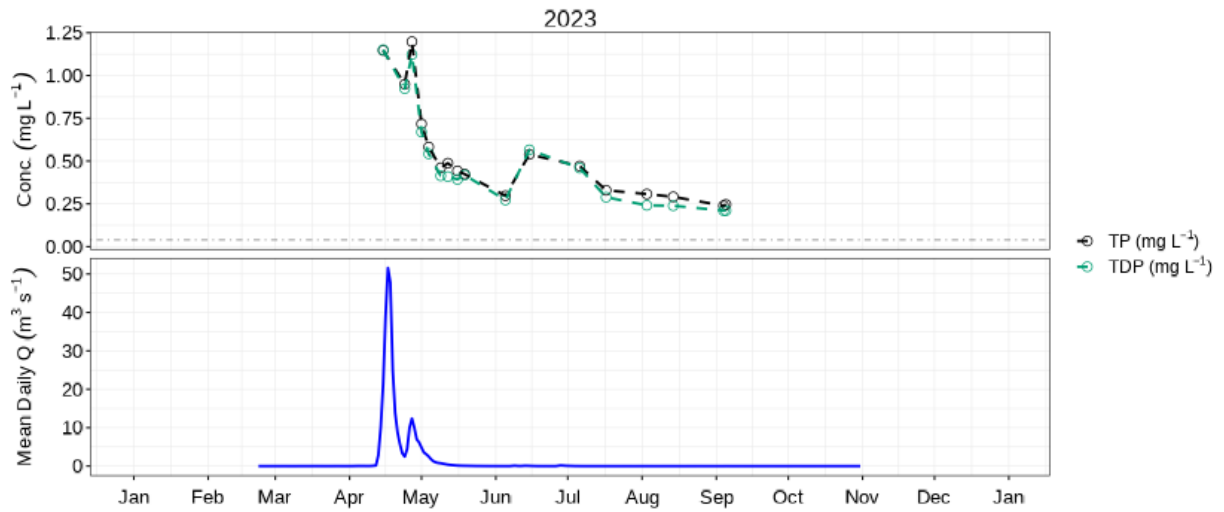


Figure 8: Mean daily discharge (blue) with TP (black) & TDP concentration (green) at Cypress Creek near Clearwater (05OB010).

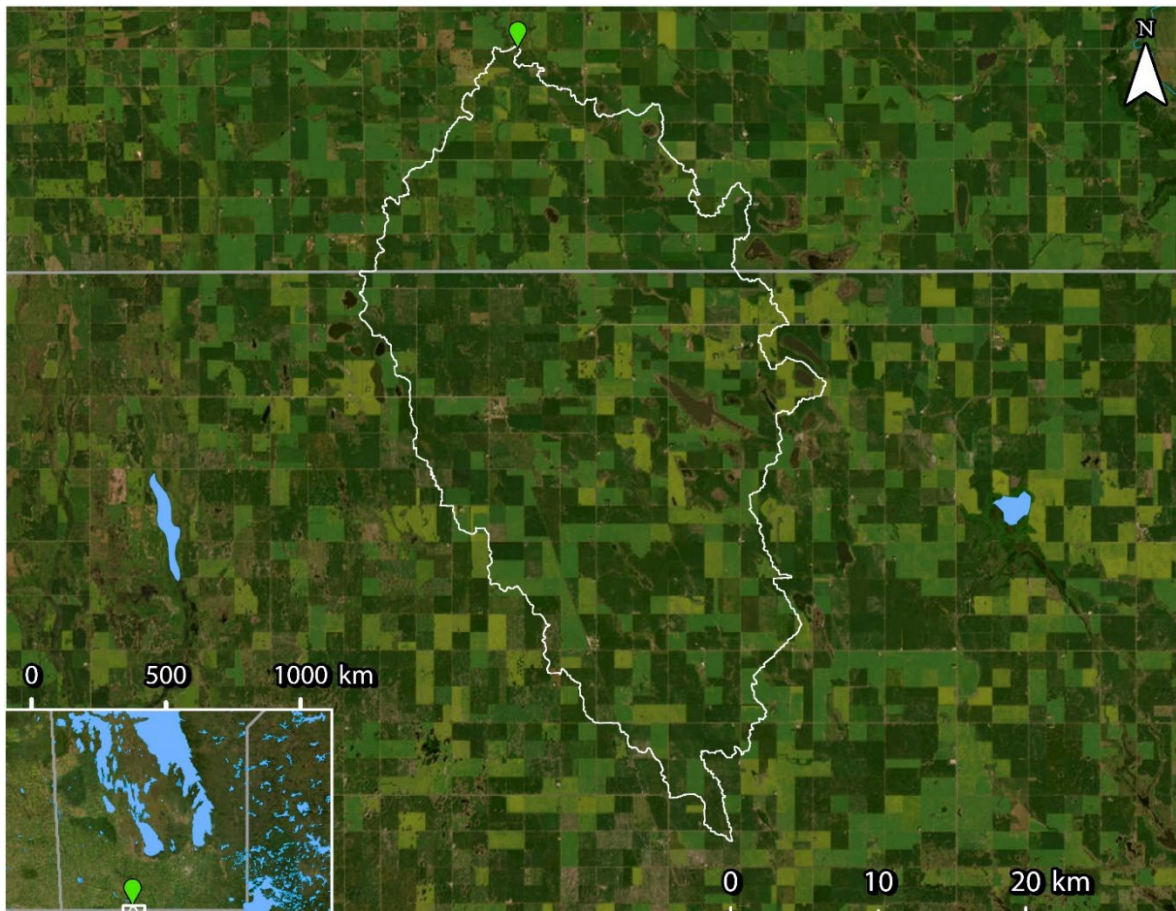


Figure 9: WSC station 05OB010 (green) and drainage area polygon (white – source: WSC). LWCBMN samples directly at the WSC station.

Deadhorse Creek near Rosenfeld

The gross drainage area for this site contains primarily agricultural area, and includes the city and wastewater lagoon of Morden, MB, as well as the wastewater lagoons of Winkler and Plum Coulee, MB. It is located downstream of the inlet where the Plum Drain enters Deadhorse Creek. This sampling site is located at Water Survey of Canada flow meter 05OC016, near Rosenfeld, MB. The sampling effort provided excellent coverage to calculate TP loads and exports.

Table 6: Indices of discharge and phosphorus from the gross drainage area of Deadhorse Creek near Rosenfeld (05OC016).

Deadhorse Creek Near Rosenfeld - 2023	
Gross/Incremental	Gross
Drainage area (km²)	924.3
Water load (km³/year)	0.05
Water export (mm/year)	53.3
Spring water load	96.09%
Spring TP load	97.26%
TP load (tonnes P/year)	32.1
TDP load (tonnes P/year)	30.9
TP export (kg P/ha/year)	0.35
TDP export (kg P/ha/year)	0.33
% of TP as TDP	96.15%

DEADHORSE CREEK NEAR ROSENFELD

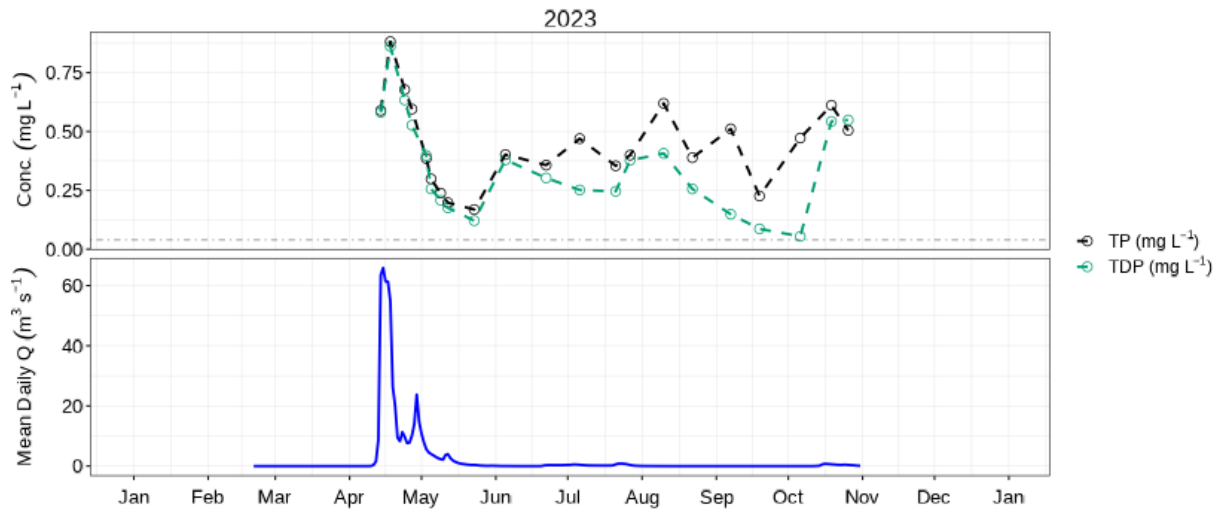


Figure 10: Mean daily discharge (blue) with TP (black) & TDP concentration (green) at Deadhorse Creek near Rosenfeld (05OC016).

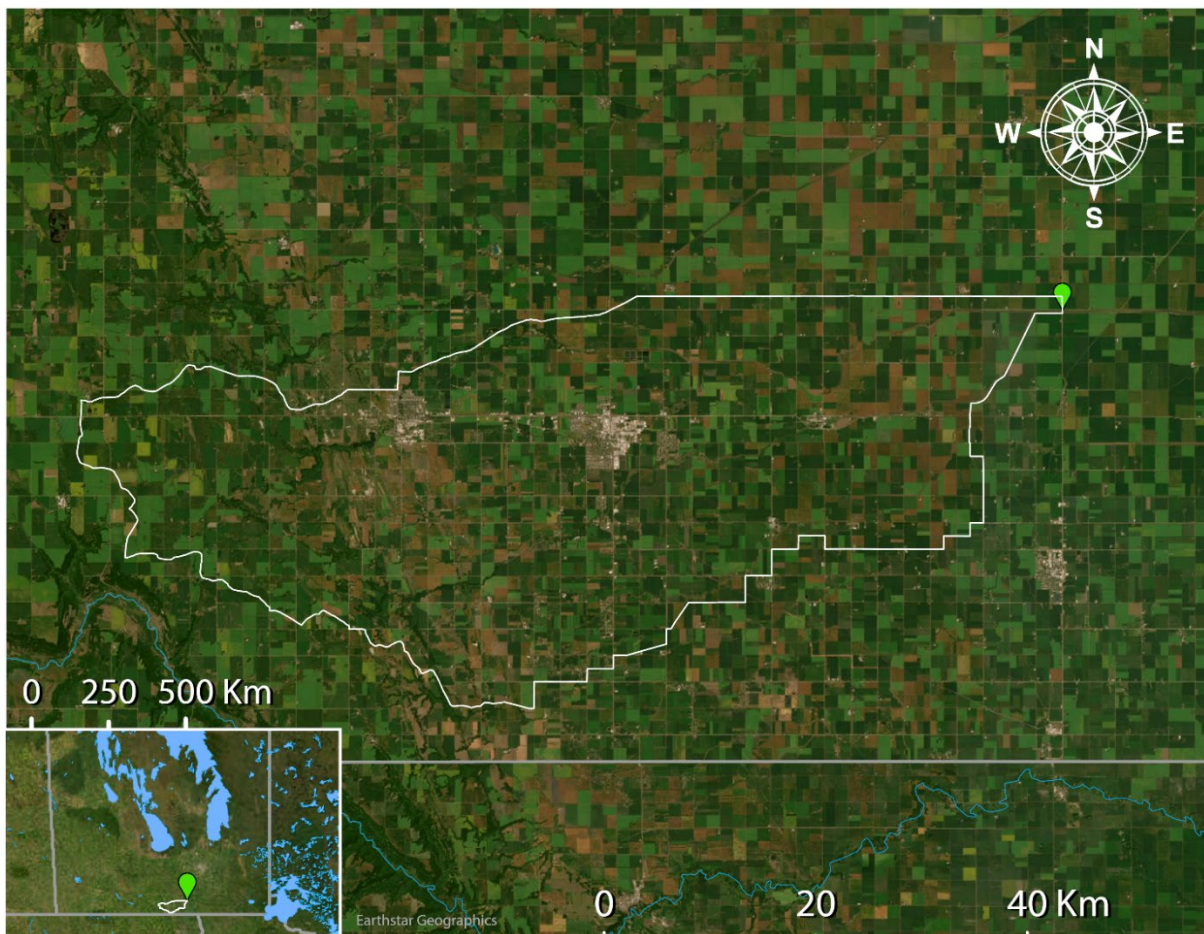


Figure 11: WSC station 05OC016 (green) and drainage area polygon (white – source: AAFC). LWCBMN samples directly at the WSC station.

Kronsgart Drain near Sewell

This sampling site is located upstream of Sewell, MB and drains a largely agricultural area. This sampling site is located at Water Survey of Canada station 05OC024, near Sewell, MB. The sampling effort provided adequate coverage to calculate TP loads and exports.

Table 7: Indices of discharge and phosphorus from the gross drainage area of Kronsgart Drain near Sewell (05OC024).

Kronsgart Drain Near Sewell - 2023	
Gross/Incremental	Gross
Drainage area (km ²)	61.6
Water load (km ³ /year)	0.01
Water export (mm/year)	111.0
Spring water load	100.00%
Spring TP load	100.00%
TP load (tonnes P/year)	5.9
TDP load (tonnes P/year)	4.0
TP export (kg P/ha/year)	0.95
TDP export (kg P/ha/year)	0.66
% of TP as TDP	68.73%

KRONSGART DRAIN NEAR SEWELL

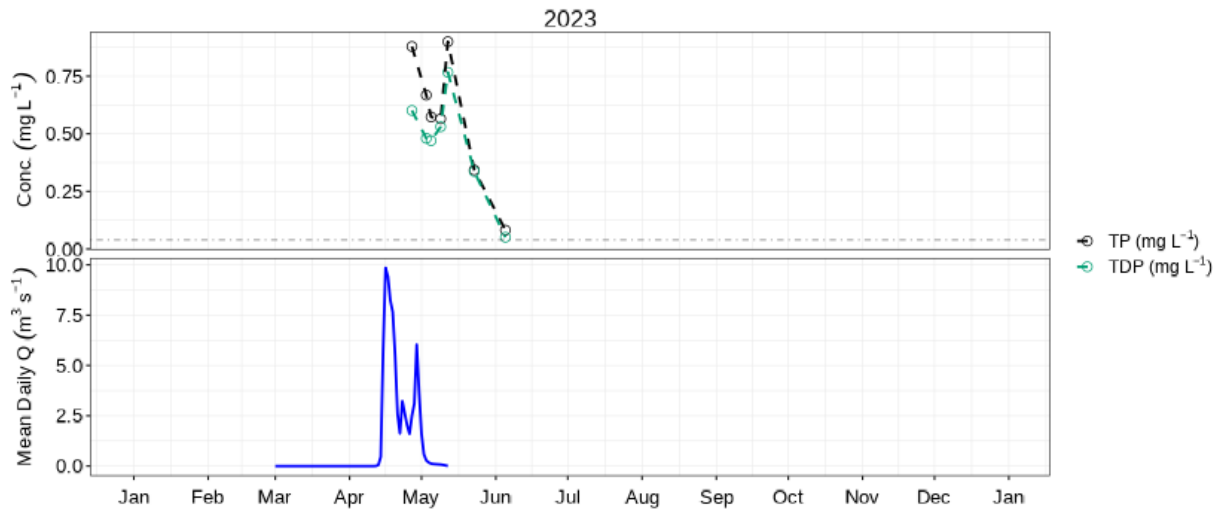


Figure 12: Mean daily discharge (blue) with TP (black) & TDP concentration (green) at Krongart Drain near Sewell (05OC024).

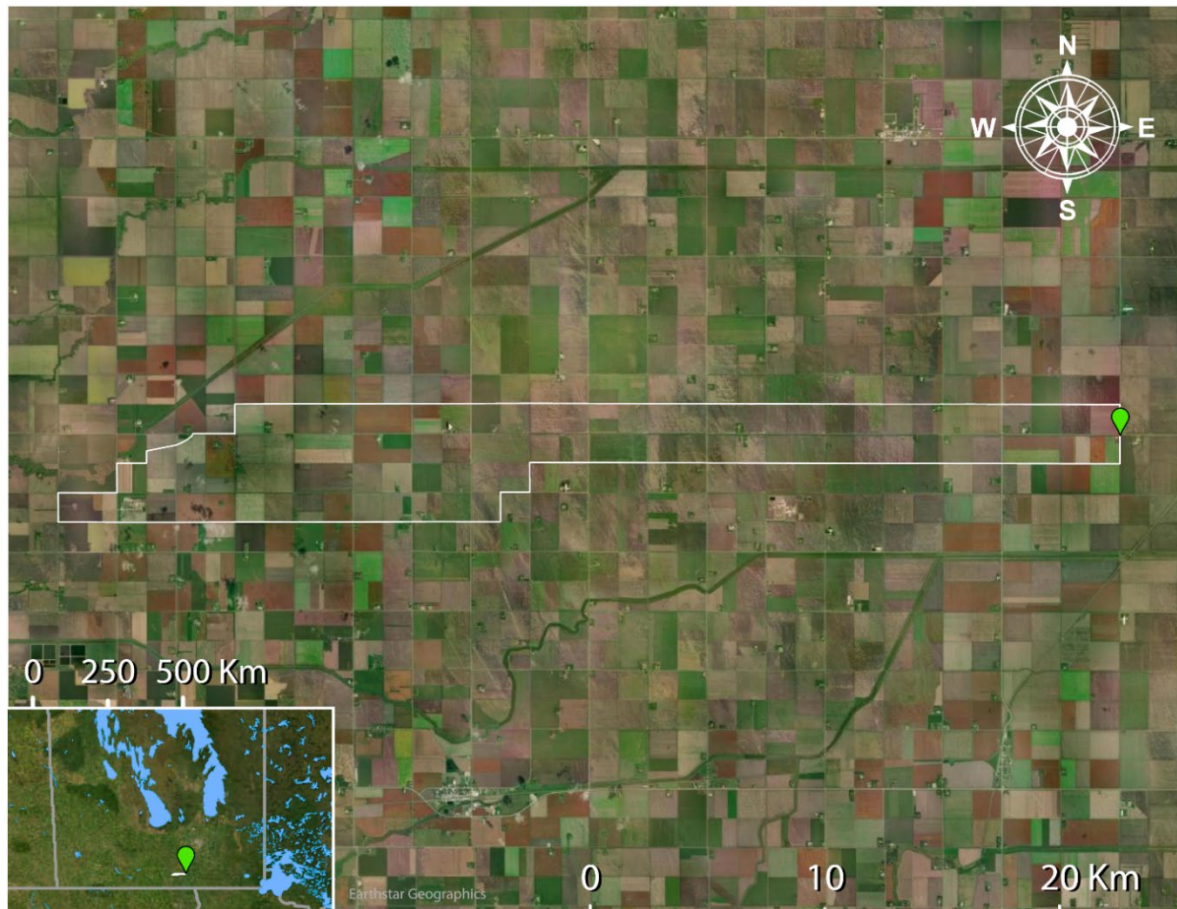


Figure 13: WSC station 05OC024 (green) and drainage area polygon (white – source: AAFC). LWCBMN samples directly at the WSC station.

Mowbray Creek near Mowbray

Mowbray Creek is located south of the Pembina River. The majority of the Mowbray Creek drainage area is located in North Dakota. The drainage area for this sampling site drains a portion of the Rural Municipality of Mowbray, MB, as well as the city of Langdon, ND. This sampling site is located at Water Survey of Canada flow meter 05OB021, near Mowbray. The sampling effort provided excellent coverage to calculate TP loads and exports.

Table 8: Indices of discharge and phosphorus from the gross drainage area of Mowbray Creek near Mowbray (05OB021).

Mowbray Creek Near Mowbray - 2023	
Gross/Incremental	Gross
Drainage area (km ²)	272.2
Water load (km ³ /year)	0.01
Water export (mm/year)	50.9
Spring water load	98.93%
Spring TP load	99.51%
TP load (tonnes P/year)	12.9
TDP load (tonnes P/year)	11.0
TP export (kg P/ha/year)	0.47
TDP export (kg P/ha/year)	0.40
% of TP as TDP	85.38%

MOWBRAY CREEK NEAR MOWBRAY

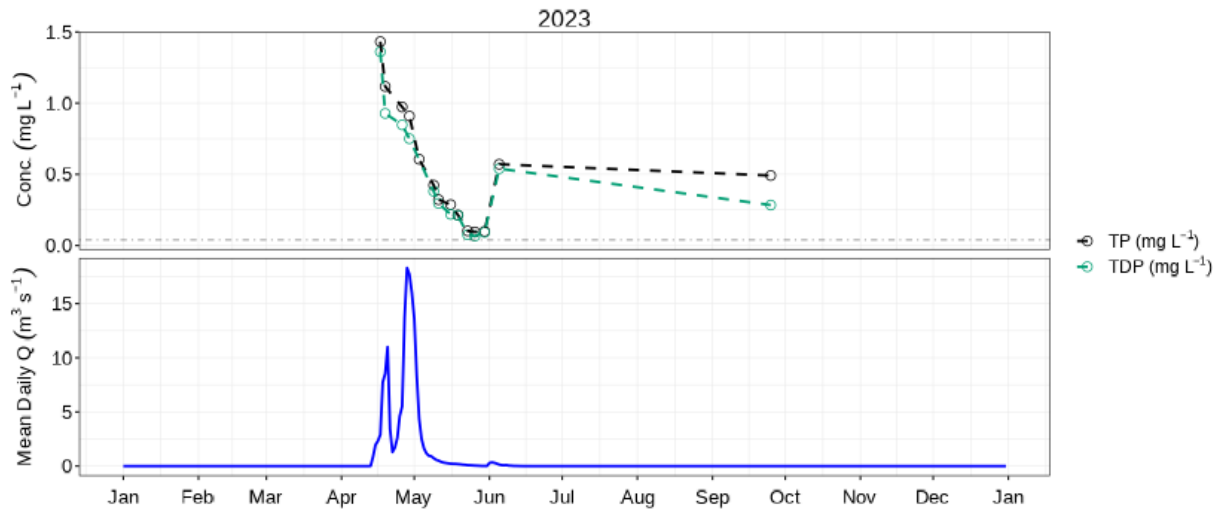


Figure 14: Mean daily discharge (blue) with TP (black) & TDP concentration (green) at Mowbray Creek near Mowbray (05OB021).

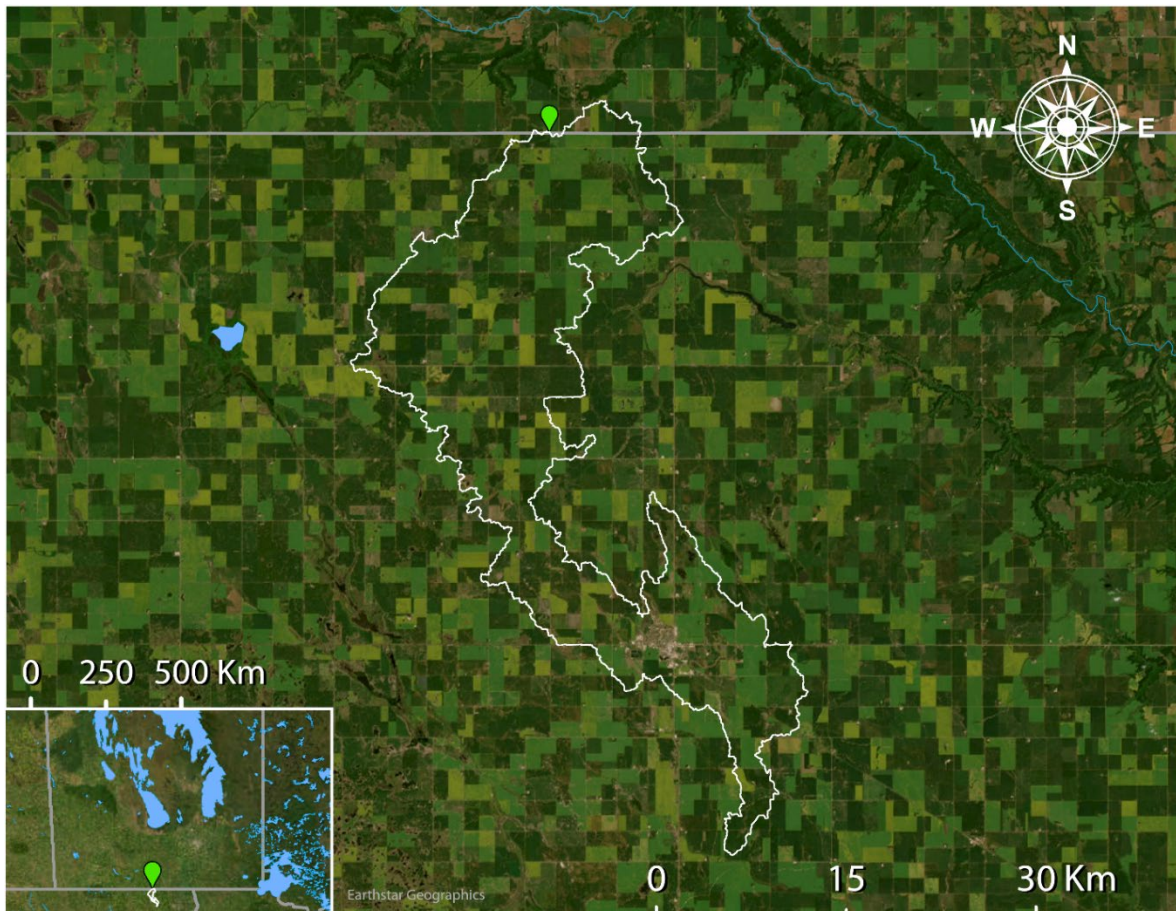


Figure 15: WSC station 05OB021 (green) and drainage area polygon (white - source: WSC). LWCBMN samples directly at the WSC station.

Pembina River above Lorne Lake

The incremental drainage area for this stretch of the Pembina River contains a largely agricultural area, as well as the town of Ninette and Pelican Lake. This sampling site is located at Water Survey of Canada station 05OA010. The sampling effort provided adequate coverage to calculate TP loads and exports.

Table 9: Indices of discharge and phosphorus from the incremental drainage area of Pembina River above Lorne Lake (05OA010). See Supplemental Table 1 for gross calculations.

Pembina River Above Lorne Lake - 2023	
Gross/Incremental	Incremental
Drainage area (km ²)	720.3
Water load (km ³ /year)	0.01
Water export (mm/year)	13.7
Spring water load	96.68%
Spring TP load	98.61%
TP load (tonnes P/year)	8.6
TDP load (tonnes P/year)	7.5
TP export (kg P/ha/year)	0.12
TDP export (kg P/ha/year)	0.10
% of TP as TDP	90.98%

PEMBINA RIVER ABOVE LORNE LAKE

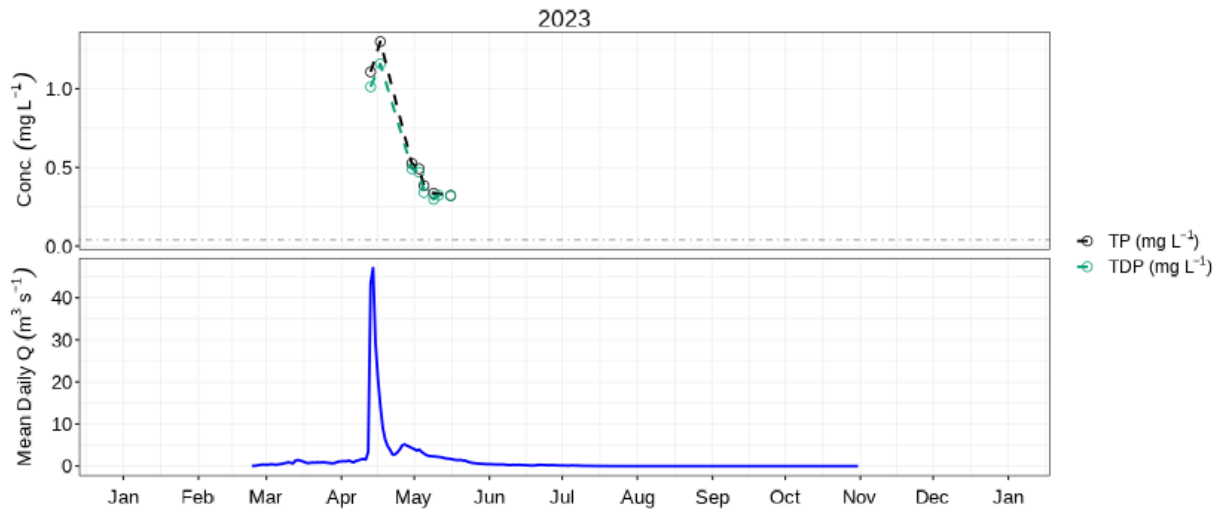


Figure 16: Mean daily discharge (blue) with TP (black) & TDP concentration (green) at Pembina River near La Rivière (05OB001).

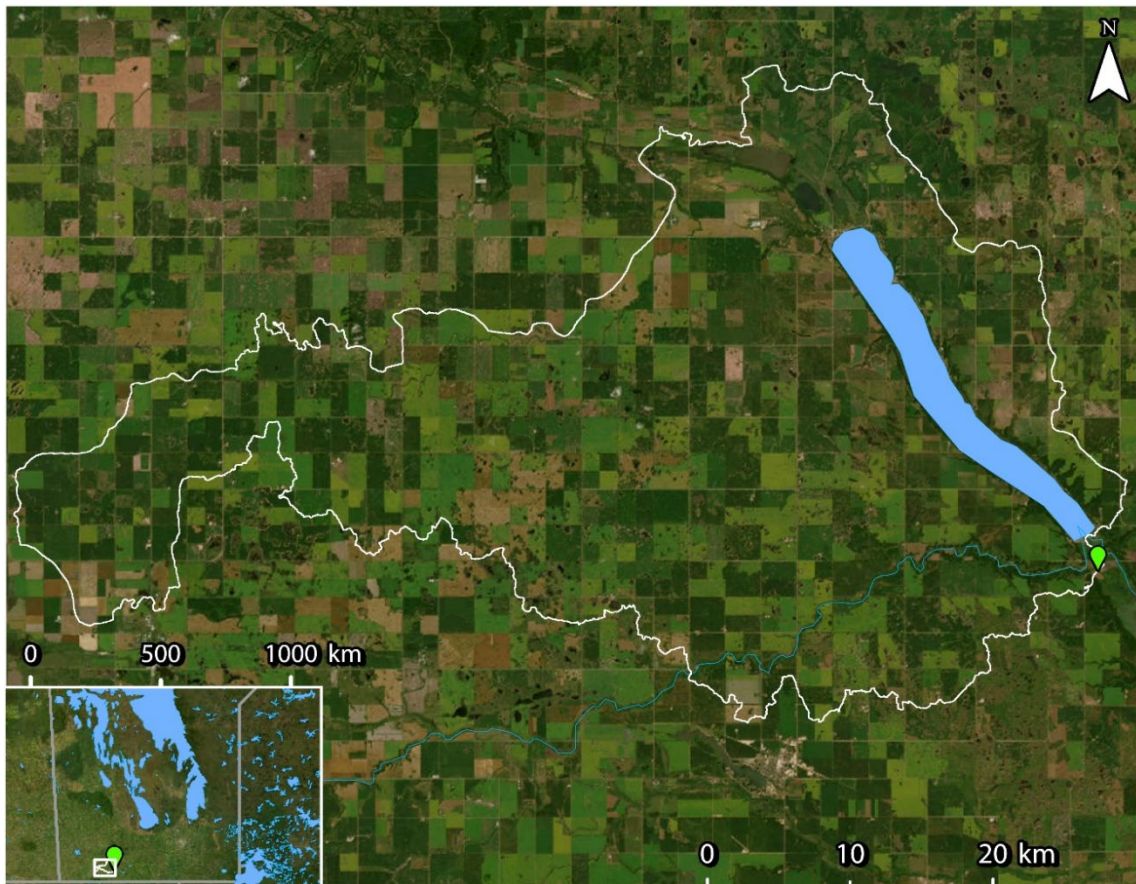


Figure 17: WSC station 05OA010 (green), and incremental drainage area polygon (white - source: WSC). See Supplemental Figure 1 for upstream drainage areas used to calculate incremental area. LWCBMN samples directly at the WSC station.

Pembina River below Crystal Creek

This stretch of the Pembina River drains a largely agricultural incremental drainage area. This sampling site is located at Water Survey of Canada station 05OB023, north of Crystal Creek. The sampling effort provided adequate coverage to calculate TP loads and exports.

Table 10: Indices of discharge and phosphorus from the incremental drainage area of Pembina River below Crystal Creek (05OB023). See Supplemental Table 2 for gross calculations.

Pembina River Below Crystal Creek - 2023	
Gross/Incremental	Incremental
Drainage area (km²)	1572.2
Water load (km³/year)	0.07
Water export (mm/year)	43.4
Spring water load	83.31%
Spring TP load	89.93%
TP load (tonnes P/year)	24.2
TDP load (tonnes P/year)	7.3
TP export (kg P/ha/year)	0.15
TDP export (kg P/ha/year)	0.05
% of TP as TDP	83.62%

PEMBINA RIVER BELOW CRYSTAL CREEK

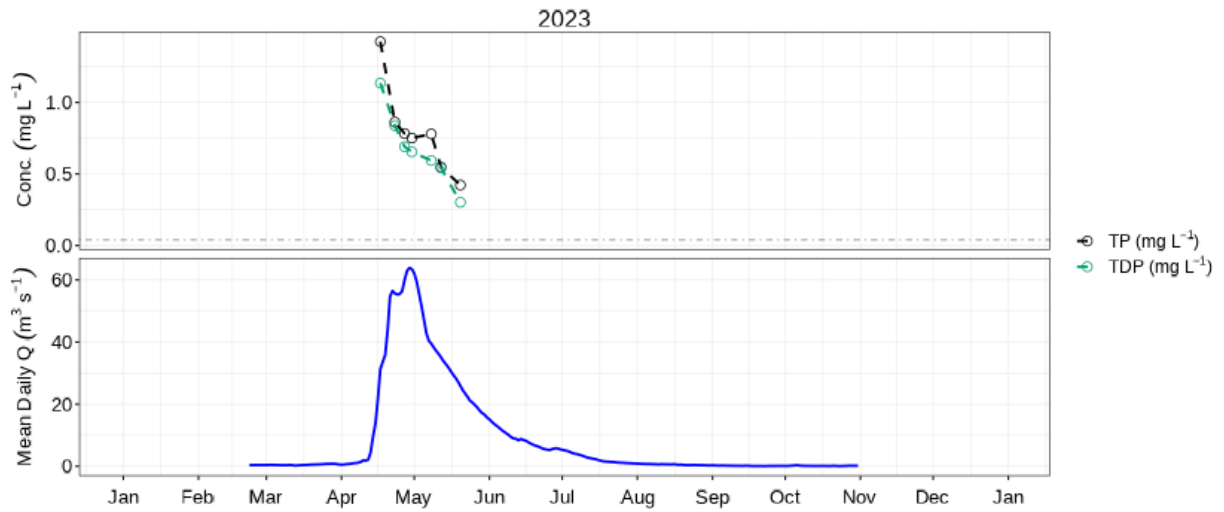


Figure 18: Mean daily discharge (blue) with TP (black) & TDP concentration (green) at Pembina River below Crystal Creek (05OB023).

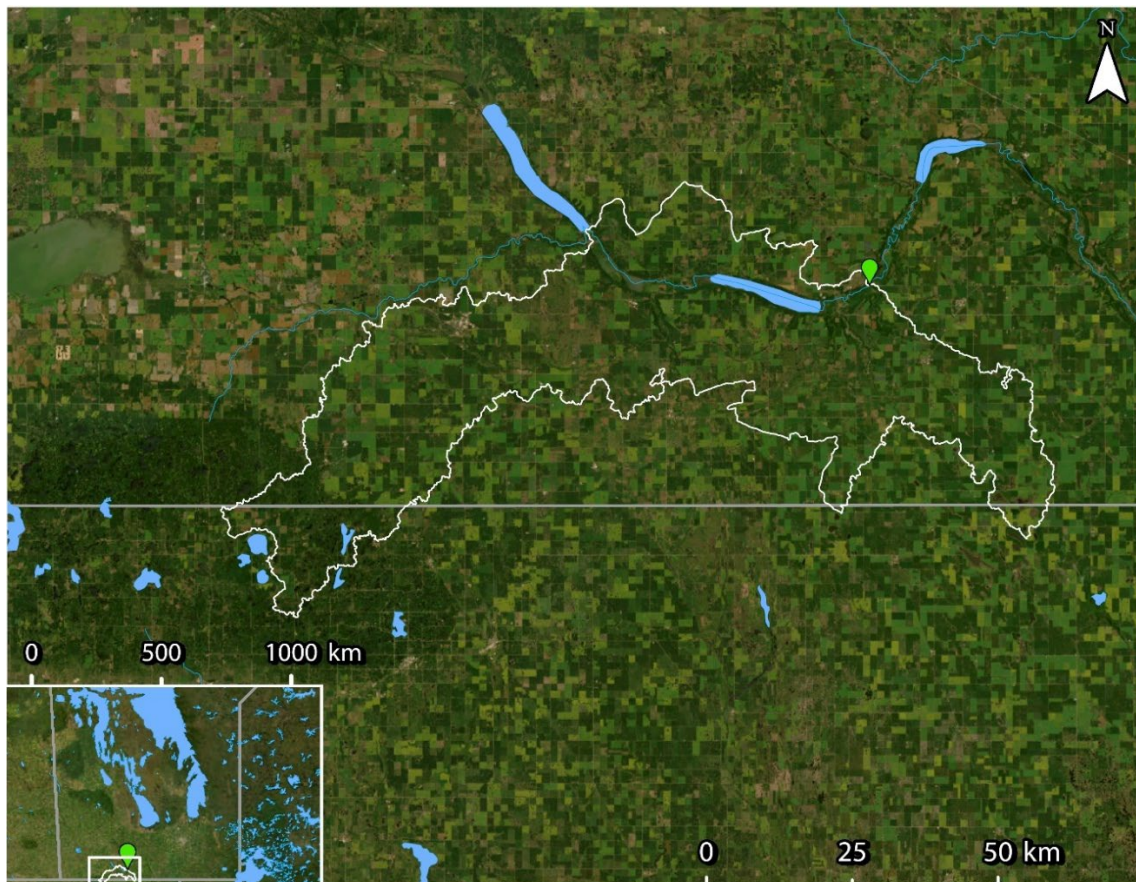


Figure 19: WSC station 05OB023 (green), and incremental drainage area polygon (white - source: WSC). See Supplemental Figure 2 for upstream drainage areas used to calculate incremental area. LWCBMN samples directly at the WSC station.

Pembina River downstream of Swan Lake Outlet

The incremental drainage area for this stretch of the Pembina River contains Swan Lake First Nation. This sampling site is located at Water Survey of Canada station 05OB019, downstream of Swan Lake. The sampling effort provided excellent coverage to calculate TP loads and exports.

Table 11: Indices of discharge and phosphorus from the incremental drainage area of Pembina River downstream of Swan Lake Outlet (05OB019). See Supplemental Table 3 for gross calculations.

Pembina River Downstream Of Swan Lake Outlet - 2023	
Gross/Incremental	Incremental
Drainage area (km²)	427.7
Water load (km³/year)	0.00
Water export (mm/year)	5.5
Spring water load	74.62%
Spring TP load	75.50%
TP load (tonnes P/year)	-20.09
TDP load (tonnes P/year)	-8.67
TP export (kg P/ha/year)	-0.47
TDP export (kg P/ha/year)	-0.20
% of TP as TDP	90.79%

PEMBINA RIVER DOWNSTREAM OF SWAN LAKE OUTLET

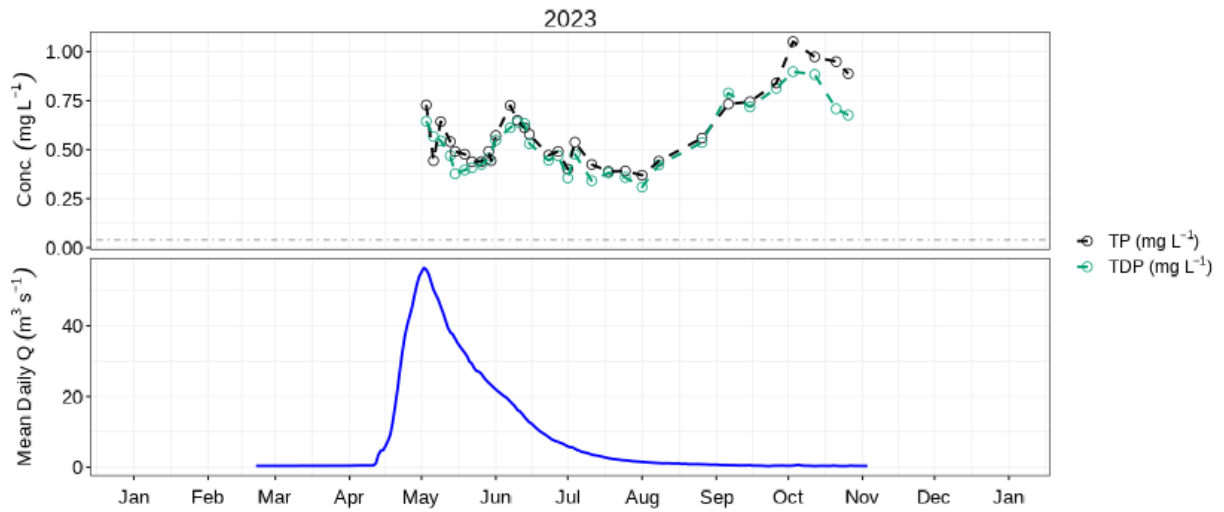


Figure 20: Mean daily discharge (blue) with TP (black) & TDP concentration (green) at Pembina River downstream of Swan Lake Outlet (05OB019).

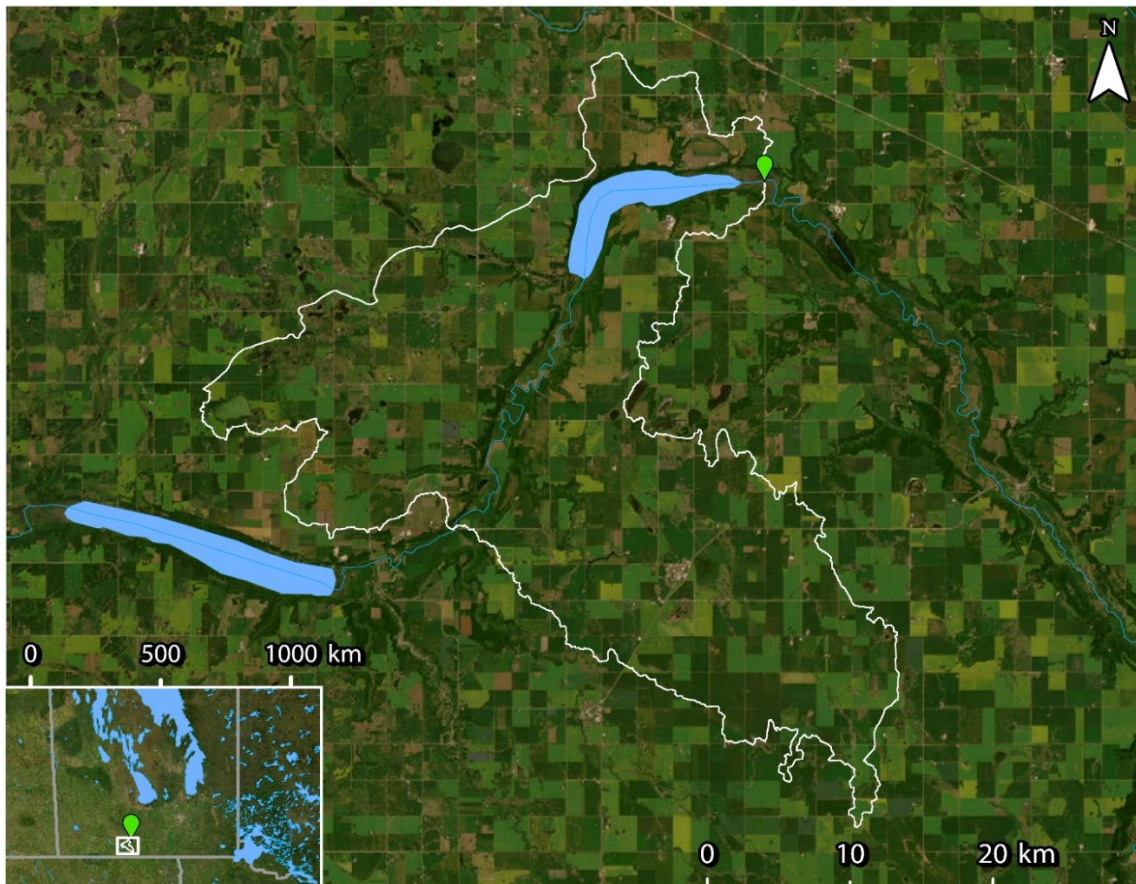


Figure 21: WSC station 05OB019 (green), and incremental drainage area polygon (white - source: WSC). See Supplemental Figure 3 for upstream drainage areas used to calculate incremental area. LWCBMN samples directly at the WSC station.

Pembina River near La Rivière

The incremental drainage area for this stretch of the Pembina River contains a largely agricultural area and includes the town of La Rivière, MB. This sampling site is located at Water Survey of Canada station 05OB001, near La Rivière. The sampling effort provided excellent coverage to calculate TP loads and exports.

Table 12: Indices of discharge and phosphorus from the incremental drainage area of Pembina River near La Rivière (05OB001). See Supplemental Table 4 for gross calculations.

Pembina River Near La Riviere - 2023	
Gross/Incremental	Incremental
Drainage area (km ²)	420.3
Water load (km ³ /year)	0.03
Water export (mm/year)	62.1
Spring water load	74.86%
Spring TP load	76.16%
TP load (tonnes P/year)	36.3
TDP load (tonnes P/year)	35.5
TP export (kg P/ha/year)	0.86
TDP export (kg P/ha/year)	0.84
% of TP as TDP	92.49%

PEMBINA RIVER NEAR LA RIVIERE

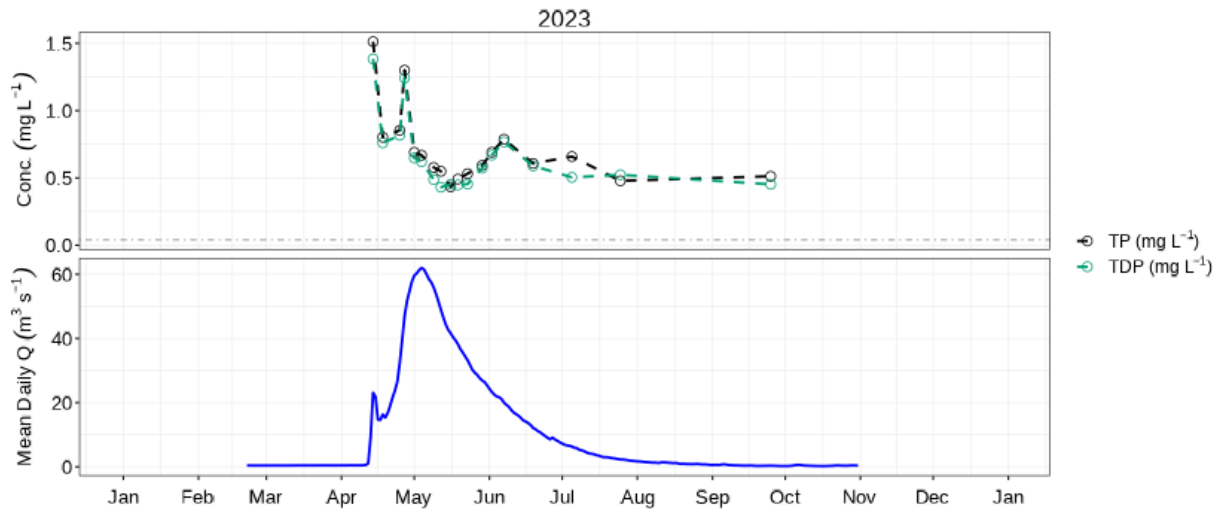


Figure 22: Mean daily discharge (blue) with TP (black) & TDP concentration (green) at Pembina River near La Rivière (05OB001).

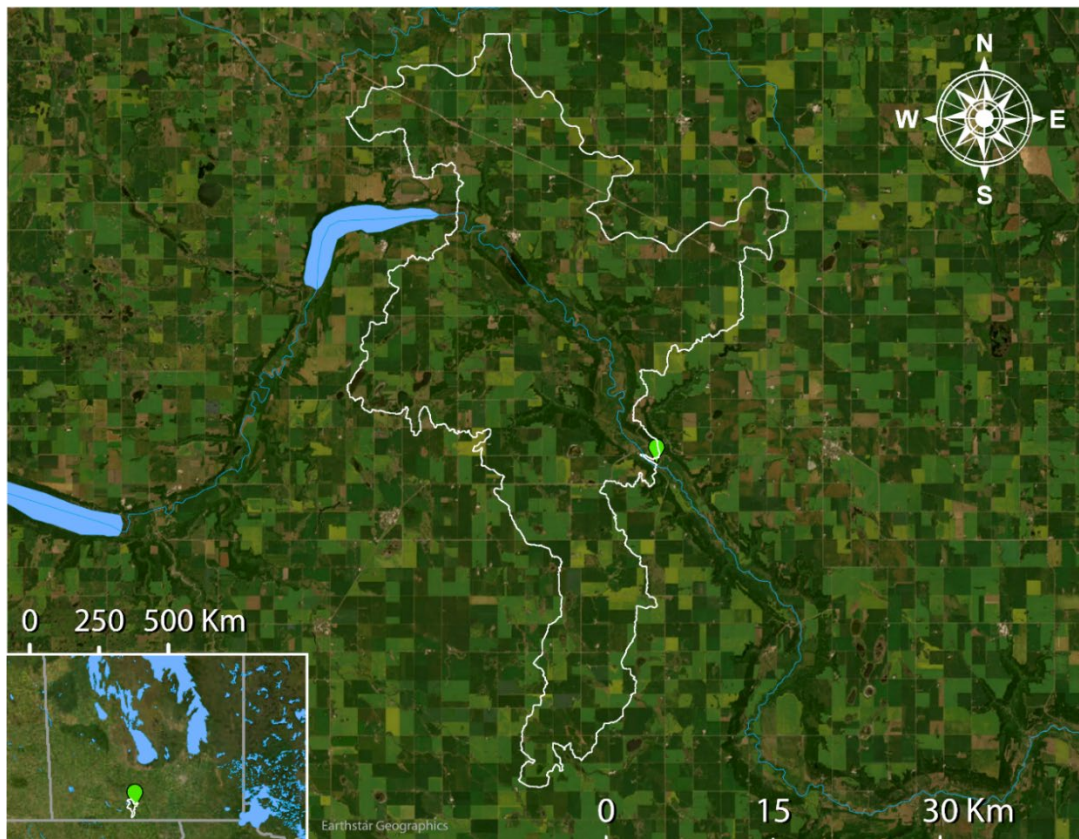


Figure 23: WSC station 05OB001 (green), and incremental drainage area polygon (white - source: WSC). See Supplemental Figure 4 for upstream drainage areas used to calculate incremental area. LWCMBN samples directly at the WSC station.

Pembina River near Windygates

The incremental drainage area for this stretch of the Pembina River contains a largely agricultural area. This sampling site is located at Water Survey of Canada station 05OB007, near Windygates, MB. The sampling effort provided excellent coverage to calculate TP loads and exports.

Table 13: Indices of discharge and phosphorus from the incremental drainage area of Pembina River near Windygates (05OB007). See Supplemental Table 5 for gross calculations.

Pembina River Near Windygates - 2023	
Gross/Incremental	Incremental
Drainage area (km ²)	950.6
Water load (km ³ /year)	0.05
Water export (mm/year)	55.5
Spring water load	80.04%
Spring TP load	85.86%
TP load (tonnes P/year)	68.2
TDP load (tonnes P/year)	5.4
TP export (kg P/ha/year)	0.72
TDP export (kg P/ha/year)	0.06
% of TP as TDP	68.63%

PEMBINA RIVER NEAR WINDYGATES

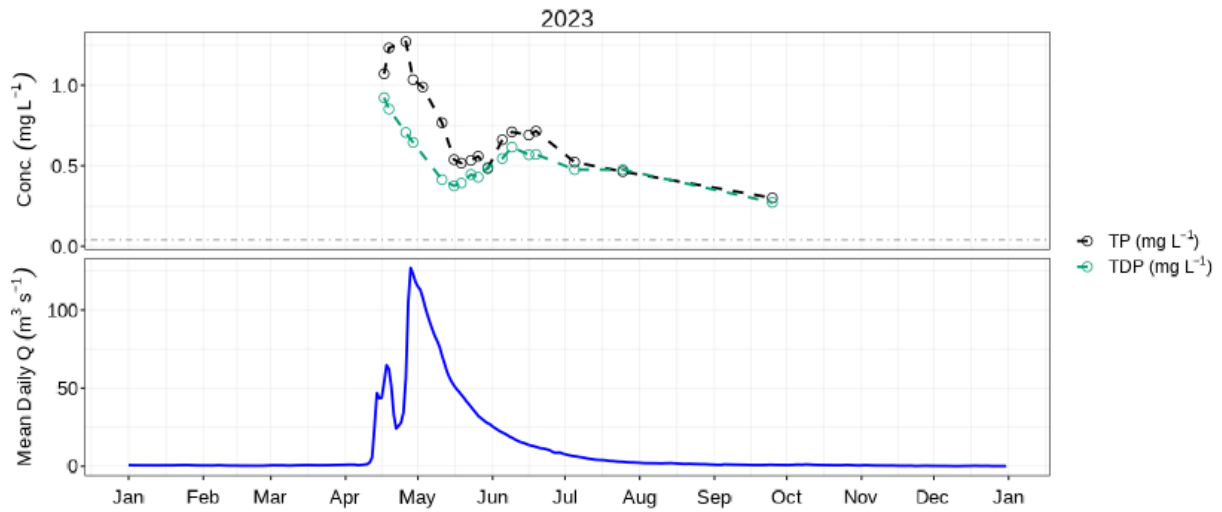


Figure 24: Mean daily discharge (blue) with TP (black) & TDP concentration (green) at Pembina River near Windygates (05OB007).

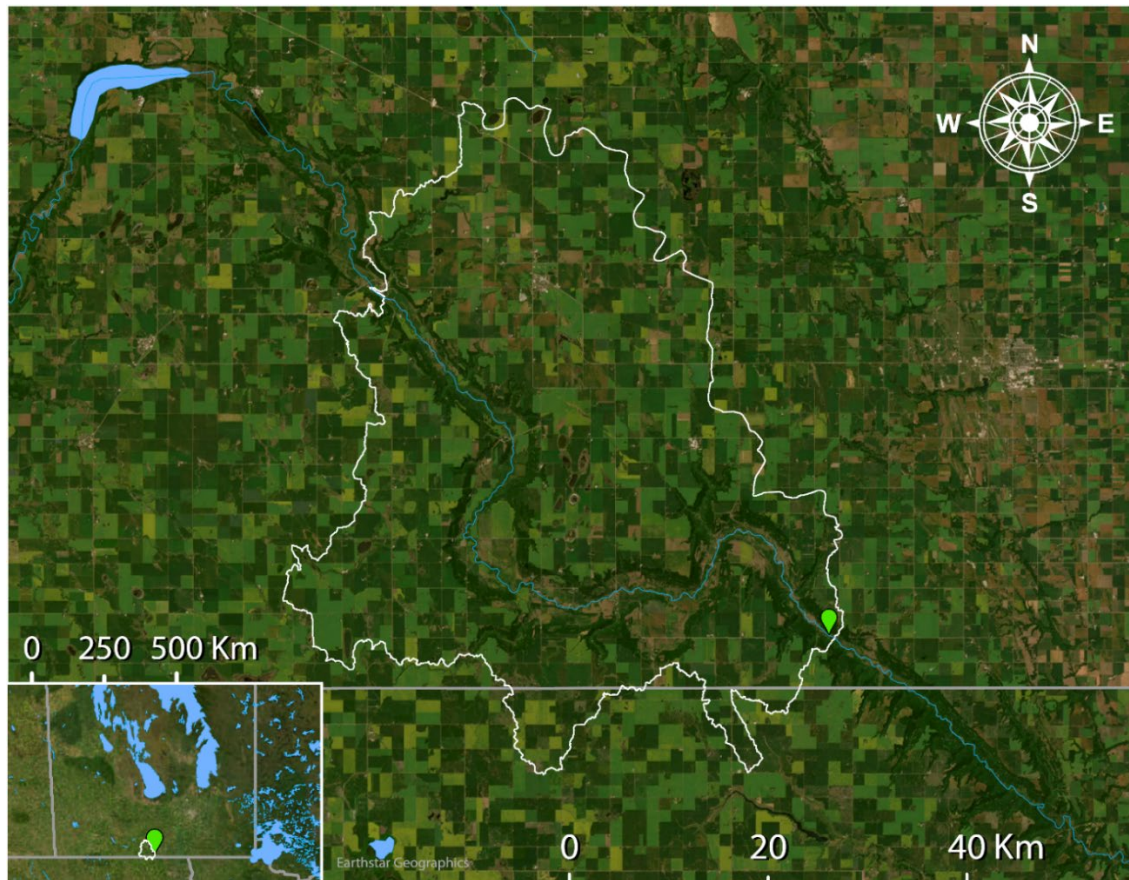


Figure 25: WSC station 05OB007 (green), and incremental drainage area polygon (white - source: WSC). See Supplemental Figure 5 for upstream drainage areas used to calculate incremental area. LWCBMN samples directly at the WSC station.

Pembina River north of Killarney

Pembina River north of Killarney (WSC station 05OA001) is the furthest upstream site along the Pembina River that is monitored by LWCBMN. The gross drainage contains primarily agricultural land, and the station itself is located just northwest of the town of Killarney and Killarney Lake. The sampling effort provided excellent coverage to calculate TP loads and exports.

Table 14: Indices of discharge and phosphorus from the gross drainage area of Pembina River north of Killarney (05OA001).

Pembina River North Of Killarney - 2023	
Gross/Incremental	Gross
Drainage area (km ²)	490.6
Water load (km ³ /year)	0.02
Water export (mm/year)	37.0
Spring water load	97.37%
Spring TP load	97.99%
TP load (tonnes P/year)	17.9
TDP load (tonnes P/year)	16.7
TP export (kg P/ha/year)	0.37
TDP export (kg P/ha/year)	0.34
% of TP as TDP	92.96%

PEMBINA RIVER NORTH OF KILLARNEY

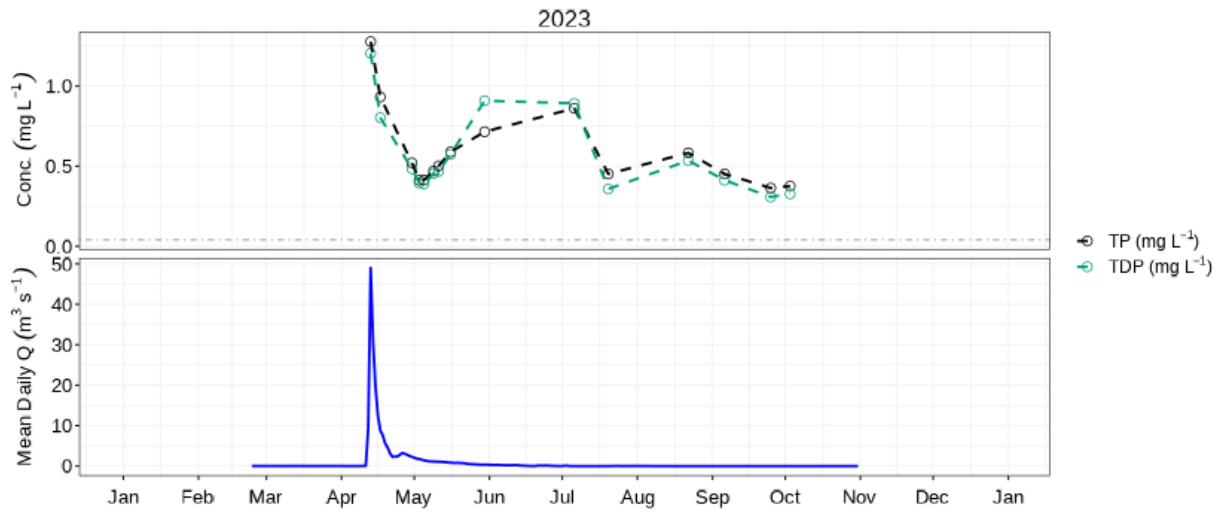


Figure 26: Mean daily discharge (blue) with TP (black) & TDP concentration (green) at Pembina River north of Killarney (05OA001).

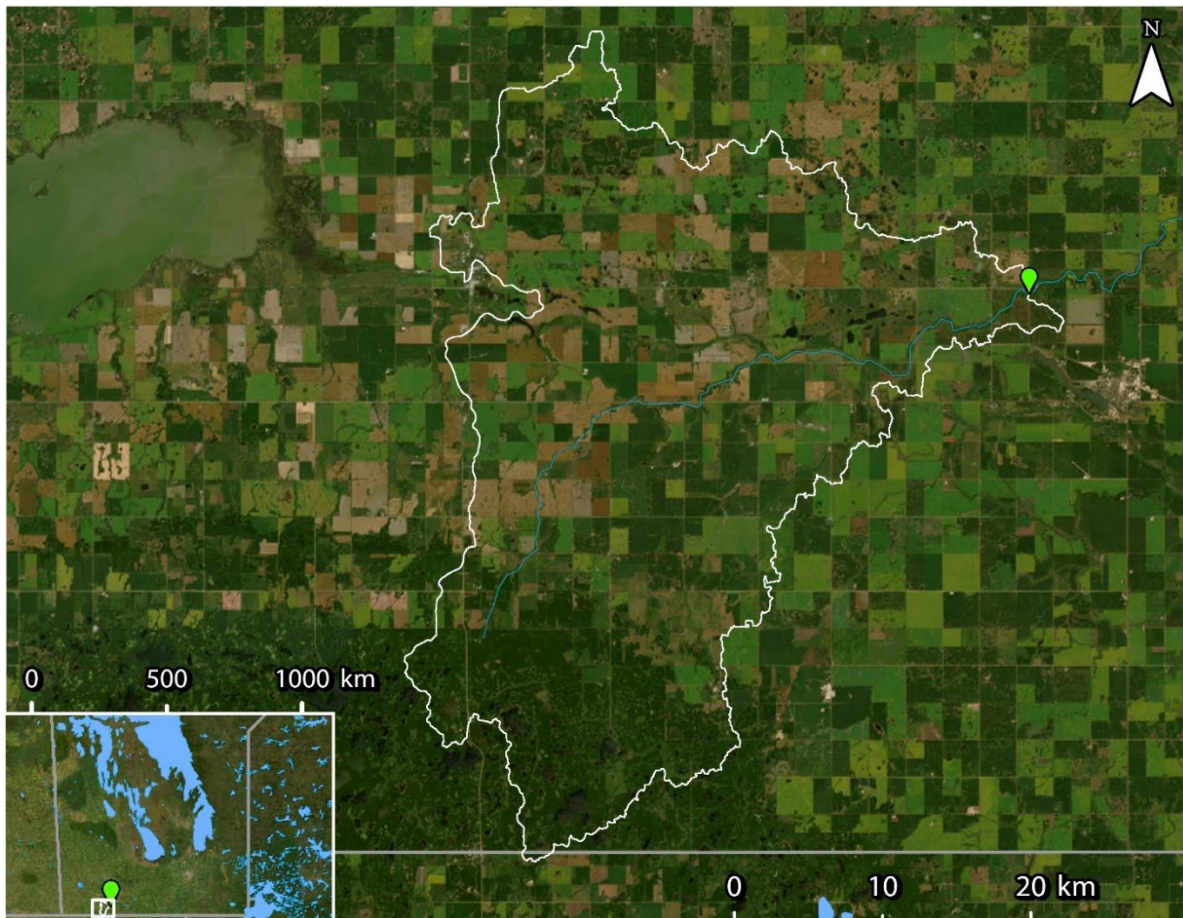


Figure 27: WSC station 05OA001 (green) and drainage area polygon (white - source: WSC). LWCBMN samples directly at the WSC station.

Rivière aux Marais near Christie

The Rivière aux Marais near Christie sampling site drains a primarily agricultural area. The sampling site is located at Water Survey of Canada station 05OC022, near Halbstadt, MB. The sampling effort provided excellent coverage to calculate TP loads and exports.

Table 15: Indices of discharge and phosphorus from the gross drainage area of Rivière aux Marais near Christie (05OC022).

Riviere Aux Marais Near Christie - 2023	
Gross/Incremental	Gross
Drainage area (km²)	187.1
Water load (km³/year)	0.02
Water export (mm/year)	91.9
Spring water load	99.70%
Spring TP load	99.85%
TP load (tonnes P/year)	20.2
TDP load (tonnes P/year)	16.2
TP export (kg P/ha/year)	1.1
TDP export (kg P/ha/year)	0.87
% of TP as TDP	80.36%

RIVIERE AUX MARAIS NEAR CHRISTIE

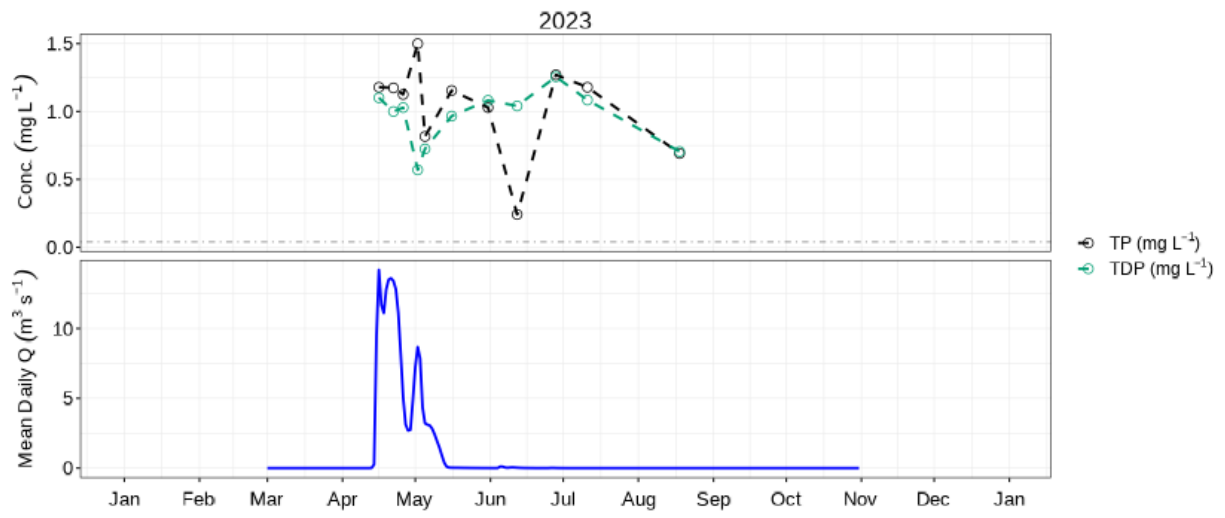


Figure 28: Mean daily discharge (blue) with TP (black) & TDP concentration (green) at Rivière aux Marais near Christie (05OC022).

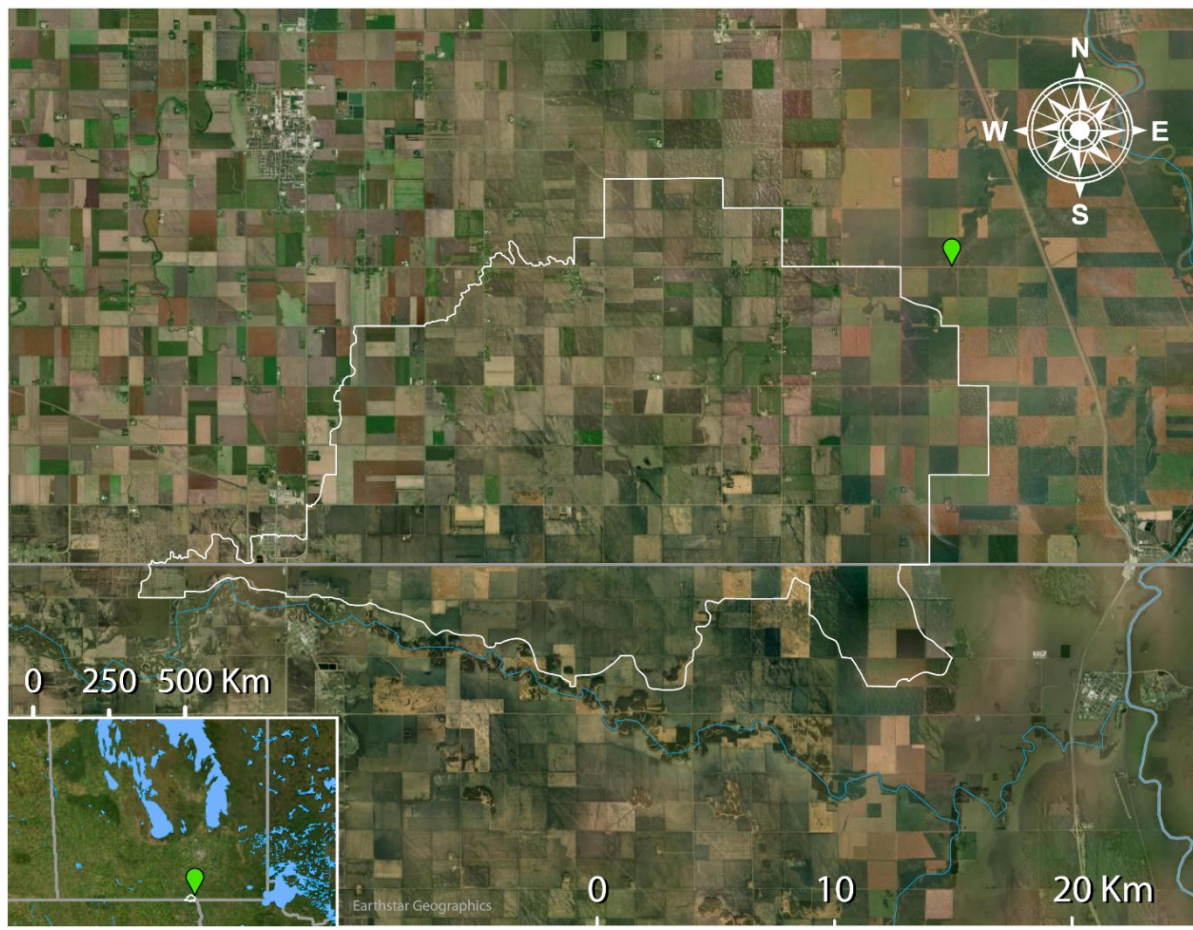


Figure 29: WSC station 05OC022 (green) and drainage area polygon (white – source: AAFC). LWCBMN samples directly at the WSC station.

Snowflake Creek near Snowflake

Snowflake Creek is located south of the Pembina River. The majority of the Snowflake Creek drainage area is located in North Dakota. The drainage area for this sample site drains a largely agricultural area and a portion of the Rural Municipality of Snowflake, Man. This sampling site is located at Water Survey of Canada flow meter 05OB016, near Snowflake. The sampling effort provided excellent coverage to calculate TP loads and exports.

Table 16: Indices of discharge and phosphorus from the gross drainage area of Snowflake Creek near Snowflake (05OB016).

Snowflake Creek Near Snowflake - 2023	
Gross/Incremental	Gross
Drainage area (km ²)	994.3
Water load (km ³ /year)	0.04
Water export (mm/year)	38.1
Spring water load	99.09%
Spring TP load	99.19%
TP load (tonnes P/year)	34.1
TDP load (tonnes P/year)	27.0
TP export (kg P/ha/year)	0.34
TDP export (kg P/ha/year)	0.27
% of TP as TDP	79.15%

SNOWFLAKE CREEK NEAR SNOWFLAKE

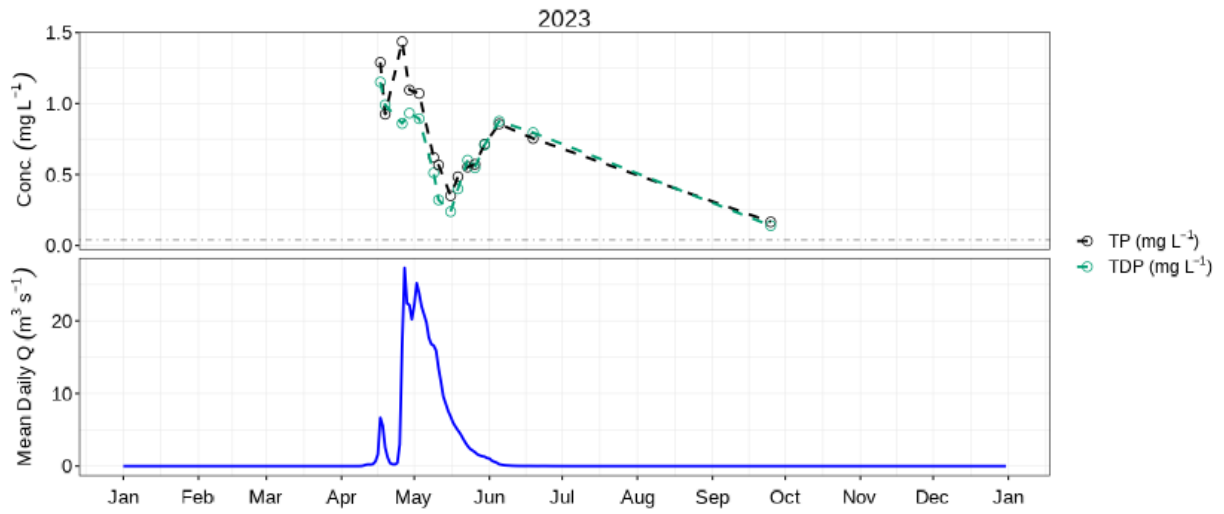


Figure 30: Mean daily discharge (blue) with TP (black) & TDP concentration (green) at Snowflake Creek near Snowflake (05OB016).

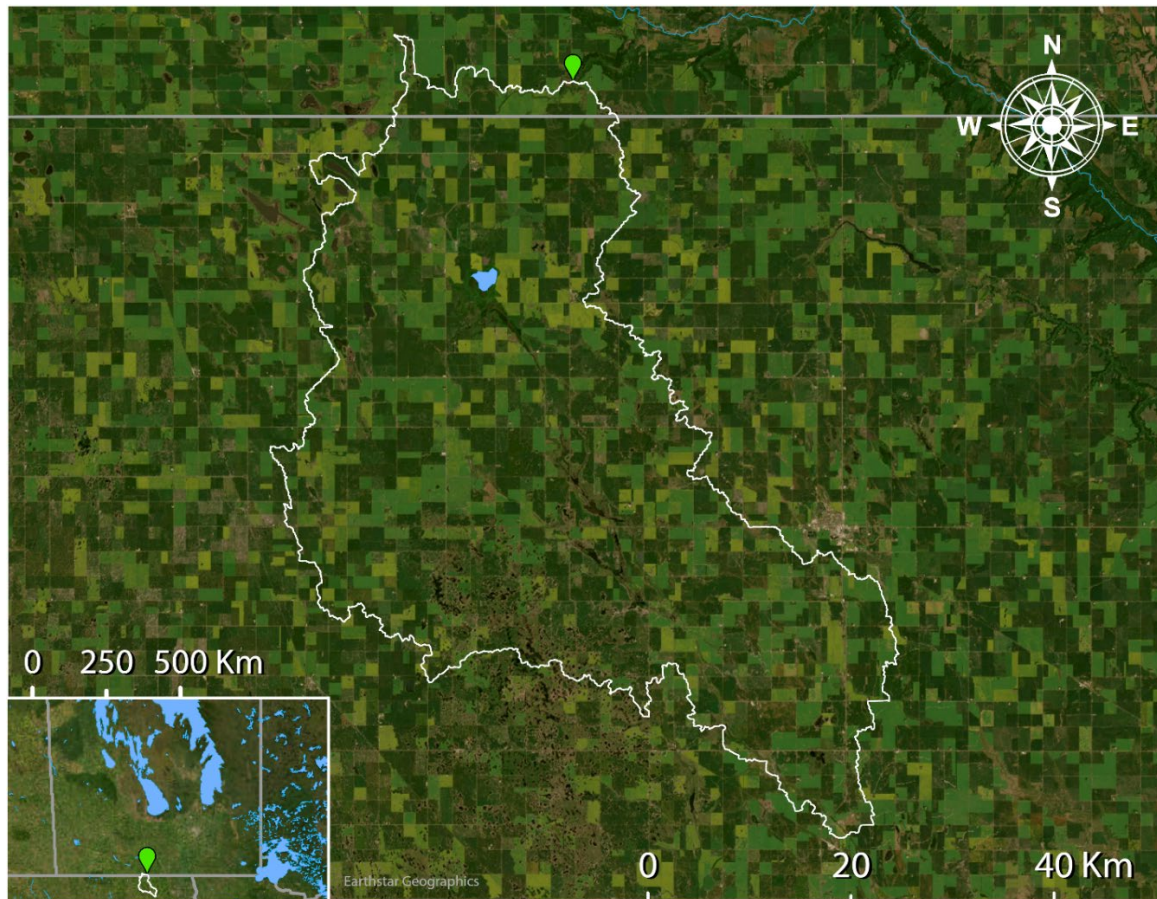


Figure 31: WSC station 05OB016 (green) and drainage area polygon (white - source: WSC). LWCBMN samples directly at the WSC station.

Sites without monitored discharge

Bone Lake Outlet

This sampling site is located just southeast of Bone Lake. This site is located at Water Survey of Canada station 05OA019.

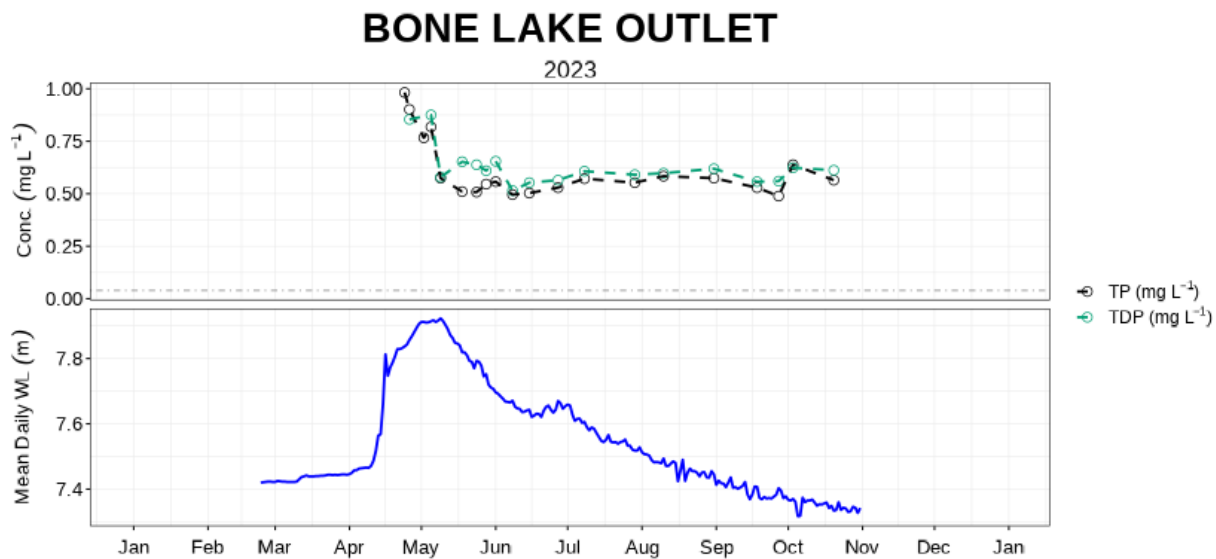


Figure 32: Water depth and phosphorus concentration at Bone Lake Outlet (05OA019).

Downstream Deadhorse Creek

This sampling site is located on Deadhorse Creek, directly upstream of the inlet where the Plum Drain flows into Deadhorse Creek. It receives the effluent from wastewater lagoons in Morden, Winkler and Plum Coulee, MB.

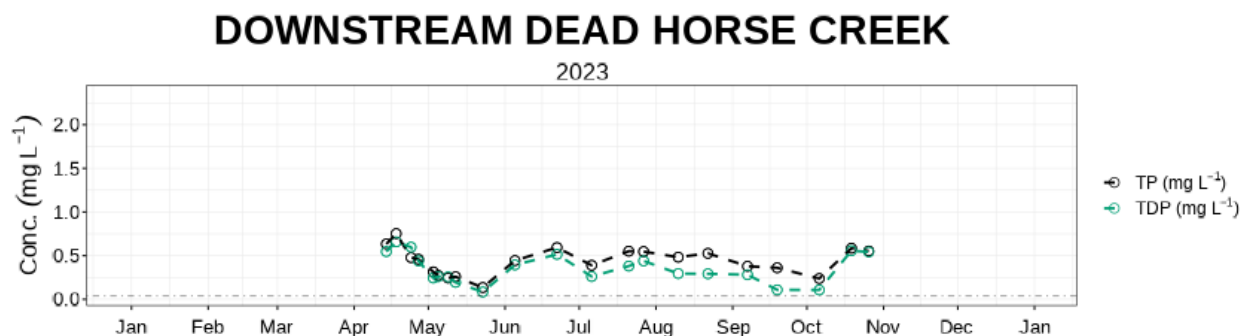


Figure 33: TP (black) & TDP concentration (green) at Downstream Deadhorse Creek.

Downstream Plum Drain

This sampling site is located on the Plum Drain, directly upstream of where it flows into Deadhorse Creek. Unlike the Deadhorse Creek, which runs parallel to the Plum Drain, this sampling site does not receive wastewater effluent from any municipalities.

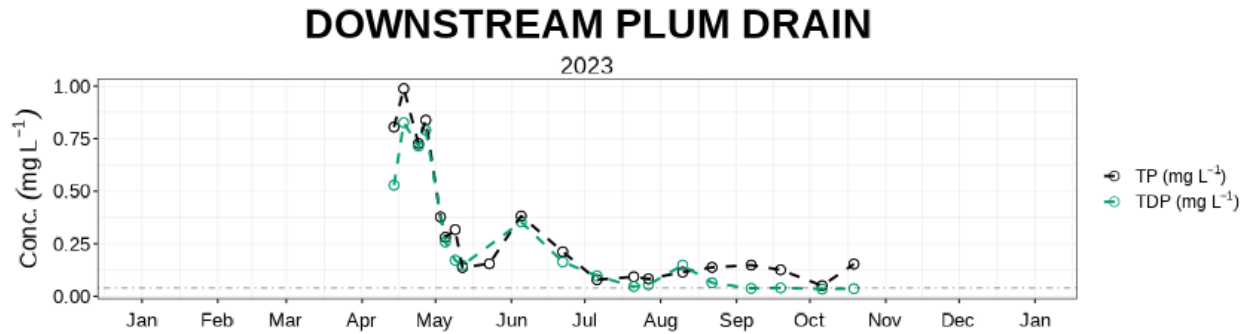


Figure 34: TP (black) & TDP concentration (green) at Downstream Plum Drain.

Upstream Swan Lake

This sampling site is located just upstream of Swan Lake.

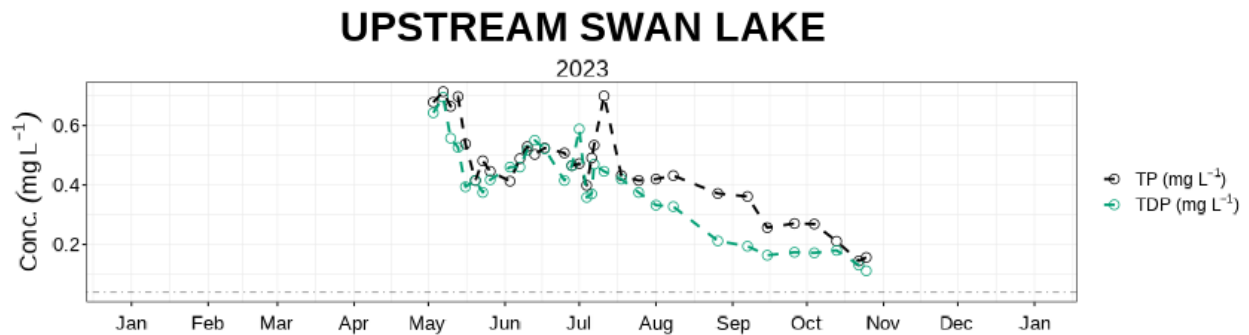


Figure 35: TP (black) & TDP concentration (green) at Upstream Swan Lake

Incremental Calculations

Pembina River above Lorne Lake

Supplemental Table 1: Indices of discharge and phosphorus from the combined gross drainage area and stream discharge of Pembina River below Crystal Creek (05OA010).

Pembina River Above Lorne Lake - 2023	
Gross drainage area (km ²)	1211.0
Water load (km ³ /year)	0.03
Water export (mm/year)	23.1
TP load (tonnes P/year)	26.5
TP export (kg P/ha/year)	0.22
TDP load (tonnes P/year)	24.1
TDP export (kg P/ha/year)	0.20



Supplemental Figure 1: Incremental drainage area in white and upstream drainage areas in yellow. Incremental loads are calculated by subtracting gross “Pembina River north of Killarney” from “Pembina River above Lorne Lake” values.

Pembina River below Crystal Creek

Supplemental Table 2: Indices of discharge and phosphorus from the combined gross drainage area and stream discharge of Pembina River below Crystal Creek (05OB023).

Pembina River Below Crystal Creek - 2023	
Gross drainage area (km ²)	4726.7
Water load (km ³ /year)	0.19
Water export (mm/year)	39.7
TP load (tonnes P/year)	133.5
TP export (kg P/ha/year)	0.28
TDP load (tonnes P/year)	111.6
TDP export (kg P/ha/year)	0.24




Supplemental Figure 2: Incremental drainage area in white and upstream drainage areas in yellow. Incremental loads are calculated by subtracting gross “Cypress Creek near Clearwater”, and “Badger Creek near Cartwright”, and “Pembina River above Lorne Lake” values from gross “Pembina River below Crystal Creek” values.

Pembina River downstream of Swan Lake Outlet

Supplemental Table 3: Indices of discharge and phosphorus from the gross drainage area of Pembina River downstream of Swan Lake Outlet (05OB019).

Pembina River Downstream Of Swan Lake Outlet - 2023	
Gross drainage area (km ²)	5154.4
Water load (km ³ /year)	0.19
Water export (mm/year)	36.9
TP load (tonnes P/year)	113.4
TP export (kg P/ha/year)	0.22
TDP load (tonnes P/year)	102.9
TDP export (kg P/ha/year)	0.20

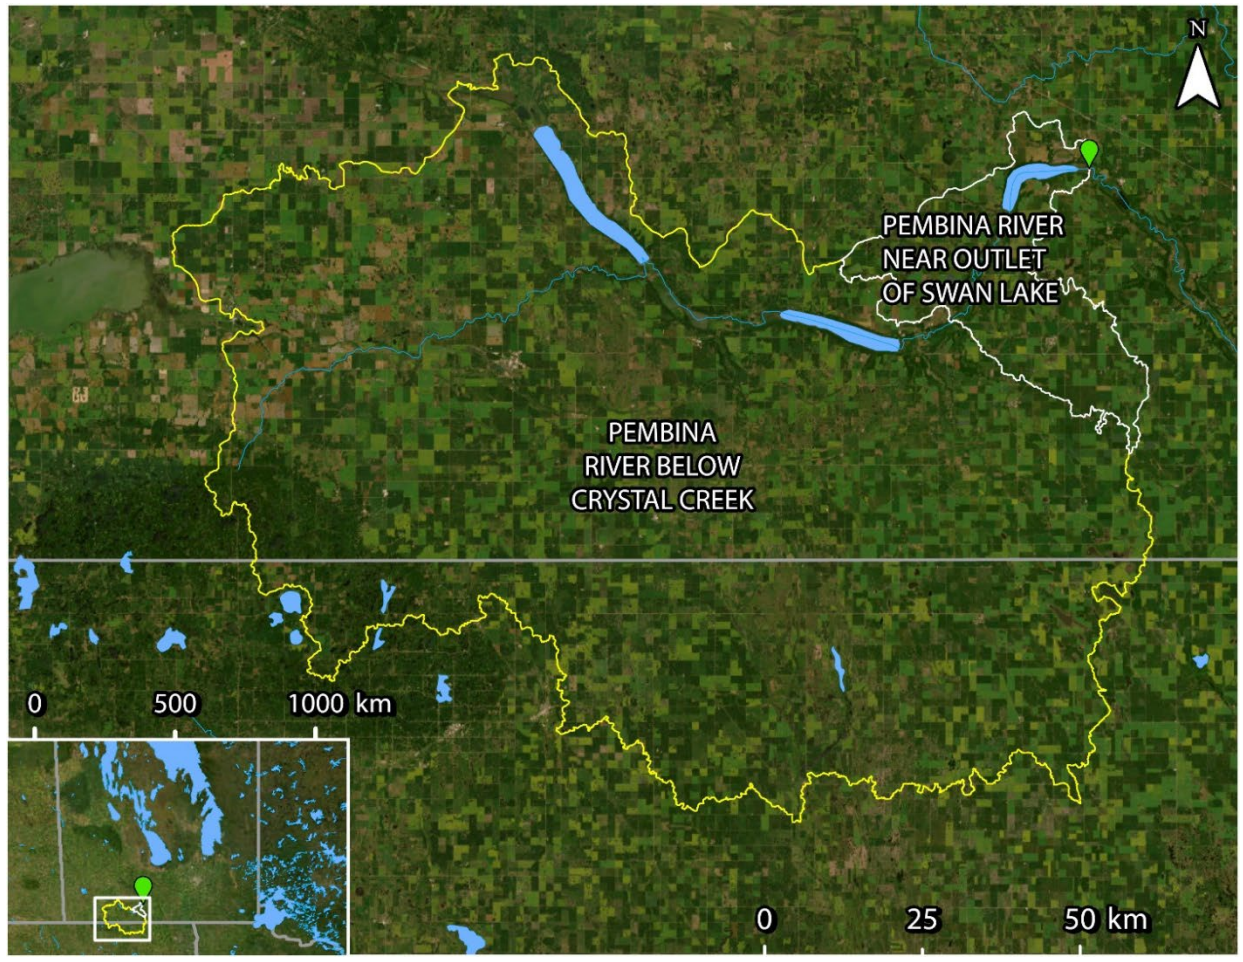

Supplemental Figure 3: Incremental drainage area in white and upstream drainage area in yellow. Incremental loads are calculated by subtracting gross “Pembina River below Crystal Creek” values from gross “Pembina River downstream of Swan Lake Outlet” values.

Pembina River near La Rivière

Supplemental Table 4: Indices of discharge and phosphorus from the gross drainage area of Pembina River near La Rivière (05OB001).

Pembina River Near La Riviere - 2023	
Gross drainage area (km ²)	5574.7
Water load (km ³ /year)	0.22
Water export (mm/year)	38.8
TP load (tonnes P/year)	149.6
TP export (kg P/ha/year)	0.27
TDP load (tonnes P/year)	138.4
TDP export (kg P/ha/year)	0.25




Supplemental Figure 4: Incremental drainage area in white and upstream drainage area in yellow. Incremental loads are calculated by subtracting gross “Pembina River near outlet of Swan Lake” values from gross “Pembina River near La Rivière” values.

Pembina River near Windygates

Supplemental Table 5: Indices of discharge and phosphorus from the gross drainage area of Pembina River near Windygates (05OB007).

Pembina River Near Windygates - 2023	
Gross drainage area (km ²)	7791.8
Water load (km ³ /year)	0.32
Water export (mm/year)	41.2
TP load (tonnes P/year)	264.9
TP export (kg P/ha/year)	0.34
TDP load (tonnes P/year)	181.8
TDP export (kg P/ha/year)	0.23

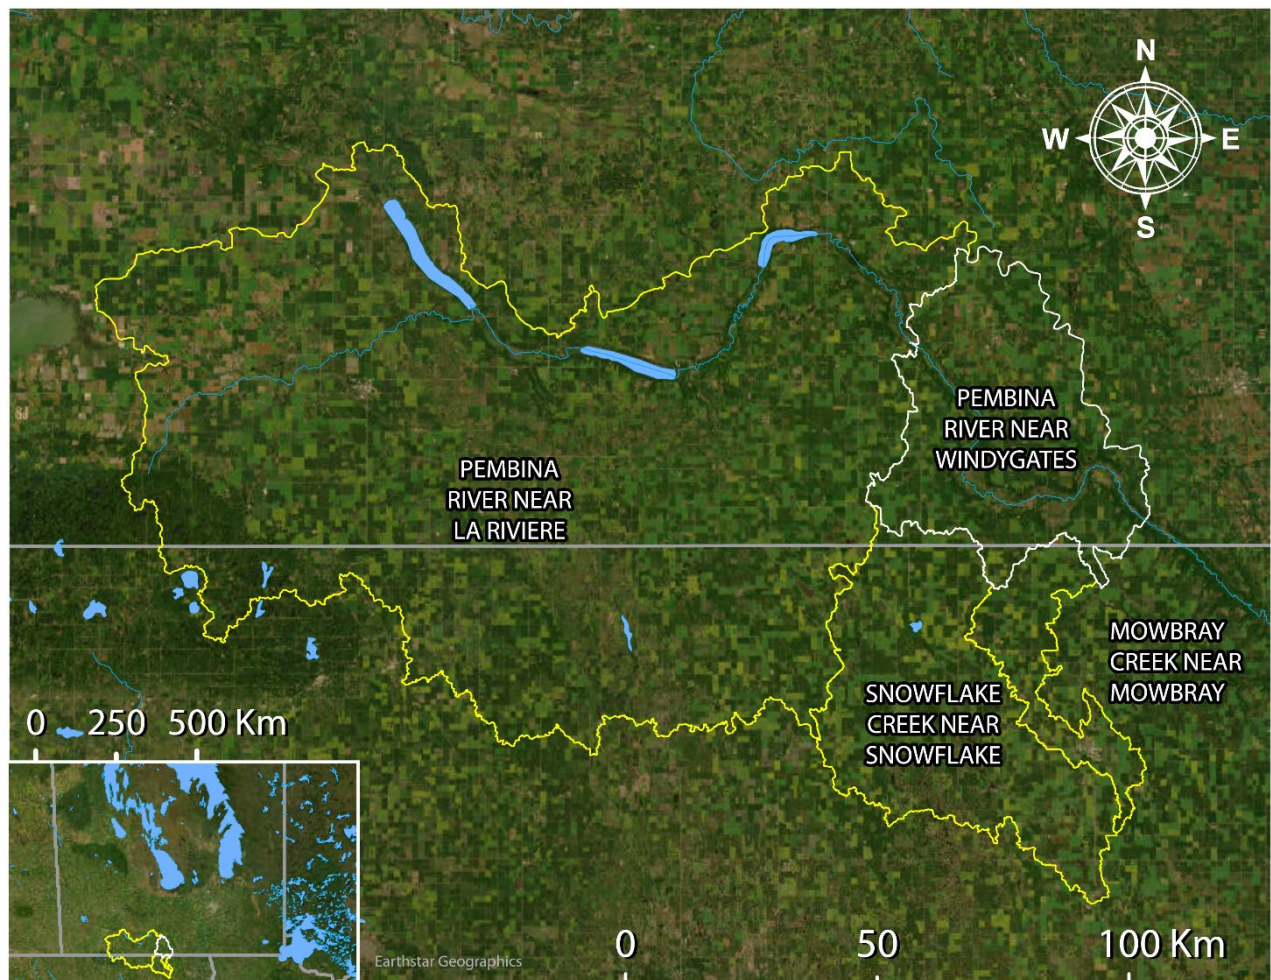

Supplemental Figure 5: Incremental drainage area in white and upstream drainage area in yellow. Incremental loads are calculated by subtracting gross "" values from gross "Pembina River near Windygates" values.

Map Sources

Drainage area polygons

Primarily, and whenever possible, drainage area polygons were taken from the Water Survey of Canada's (WSC) National Hydrometric Network Basin Polygons. Released in 2024, this dataset contains drainage area polygons for over 98% of the active and discontinued WSC stations. We have updated the maps and the drainage area information from the previously released version (in 2022) to this dataset (note: most polygons have either barely changed or not changed at all).

Link:

<https://collaboration.cmc.ec.gc.ca/cmc/hydrometrics/www/HydrometricNetworkBasinPolygons/>

Secondarily, when no WSC drainage area polygons were available, or when it was necessary to enable accurate incremental calculations, we used drainage area polygons from the Total Gross Drainage Areas of the Agriculture and Agri-Food Canada (AAFC)'s Watersheds Project – 2013

Link: <https://open.canada.ca/data/en/dataset/67c8352d-d362-43dc-9255-21e2b0cf466c>

Due to the required use of drainage area polygons from two different datasets, some polygons may slightly overlap. Hotspot maps, as a result, have a few instances where a drainage area is visually cut off. However, most of these instances are very minor, and we display all watersheds in their full extent on each sampling site's individual section.

Map layers

Satellite imagery used in all maps is from the World Imagery map layer (Source: Esri, Maxar, Earthstar Geographics, and the GIS User Community). World Imagery provides one meter or better satellite and aerial imagery in many parts of the world and lower resolution satellite imagery worldwide.

Lake and river map data used in all maps is from North America Environmental Atlas (Lakes, Rivers). The North American Environmental Atlas – Lakes & Rivers datasets display area hydrographic features (Lakes: major lakes and reservoirs; Rivers: major rivers, streams, and canals) of North America at a reference spatial scale of 1:1,000,000. Credits: Commission for Environmental Cooperation (CEC). 2023. "North American Atlas – Lakes and Rivers". Natural Resources Canada (NRCAN), Instituto Nacional de Estadística y Geografía (INEGI), Comisión Nacional del Agua (CONAGUA), U.S. Geological Survey (USGS). Ed. 3.0, Vector digital data [1:1,000,000].

The **Lake Winnipeg Community-Based Monitoring Network** (LWCBMN) is a collaborative, long-term phosphorus monitoring program designed to identify localized phosphorus hotspots where action is required to improve Lake Winnipeg water quality. LWCBMN mobilizes citizen volunteers and watershed partners to collect water samples across Manitoba, generating robust water-quality data that is useful to community practitioners, academic researchers, government scientists and policy-makers alike. Focusing research, resources and action in phosphorus hotspots is necessary to reduce phosphorus loading to Lake Winnipeg.

LWCBMN is delivered in partnership with Manitoba's watershed districts, LWF's science advisors, volunteer citizen scientists and Dr. Nora Casson's laboratory at the University of Winnipeg. Thank you to all who make this network possible!

The **Lake Winnipeg Foundation** (LWF) advocates for change and coordinates action to improve the health of Lake Winnipeg. Combining the commitment of our grassroots membership and the expertise of our science advisors, LWF is nationally recognized for our unique capacity to link science and action. Our goal is to ensure policy and practices informed by evidence are implemented and enforced.

LWF proudly acknowledges the following funders

This project was undertaken with the financial support of
Ce projet a été réalisé avec l'appui financier de



Canada
Water Agency

Agence de l'eau
du Canada



Foundation



TD Friends of the
Environment Foundation

Lake Winnipeg Foundation    

107 - 62 Hargrave St, Winnipeg, MB, R3C 1N1
Treaty 1 Territory & Homeland of the Métis Nation
info@lakewinnipegfoundation.org | 204-956-0436