

LWF

LAKE
WINNIPEG
FOUNDATION



Deadhorse Creek, Photo: Paula Kent

SOURIS RIVER
WATERSHED DISTRICT

2021 regional report

LAKE WINNIPEG
community-based monitoring network



Table of Contents

Lake Winnipeg Community-Based Monitoring Network: Overview	1
Sample Collection & Site Map.....	2
Laboratory & Data Analysis.....	3
LWCBMN By the Numbers - 2021	5
Souris River Watershed District	6
Characteristics of the 2021 Field Season.....	6
Manitoba Watershed District Map	7
2021 Results – Souris River Summary.....	8
2021 Results – Hotspot Map.....	9
2021 Results – Individual Sites.....	10
Antler River near Melita	10
Souris River at Melita	12
Medora Creek near Napinka.....	14
Pipestone Creek near Pipestone.....	16
Plum Creek near Souris.....	18
Sites without capacity for load/export calculation	20
Souris River at Souris	20
Souris River near Minot	21
Whitewater Lake near Boissevain	22
Turtlehead Creek at Deloraine Reservoir.....	23
Gainsborough Creek near Lyleton.....	24
Incremental Calculations.....	26
Souris River at Melita	26
Plum Creek near Souris.....	27
Map Sources.....	28
Drainage area polygons	28
Map layers	28

\Lake Winnipeg Community-Based Monitoring Network: Overview

The Lake Winnipeg Community-Based Monitoring Network (LWCBMN), coordinated by the Lake Winnipeg Foundation (LWF), mobilizes citizens and watershed partners to collect water samples across Manitoba in order to measure phosphorus concentration. Phosphorus is the nutrient responsible for blue-green algae blooms on Lake Winnipeg. Phosphorus comes from diverse sources across the watershed, including municipal wastewater and agricultural runoff.

Different sub-watersheds contribute different proportions of Lake Winnipeg’s total phosphorus load. With the help of a strong network of watershed partners and citizen scientists, this long-term monitoring program is identifying phosphorus hotspots – localized areas that contribute higher amounts of phosphorus to waterways than other areas. Targeting actions to reduce phosphorus loading in hotspots will reduce the amount of phosphorus entering Manitoba’s lakes and rivers, and improve the health of Lake Winnipeg.

Snow melts, floods and heavy rainfall events are responsible for most of the phosphorus that is flushed from the land and carried into our waterways. LWCBMN samples frequently throughout the season, and particularly during the spring melt, to ensure we capture phosphorus runoff during these high-water events.

Most LWCBMN sampling is conducted at stations where water flow is continuously monitored by the [Water Survey of Canada](#) (WSC). By tracking flow online using the WSC’s real-time data, the network can notify partners and citizen scientists across the watershed to ensure frequent sampling during peak flows.

Sites with flow data can be coupled with LWCBMN data to calculate **phosphorus loads**. We need several samples throughout the season, corresponding to changes in flow, to accurately calculate these loads. Phosphorus loads can subsequently be used to calculate **phosphorus export**, based on the area of the watershed.

Phosphorus load is the total amount of phosphorus flowing past a sample site over a given period of time, expressed as tonnes per year.

Phosphorus export is the amount of phosphorus exported by each hectare of land in a year, expressed as kg/ha/y.

Sample Collection & Site Map

Water samples are collected using a weighted sampling device that collects source water directly into a 500 mL Nalgene polyethylene bottle. The sampling device is lowered into the water just before it hits the bottom, the bottle is filled, then brought back to the surface. It is rinsed three times prior to sample collection. Next, a 60 mL Nalgene polyethylene bottle containing 1 mL 4N H₂SO₄ is filled with whole water from the collection bottle.

In 2021, 919 unfiltered water samples were collected and analyzed from 93 sites. Of these 93 LWCBMN sampling sites, 73 are located near flow-metered WSC stations, four are located near non-flow-metered WSC stations, one is located near a USGS station, and fifteen are not located near any stations.

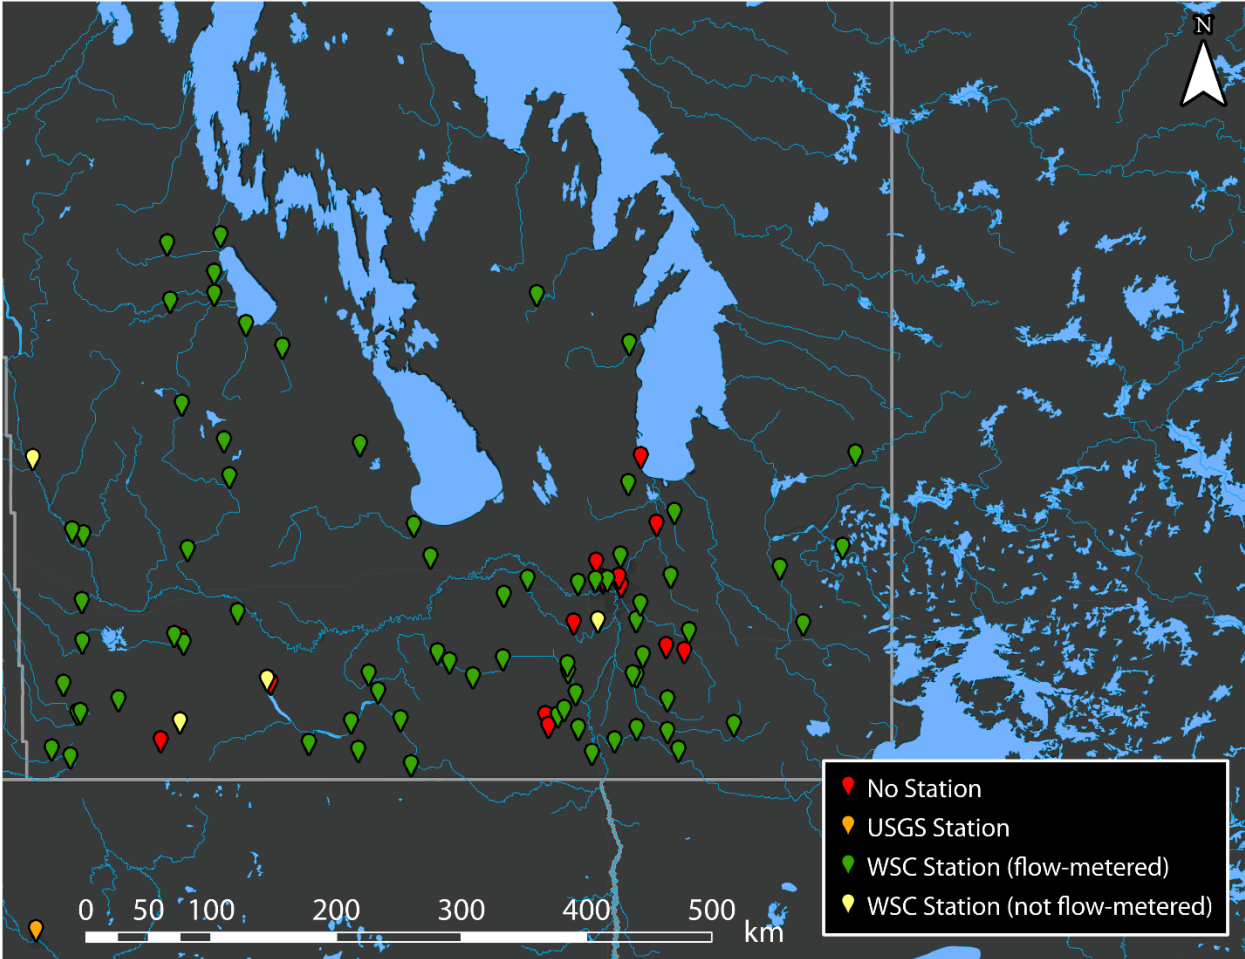


Figure 1: Map of LWCBMN sampling sites in 2021. Locations shown provided at least one sample. Colours indicate nearby station type.

Laboratory & Data Analysis

LWCBMN water samples are analysed for total phosphorus concentration. The analysis of a sample for total phosphorus (TP) is a two-step procedure involving first the chemical digestion/conversion of all P forms to orthophosphate (PO_4^{3-}) followed by the analysis of the concentration of PO_4^{3-} . The digestion procedure is patterned after USGS [Water-Resources Investigations Report 03-4174](#). The concentration of PO_4^{3-} in the sample was determined following [Murphy & Riley \(1962\)](#). The result of this analytical method is determination of unfiltered total phosphorus in mg/L.

Laboratory analysis on LWCBMN water samples was conducted in partnership with Dr. Nora Casson at her laboratory at the University of Winnipeg. Quality assurance of laboratory methods for the determination of total phosphorus was completed on samples sent from [Proficiency Testing Canada](#). Proficiency testing allows us to assess the quality of our results as compared to the results of other laboratories across the country. We received excellent passing grades of 92/100 in November 2023 and 94/100 in May 2024, further highlighting the consistency and accuracy of our laboratory methods.

Our laboratory results provide a record of the phosphorus concentrations for every day that water samples were collected, but we are equally interested in reporting the actual load of phosphorus each year in each watershed that we sample. To create this record, we multiply concentrations by the volume of water that flowed past the station every day, using flow data from Water Survey of Canada (WSC) stations.

WSC's real-time flow data subsequently undergoes additional quality assurance and quality control processes and is later published as historical flow data. Historical data is released by WSC as the official version of the data, with additional notes about unique site characteristics or considerations affecting data quality (e.g., the COVID-19 pandemic reduced field visits in 2020). Our 2020 data analysis used historical flow data.

For each station, gaps between concentration observations are filled by linear interpolation to create a continuous daily record. For the WSC flow record before or after the first or last water sample collected, we estimate the missing daily mean concentrations to be equal to the first or last measured concentration, respectively. These measured and estimated daily concentrations are then multiplied by daily flow to create a record of daily phosphorus loads.

Larger watersheds generate greater river flow and typically larger phosphorus loads. Comparing the intensity of phosphorus sources, especially among watersheds of varying sizes, is possible through the calculation of average load exported from each unit area of the watershed. Hence, we also report phosphorus export, which is simply the annual load divided by the watershed area that contributed to this load.

The export per unit area is indicative of the relative intensity of the sources generating phosphorus export, even among watersheds of different sizes. This is why we display maps of phosphorus export (and not load) in this report. Hotspots identified in these reports export several times more phosphorus per hectare than non-hotspot watersheds. Identifying hotspots can help government agencies to focus phosphorus reduction programs efficiently throughout the province.

LWCBMN By the Numbers - 2021

Table 1: Summary of 2021 LWCBMN sampling activity by region.

Region	Number of sites	Number of samples	Site with highest regional total phosphorus (TP) export (kg/ha/y)	Mean % of spring* water load	Mean % of spring* TP load
Assiniboine West	8	89	Little Saskatchewan River near Minnedosa - 0.037	40.81	42.41
Central Assiniboine	2	29	Cypress River near Bruxelles - 0.020	47.43	27.94
City of Winnipeg	6	35	Omand's Creek near Empress Street - 0.017	67.14	60.82
East Interlake	5	46	Grassmere Creek Drain near Middlechurch - 0.0073	77.41	79.81
Inter-Mountain	7	95	Ochre River near Ochre River - 0.062	47.06	37.13
Northeast Red	1	12	Devils Creek near Libau - 0.027	85.59	90.23
Pembina Valley	12	111	Kronsgart Drain near Sewell - 0.055	43.30	39.49
Redboine	11	150	La Salle River at Elie - 0.035	58.92	62.39
Souris	10	62	Pipestone Creek near Pipestone - 0.0046	43.07	40.61
Seine Rat Roseau	14	179	Manning Canal near Île-des-Chênes- 0.063	64.33	64.51
Whitemud	3	37	Whitemud River near Westbourne - 0.0072	66.49	58.92
Winnipeg River	4	66	Whiteshell River at outlet of Jessica Lake - 0.026	38.71	39.89

*LWCBMN defines "Spring" as March 1 to May 31, inclusive.

Raw data (phosphorus concentration and water flow) from LWCBMN's 2020 field season is available online at LakeWinnipegDataStream.ca, an open access hub for sharing water data.

Souris River Watershed District

The Souris River Watershed District (SRWD) is located in south-western Manitoba, and is bordered by Saskatchewan to the west, the United States to the south. A major sub-watershed in SRWD is Plum Creek, which drains Oak Lake, a popular cottage destination that has been experiencing an increase in algae blooms in recent years. In 2020, SRWD expanded to include the eastern portion of the Souris River watershed.

The primary land use in SRWD is agriculture, specifically cropland and grazing land, as well as oil extraction in the north-east portion of the district (West Souris River Integrated Water Management Plan, 2012). In addition to agricultural activities, wastewater treatment plants and lagoons in municipalities throughout SRWD contribute phosphorus to local waterways. Major municipalities include Pipestone, Sifton, Two Borders and Glenwood-Souris.

In partnership with LWCBMN, SRWD staff and volunteers sampled 10 sites in the SRWD region, with 6 of those sites being located near actively monitored WSC flow meters. For the site where flow is not measured, useful information can be drawn from the phosphorus concentrations; however, we cannot calculate the phosphorus load because we cannot multiply the concentration by the volume of water flowing by the site.

[SRWD Website \(srwd.ca\)](http://srwd.ca)

[SRWD Watershed Plans \(srwd.ca/watershed-management\)](http://srwd.ca/watershed-management)

Characteristics of the 2021 Field Season

2021 was a very dry year in southern Manitoba¹. As well, from March to May 2021, a historically important season for phosphorus export, most of southern Manitoba experienced severely to extremely dry conditions².

The mean peak discharge data across all LWCBMN sites with analyzed water samples was June 27, 2021 (with a standard deviation of 70.40 days). In 2021, an average of 54.60% of stream discharge occurred in spring (March 1 - May 31) across LWCBMN sites (with a standard deviation of 24.53%).

As a result of the extreme drought in 2021, there are no phosphorus exports above 0.5 (kg / ha / year) in any site in any region monitoring by LWCBMN in 2021^[KF1].

¹ <https://www.gov.mb.ca/sd/pubs/water/drought/2021/drought-conditions-report-october-2021.pdf>

² https://www.gov.mb.ca/sd/pubs/water/drought/2021/drought_conditions_report_may_2021.pdf

Manitoba Watershed District Map

Manitoba’s watershed districts are crucial partners contributing to the success of LWCBMN. In addition to assisting with sample collection, each district brings valuable community connections and a wealth of regional expertise to the network, helping us contextualize and better understand the data.

In 2021, 10 watershed districts participated in LWCBMN activities: Assiniboine West, Central Assiniboine, East Interlake; Inter-Mountain; Northeast Red, Pembina Valley, Redboine, Souris River, Seine Rat Roseau, and Whitemud.

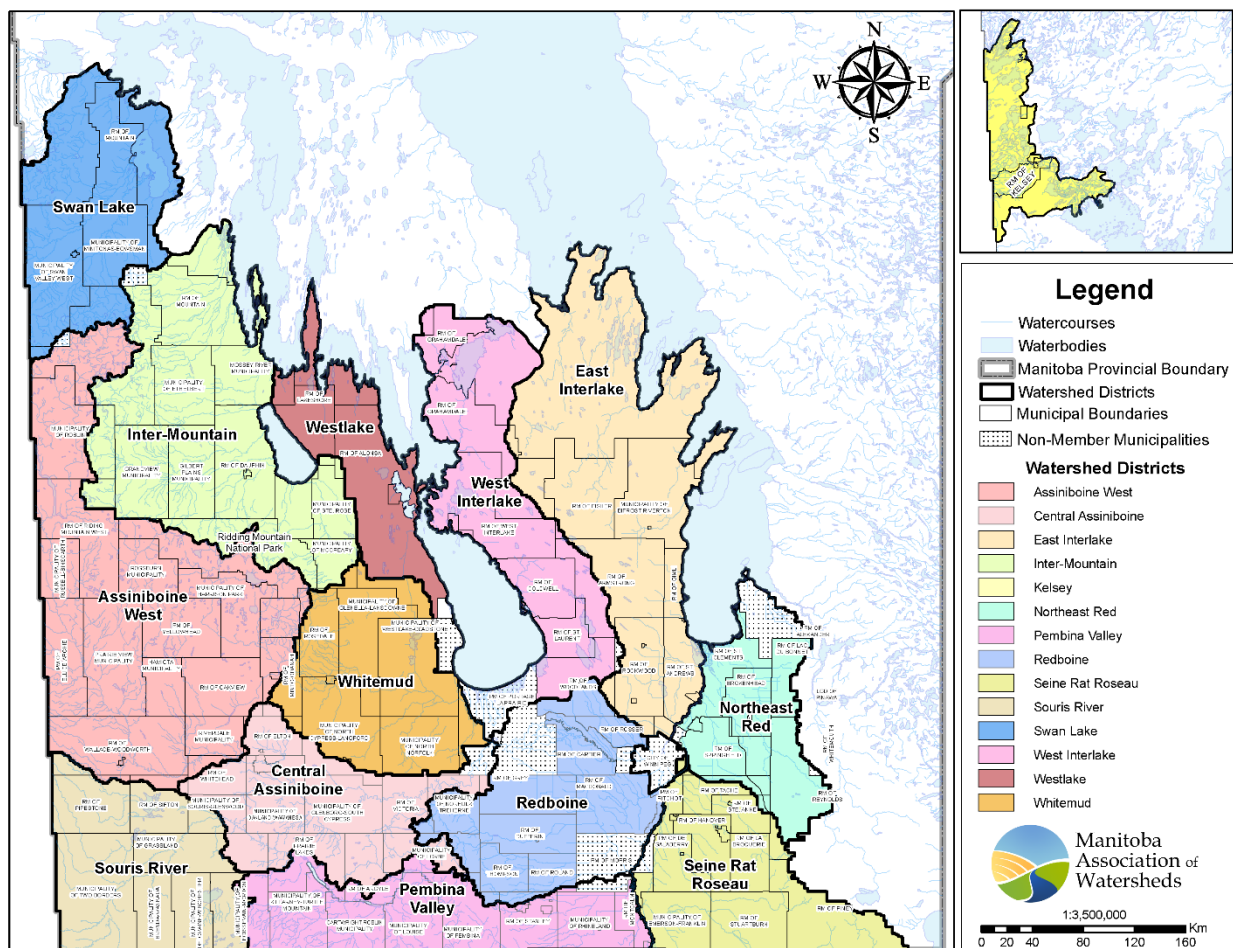


Figure 2: Manitoba Watershed District Boundaries. There are 14 total watershed districts. Map provided by Manitoba Association of Watersheds (updated July 2022).

2021 Results – Souris River Summary

Table 2: Summary of 2021 LWCBMN results in Souris River Watershed District. Letters correspond to drainage areas in Figure 3. Data shown represents sites with sampling efforts adequate enough to calculate loads/exports. ¹See footnote for explanation of acronyms/abbreviations.

	Site Name	WSC Station	GDA (km ²)	IDA (km ²)	Gross/Incr.	TP load (tonnes/y)	TP export (kg/ha/y)
A	Antler River near Melita	05NF002	3218.64	NA	gross	0.10	0.00031
B	Medora Creek near Napinka	05NG020	325.83	NA	gross	0.085	0.0026
C	Pipestone Creek near Pipestone	05NG003	4283.77	NA	gross	1.97	0.0046
D	Plum Creek near Souris	05NG007	5477.63	1211.45	Incr.	-1.94	-0.016
E	Souris River at Melita	05NF001	49511.1	46292.44	Incr.	1.56	0.00034

To compare 2021 results to other years of data, please see LWCBMN regional reports online at <https://lakewinnipegfoundation.org/lwcbmn-regional-reports>

¹ WSC = Water Survey of Canada.
 GDA = gross drainage area (i.e., the total watershed area).
 IDA = incremental drainage area (i.e., the total watershed area minus the total watershed area of any contained upstream sites with data adequate for load/export calculation).
 Gross/Incr. = whether or not the adjacent TP load/export listed is from the gross or incremental (“Incr.”) drainage area of a site.

2021 Results – Hotspot Map

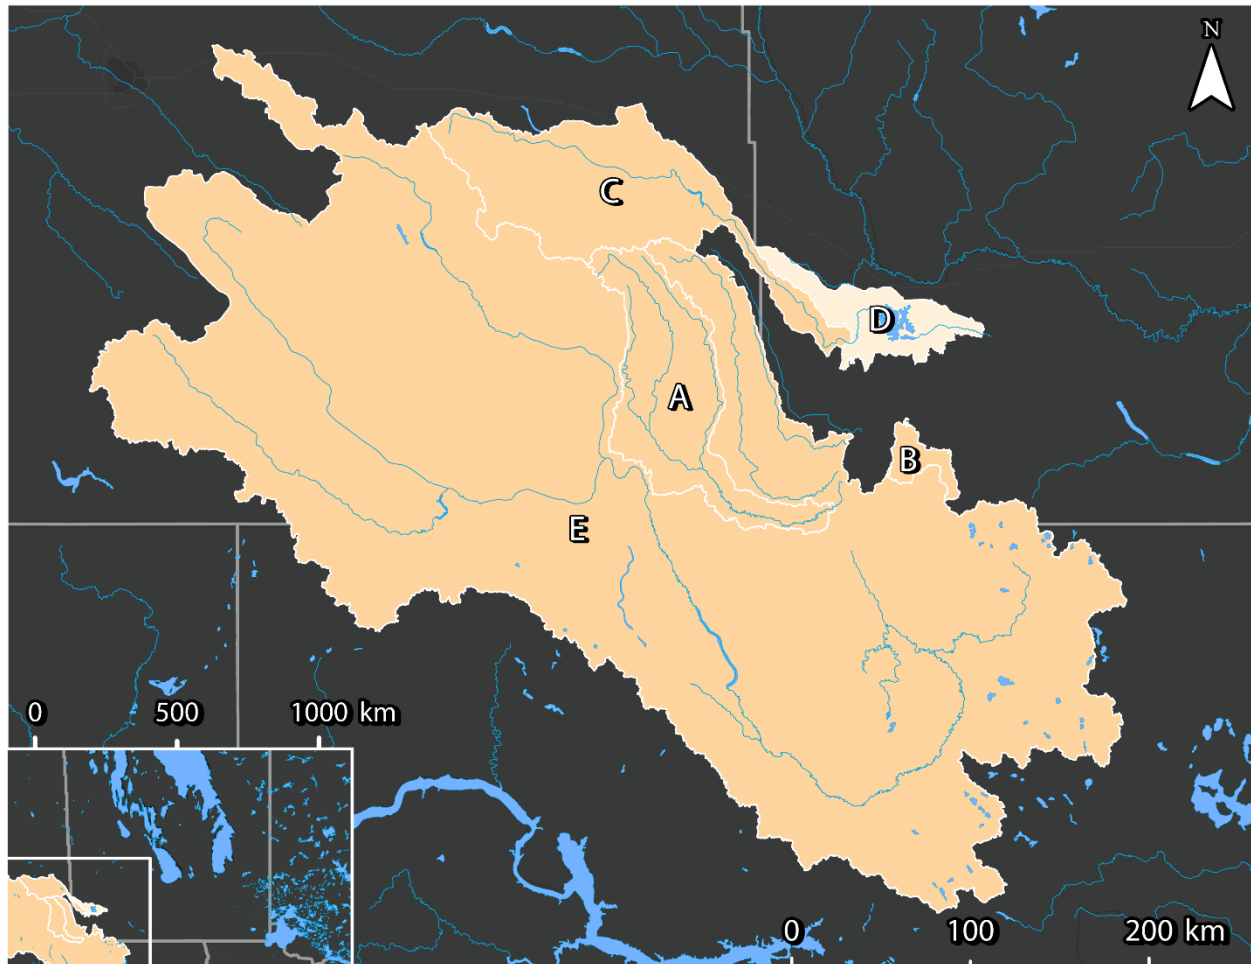


Figure 3: 2021 LWCBMN TP Export Hotspots in Souris River Watershed District. Letters correspond to sites listed in Table 2.

2021 Results – Individual Sites

Antler River near Melita

Antler River is a river situated south of Melita that flows into the Souris River. This sampling site is located at Water Survey of Canada flow meter 05NF002. The sampling effort provided adequate coverage to calculate TP loads and exports.

Table 3: Indices of discharge and phosphorus from the gross drainage area of Antler River near Melita (05NF002) in 2021.

Gross drainage area:	3218.64 km ²
Peak discharge:	0.67 m ³ s ⁻¹ (2021-03-15)
Peak TP concentration:	0.64 mg/L (2021-09-30)
% of water load in spring:	100%
% of TP load in spring:	100%
Water load:	0.00017 km ³ y ⁻¹
TP load:	0.10 tonnes P y ⁻¹
Water export:	0.052 mm y ⁻¹
TP export:	0.00031 kg P ha ⁻¹ y ⁻¹

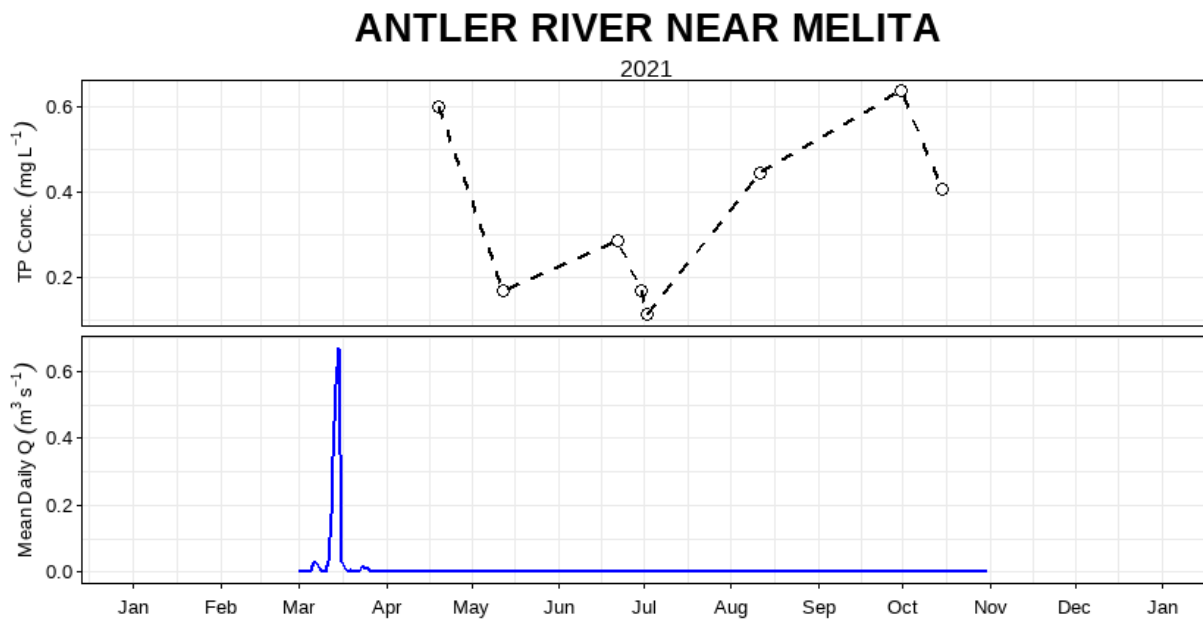


Figure 4: Mean daily discharge (m³ s⁻¹) and total phosphorus concentration (mg L⁻¹) over the 2021 sampling season at Antler River near Melita (05NF002).

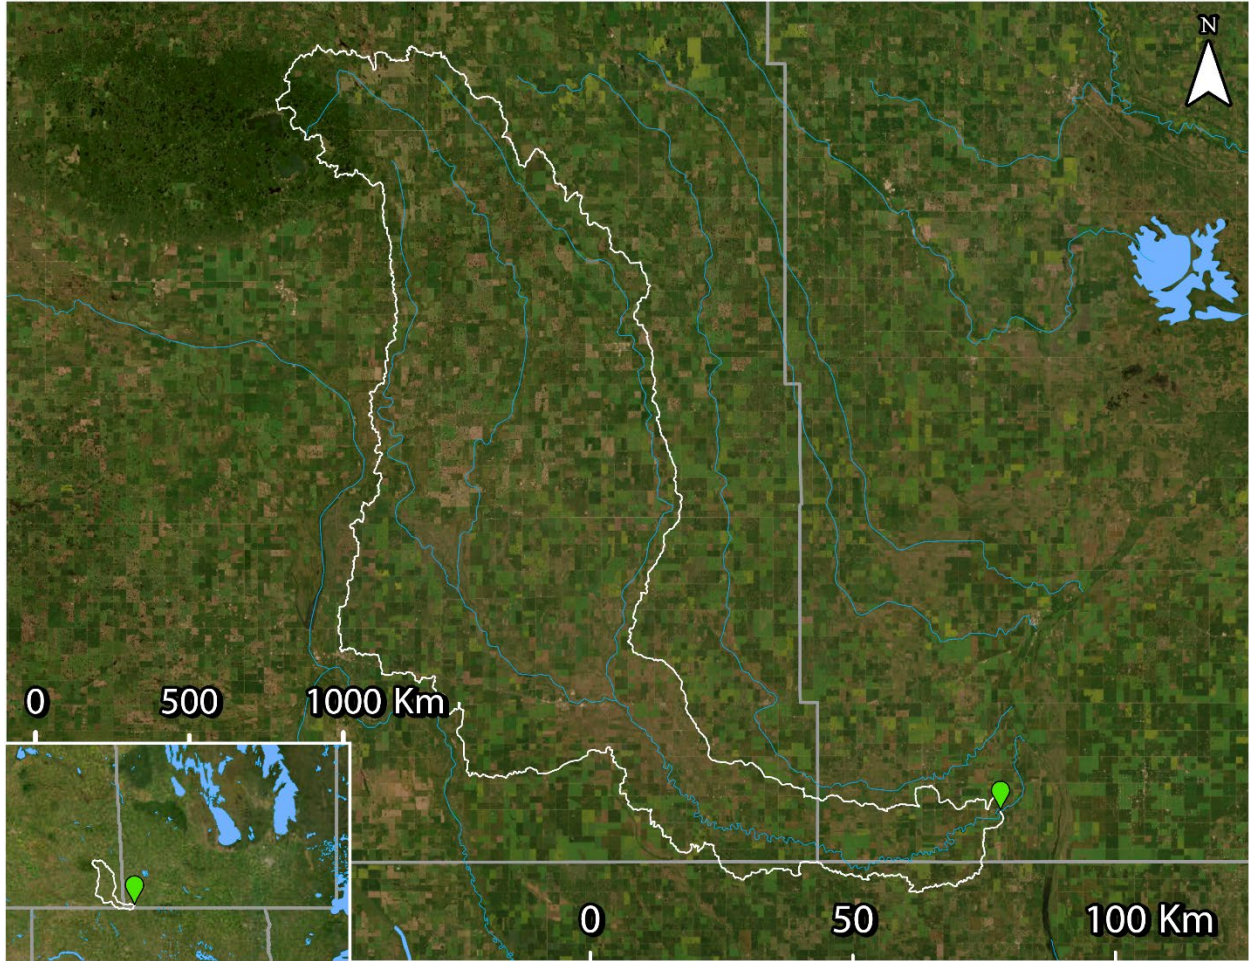


Figure 5: WSC station 05NF002 (green) and drainage area polygon (white - source: WSC). LWCBMN samples directly at the WSC station.

Souris River at Melita

The Souris River originating in Saskatchewan, flows south into North Dakota and back north into Manitoba. It is approximately 700 km in length, and merges with the Assiniboine River at Treesbank. This sampling site is located at Water Survey of Canada station 05NF001, near Melita. The sampling effort provided adequate coverage to calculate TP loads and exports.

Table 4: Indices of discharge and phosphorus from the incremental drainage area of Souris River at Melita (05NF001). See Supplemental Table 1 for gross calculations.

Incremental drainage area:	46292.44 km ²
Peak discharge:	0.90 m ³ s ⁻¹ (2021-10-26)
Peak TP concentration:	0.34 mg/L (2021-08-11)
% of water load in spring:	23.84%
% of TP load in spring:	21.82%
¹Incremental water load:	0.0080 km ³ y ⁻¹
¹Incremental TP load:	1.56 tonnes P y ⁻¹
²Incremental water export:	0.17 mm y ⁻¹
²Incremental TP export:	0.00034 kg P ha ⁻¹ y ⁻¹

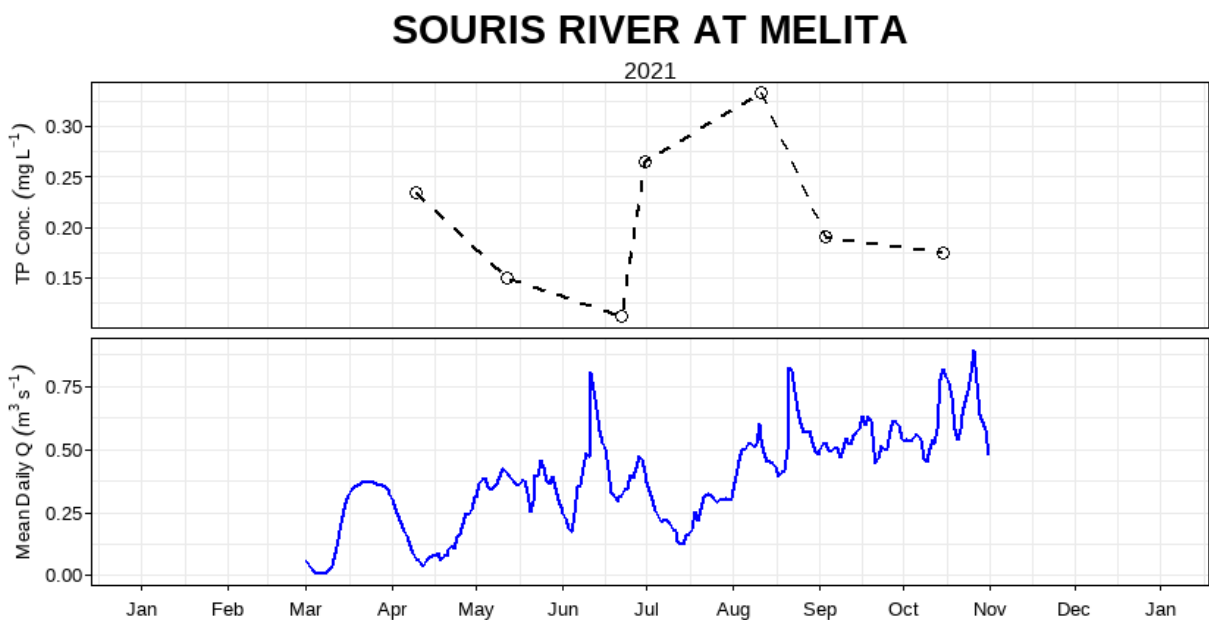


Figure 6: Mean daily discharge (m³ s⁻¹) and total phosphorus concentration (mg L⁻¹) over the 2021 sampling season at Souris River at Melita (05NF001).

¹ Incremental values are calculated by subtracting gross “Antler River near Melita” from “Souris River at Melita” values.

² Incremental exports are calculated by dividing incremental loads by incremental drainage areas.

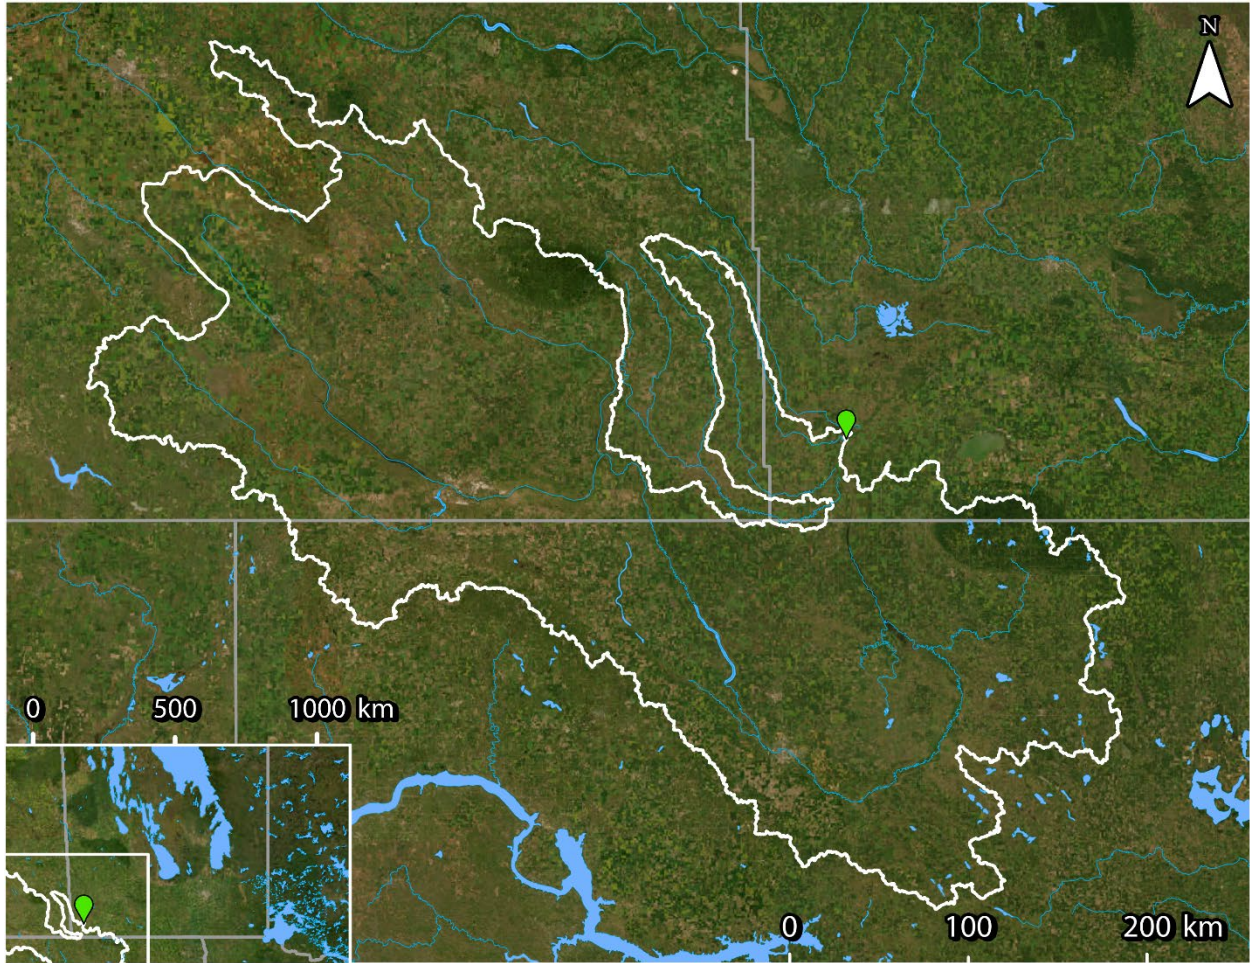


Figure 7: WSC station 05NF001 (green), and incremental drainage area polygon (white - source: WSC). See Supplemental Figure 1 for upstream drainage areas used to calculate incremental area. LWCBMN samples directly at the WSC station.

Medora Creek near Napinka

Medora Creek is located north of Napinka and south of Napinka Lagoon (lake). It flows northwesterly into the Souris River from Turtle Mountain. This sampling site is located at Water Survey of Canada station 05NG020, near Napinka. The sampling effort provided excellent coverage to calculate TP loads and exports.

Table 5: Indices of discharge and phosphorus from the gross drainage area of Medora Creek near Napinka (05NG020) in 2021.

Gross drainage area:	325.83 km ²
Peak discharge:	0.15 m ³ s ⁻¹ (2021-06-20)
Peak TP concentration:	0.95 mg/L (2021-04-19)
% of water load in spring:	0%
% of TP load in spring:	0%
Water load:	0.00010 km ³ y ⁻¹
TP load:	0.085 tonnes P y ⁻¹
Water export:	0.32 mm y ⁻¹
TP export:	0.0026 kg P ha ⁻¹ y ⁻¹

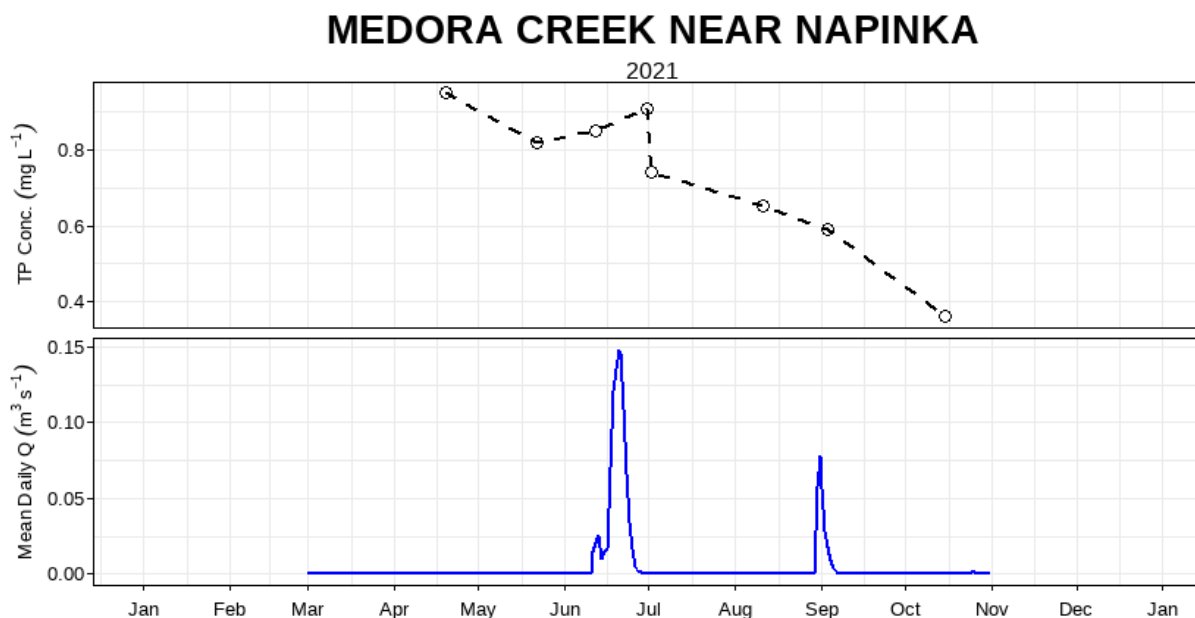


Figure 8: Mean daily discharge (m³ s⁻¹) and total phosphorus concentration (mg L⁻¹) over the 2021 sampling season at Medora Creek near Napinka (05NG020).

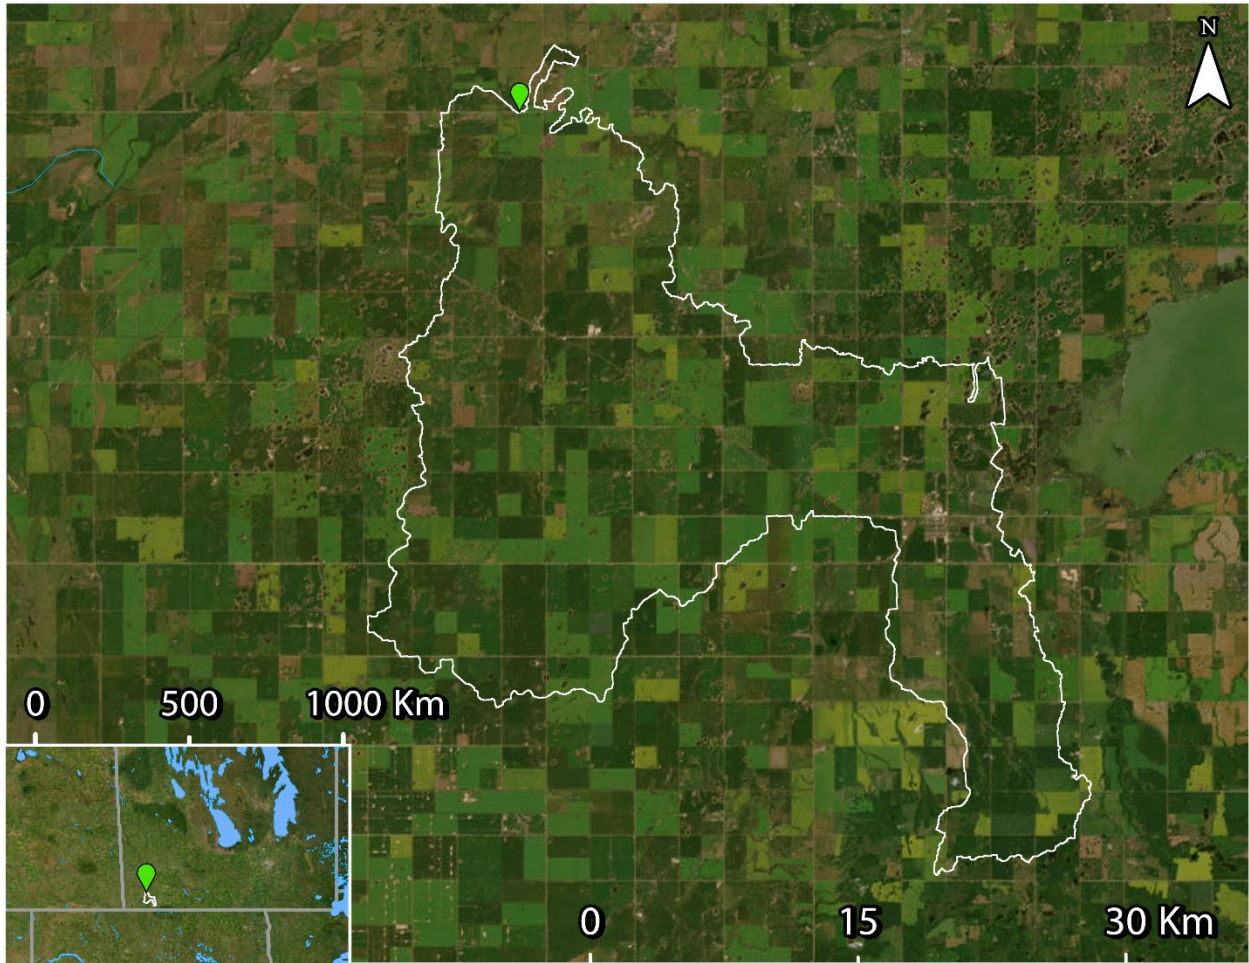


Figure 9: WSC station 05NG020 (green) and drainage area polygon (white – source: WSC). LWCBMN samples directly at the WSC station.

Pipestone Creek near Pipestone

This sample site is located on Pipestone Creek, which flows into Oak Lake. This sampling site is located at Water Survey of Canada flow meter 05NG003, near Pipestone. The sampling effort provided adequate coverage to calculate TP loads and exports.

Table 6: Indices of discharge and phosphorus from the gross drainage area of Pipestone Creek near Pipestone (05NG003) in 2021.

Gross drainage area:	4283.77 km ²
Peak discharge:	2.22 m ³ s ⁻¹ (2021-06-22)
Peak TP concentration:	0.33 mg/L (2021-08-23)
% of water load in spring:	59.47%
% of TP load in spring:	46.99%
Water load:	0.0099 km ³ y ⁻¹
TP load:	1.97 tonnes P y ⁻¹
Water export:	2.30 mm y ⁻¹
TP export:	0.0046 kg P ha ⁻¹ y ⁻¹

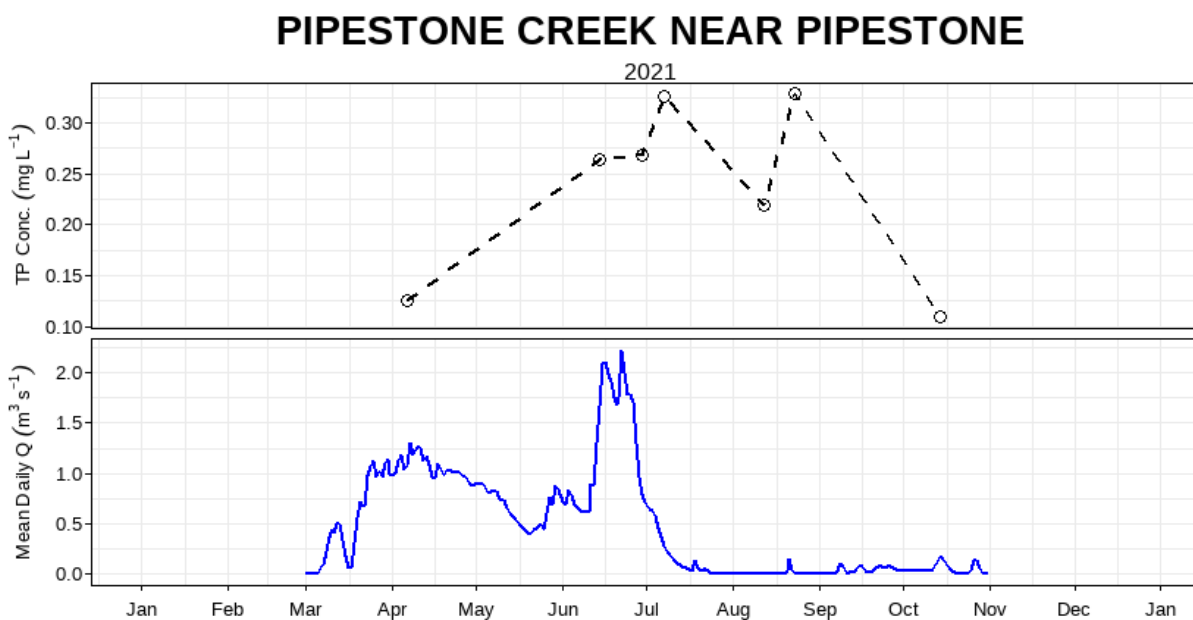


Figure 10: Mean daily discharge (m³ s⁻¹) and total phosphorus concentration (mg L⁻¹) over the 2021 sampling season at Pipestone Creek near Pipestone (05NG003).

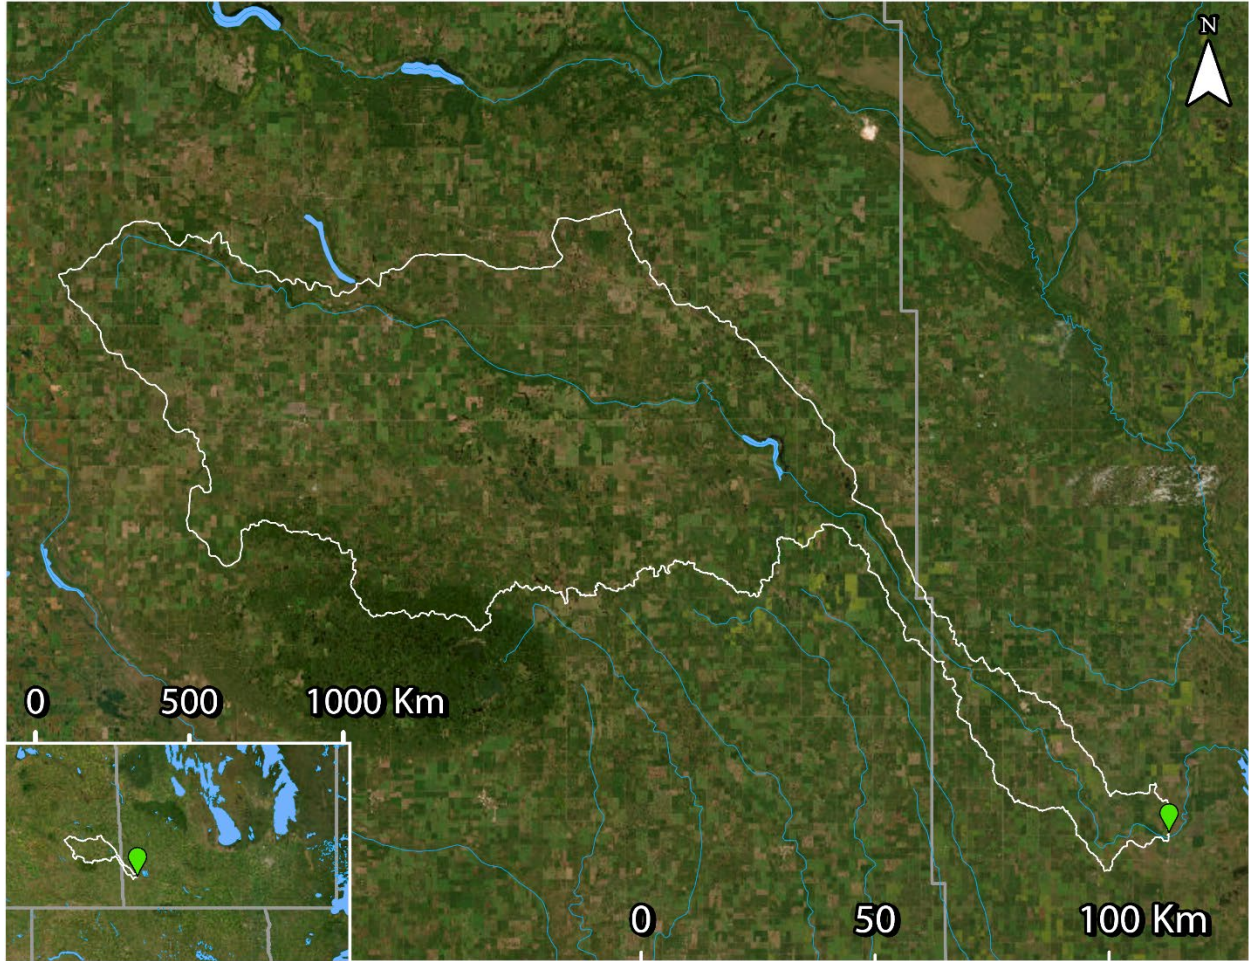


Figure 11: WSC station 05NG003 (green) and drainage area polygon (white - source: AAFC). LWCBMN samples directly at the WSC station.

Plum Creek near Souris

This sample site is located upstream of the City of Souris along Plum Creek, which flows into the Souris River. The drainage area of this site includes Oak Lake. This stretch of Plum Creek drains an area comprising mainly of agricultural and forested areas. This sampling site is located at Water Survey of Canada station 05NG007, near Souris. The sampling effort provided adequate coverage to calculate TP loads and exports.

Table 7: Indices of discharge and phosphorus from the incremental drainage area of Plum Creek near Souris (05NG007). See Supplemental Table 2 for gross calculations.

Incremental drainage area:	1211.45 km ²
Peak discharge:	0.17 m ³ s ⁻¹ (2021-06-14)
Peak TP concentration:	0.26 mg/L (2021-10-19)
% of water load in spring:	69.45%
% of TP load in spring:	85.36%
¹Incremental water load:	-0.0096 km ³ y ⁻¹
¹Incremental TP load:	-1.94 tonnes P y ⁻¹
²Incremental water export:	-7.96 mm y ⁻¹
²Incremental TP export:	-0.016 kg P ha ⁻¹ y ⁻¹

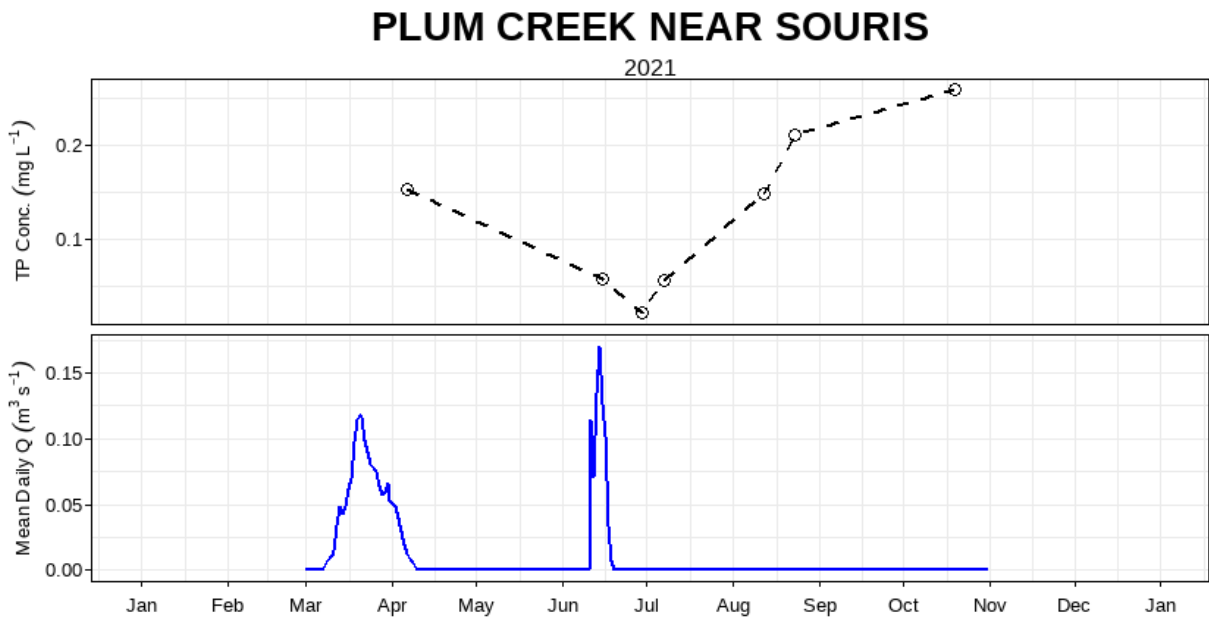


Figure 12: Mean daily discharge (m³ s⁻¹) and total phosphorus concentration (mg L⁻¹) over the 2021 sampling season at Plum Creek near Souris (05NG007).

¹ Incremental values are calculated by subtracting gross "Pipestone Creek near Pipestone" values from gross "Plum Creek near Souris" values.

² Incremental exports are calculated by dividing incremental loads by incremental drainage areas.

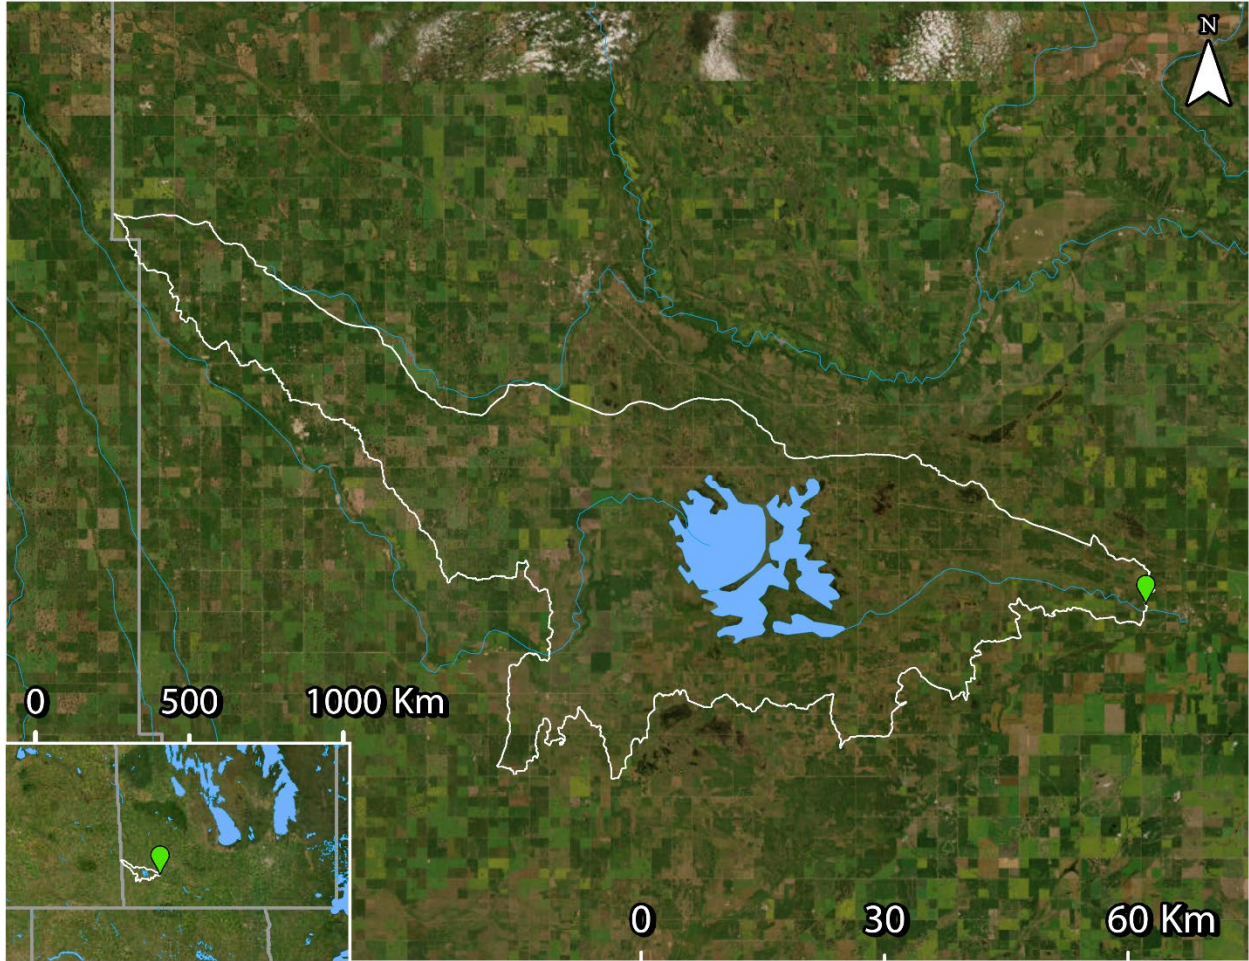


Figure 13: WSC station 05NG007 (green), and incremental drainage area polygon (white - source: WSC). See Supplemental Figure 2 for upstream drainage areas used to calculate incremental area. LWCBMN samples directly at the WSC station.

Sites without capacity for load/export calculation

Souris River at Souris

The Souris River originating in Saskatchewan, flows south into North Dakota and back north into Manitoba. It is approximately 700 km in length, and merges with the Assiniboine River at Treesbank. This sample site is located at the Water Survey of Canada flow meter 05NG021, near Souris. Because Plum Creek joins Souris River between the WSC station and the sampling location, this prevents accurate calculation of load/export.

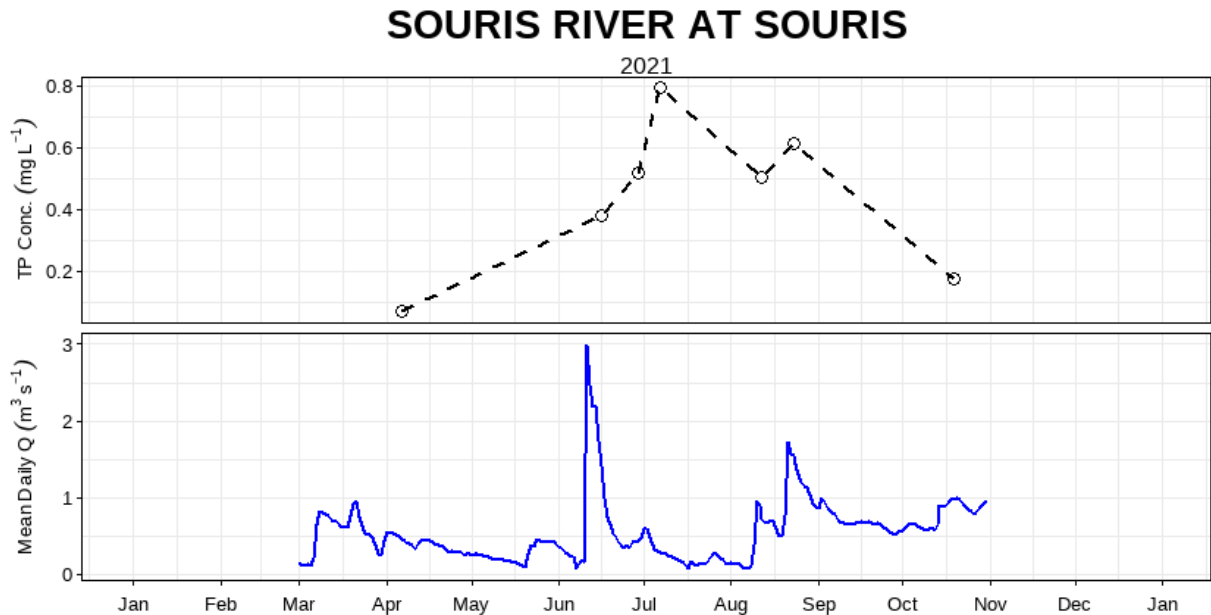


Figure 14: Mean daily discharge (m³ s⁻¹) and total phosphorus concentration (mg L⁻¹) over the 2021 sampling season at Souris River at Souris (05NG021).

Souris River near Minot

The Souris River originating in Saskatchewan, flows south into North Dakota and back north into Manitoba. It is approximately 700 km in length, and merges with the Assiniboine River at Treesbank. This sampling site is located at USGS site 05117600, in the centre of Minot, ND. We cannot calculate phosphorus loads and exports because flow is not measured.

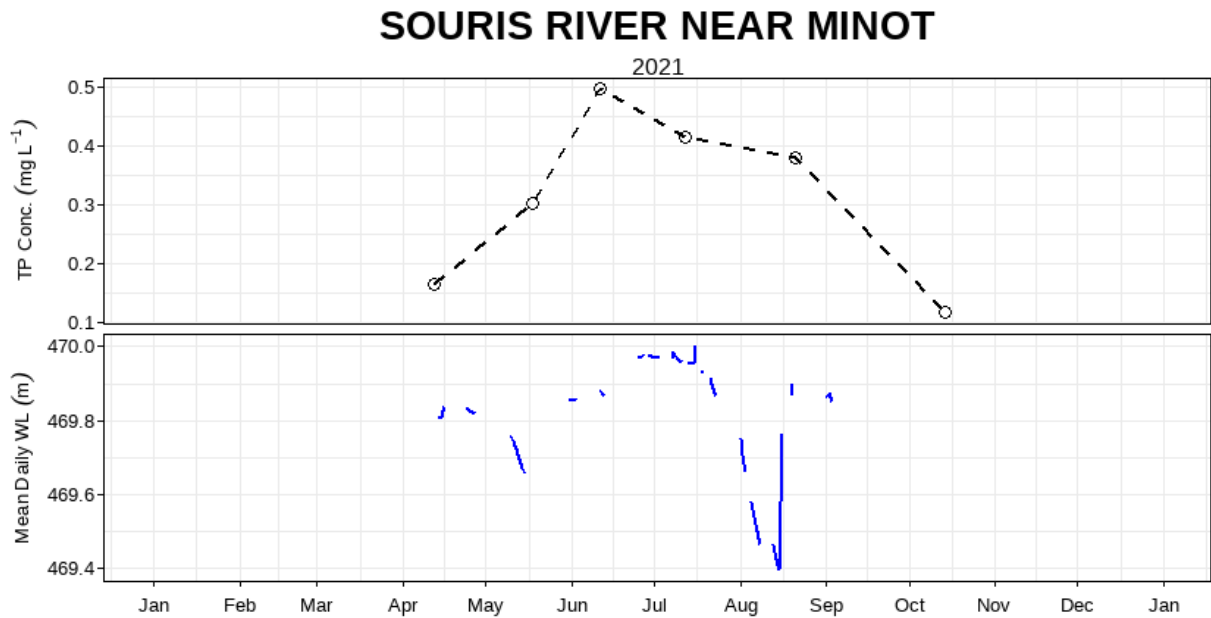


Figure 15: Mean daily water level (m) and total phosphorus concentration (mg L⁻¹) over the 2021 sampling season at Souris River near Minot (USGS station 05117600).

Whitewater Lake near Boissevain

Whitewater Lake is situated north of Turtle Mountain Provincial Park. The gross drainage area is 684 km² and consists mainly of agricultural land. This sample site is located at the Water Survey of Canada flow meter 05NG021, near Boissevain. This site has become a terminal basin (does not contribute water or phosphorus downstream) because of evaporation.

WHITEWATER LAKE NEAR BOISSEVAIN



Figure 16: Mean daily water level (m) and total phosphorus concentration (mg L⁻¹) over the 2021 sampling season at Whitewater Lake near Boissevain (05NG023).

Turtlehead Creek at Deloraine Reservoir

Turtlehead Creek is located upstream of Deloraine Reservoir. It has a drainage area of 74.9 km² (East Souris River Watershed Hydrology, 2005). We cannot calculate phosphorus loads and exports because flow is not measured at this site.

TURTLEHEAD CREEK AT DELORAINE RESERVOIR

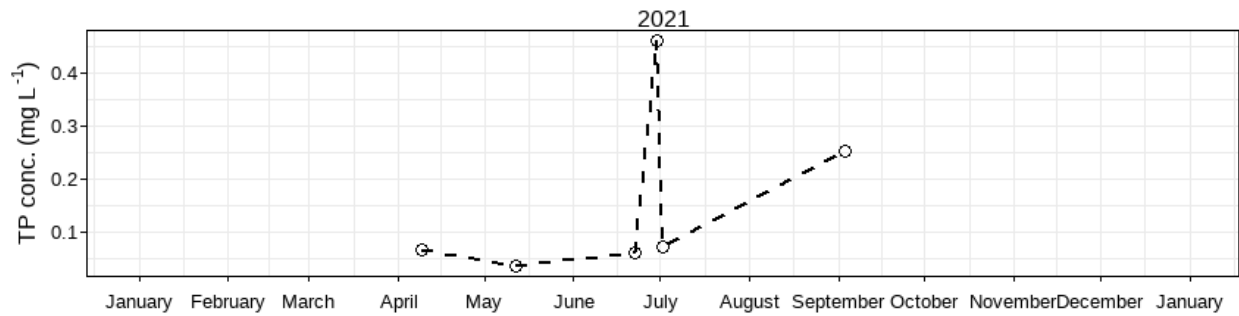


Figure 17: Total phosphorus concentration (mg L⁻¹) over the 2021 sampling season at Turtlehead Creek at Deloraine Reservoir.

Gainsborough Creek near Lyleton

Gainsborough Creek is a creek near Lyleton which flows east into the Souris River. This sampling site is located at Water Survey of Canada station 05NF007, north of Elm Creek, MB. In 2021, only water level data is available.

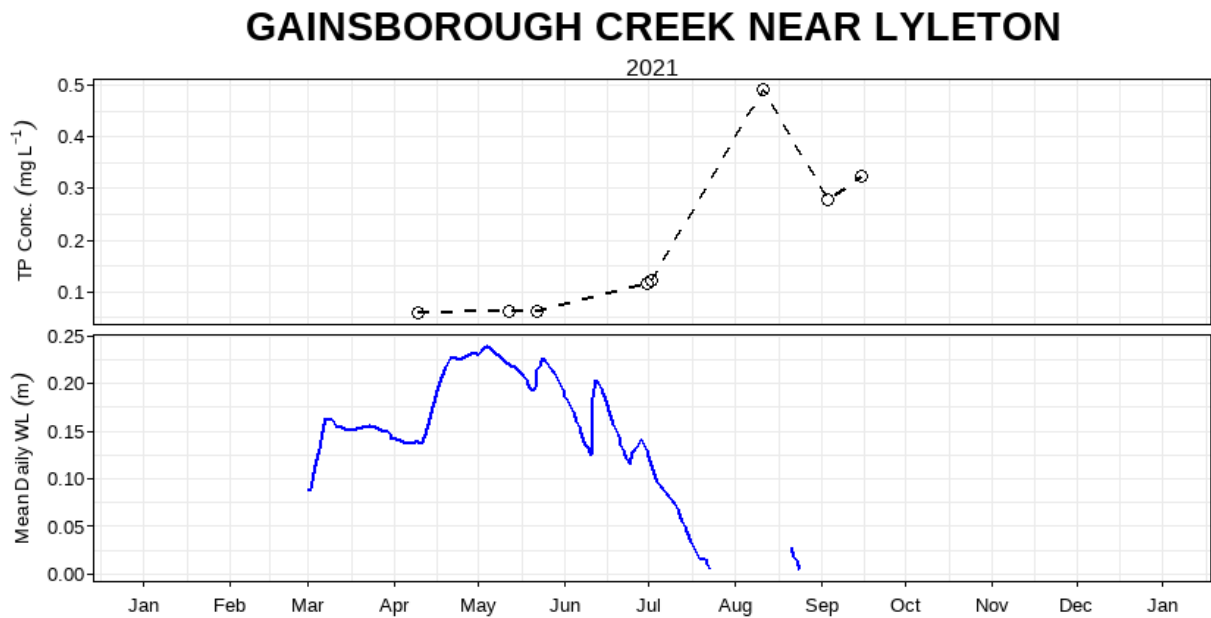


Figure 18: Mean daily water level (m) and total phosphorus concentration (mg L⁻¹) over the 2021 sampling season at Gainsborough Creek near Lyleton (05NF007).

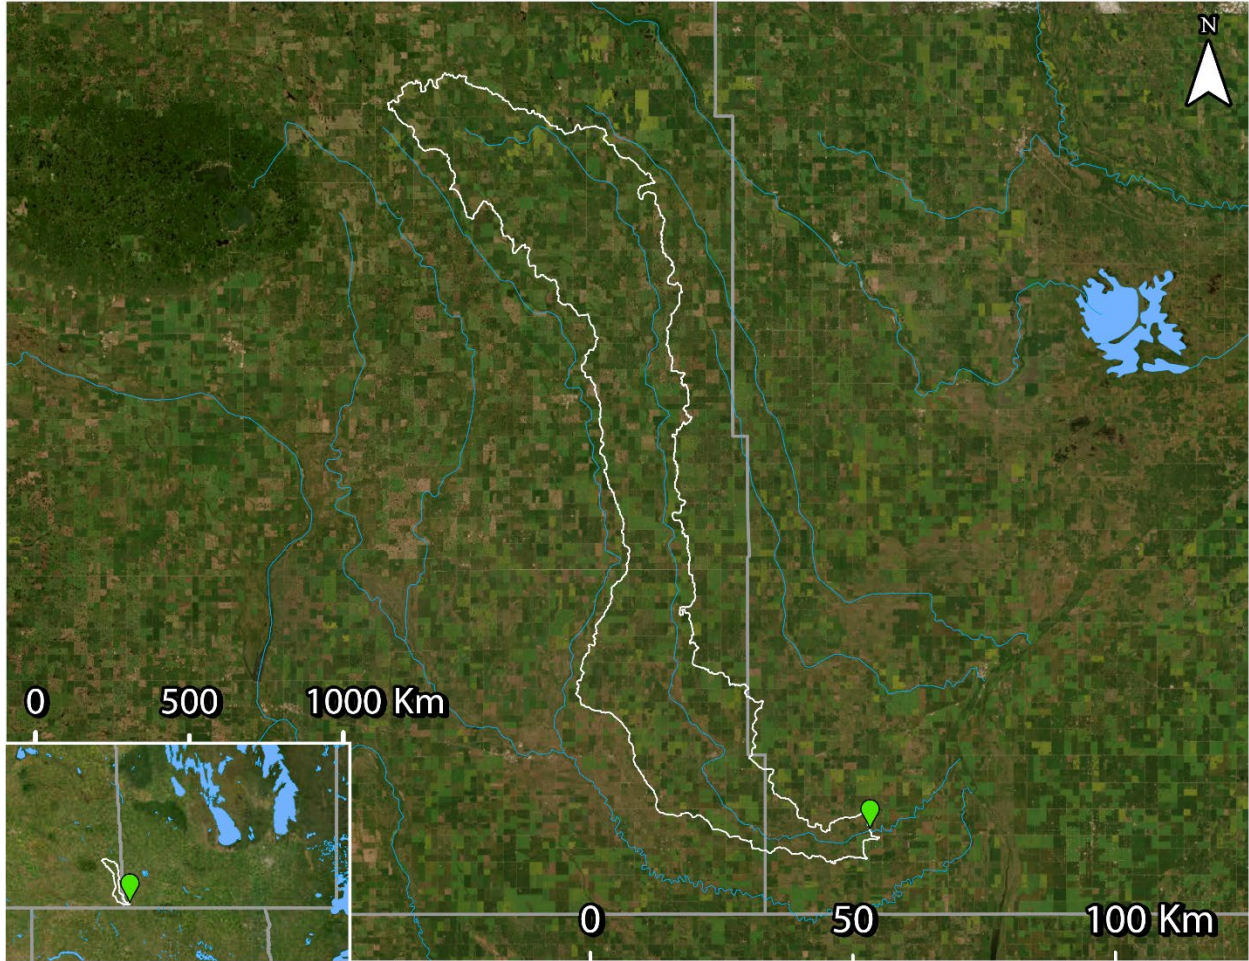



Figure 19: WSC station 05NF007 (green) and drainage area polygon (white - source: WSC). LWCBMN samples directly at the WSC station.

Incremental Calculations

Souris River at Melita

Supplemental Table 1: Indices of discharge and phosphorus from the combined gross drainage area and stream discharge of Souris River at Melita (05NF001).

Gross drainage area:	46292.44 km ²
Water load:	0.0081 km ³ y ⁻¹
TP load:	1.66 tonnes P y ⁻¹
Water export:	0.16 mm y ⁻¹
TP export:	0.00034 kg P ha ⁻¹ y ⁻¹

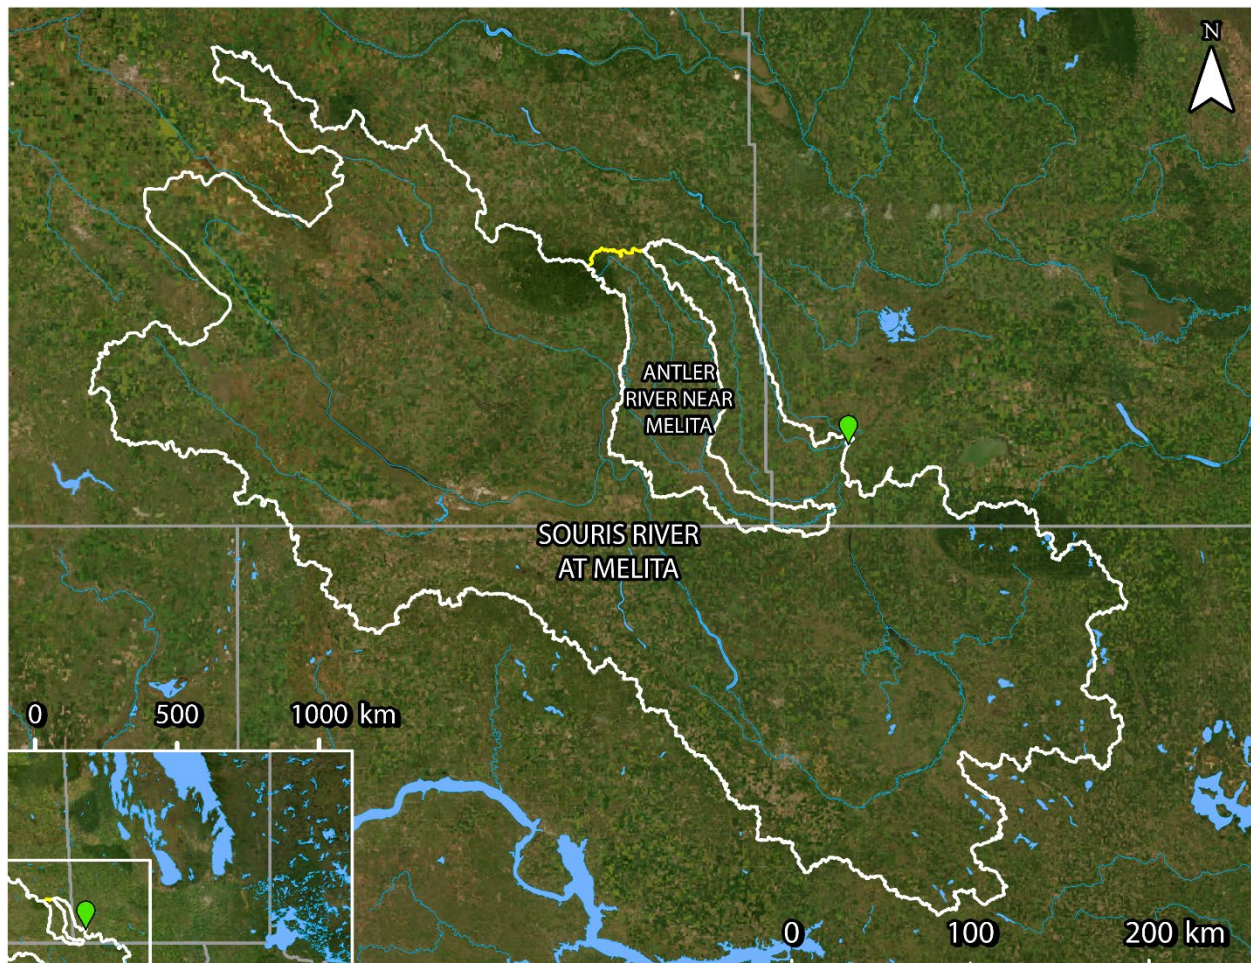

Supplemental Figure 1: Incremental drainage area in white and upstream drainage areas in yellow. Incremental values are calculated by subtracting gross “Antler River near Melita” from “Souris River at Melita” values.

Plum Creek near Souris

Supplemental Table 2: Indices of discharge and phosphorus from the gross drainage area of Pembina River downstream of Plum Creek near Souris (05NG007) in 2021.

Gross drainage area:	5477.63 km ²
Water load:	0.00022 km ³ y ⁻¹
TP load:	0.027 tonnes P y ⁻¹
Water export:	0.039 mm y ⁻¹
TP export:	0.000049 kg P ha ⁻¹ y ⁻¹



Supplemental Figure 2: Incremental drainage area in white and upstream drainage area in yellow. Incremental values are calculated by subtracting gross “Pipestone Creek near Pipestone” values from gross “Plum Creek near Souris” values.

Map Sources

Drainage area polygons

Primarily, and whenever possible, drainage area polygons were taken from the Water Survey of Canada's (WSC) National Hydrometric Network Basin Polygons. Released on July 15, 2022, this prerelease version of the dataset contains drainage area polygons for over 7300 of the 7896 active and discontinued WSC stations. According to WSC, this dataset will continue to be updated as new polygons are added. For our analysis, we used drainage areas from this dataset.

Link: <https://catalogue.ec.gc.ca/geonetwork/srv/eng/catalog.search#/metadata/0c121878-ac23-46f5-95df-eb9960753375>

Secondarily, when no WSC drainage area polygons were available, or when it was necessary to enable accurate incremental calculations, we used drainage area polygons from the Total Gross Drainage Areas of the Agriculture and Agri-Food Canada (AAFC)'s Watersheds Project – 2013

Link: <https://open.canada.ca/data/en/dataset/67c8352d-d362-43dc-9255-21e2b0cf466c>

Due to the required use of drainage area polygons from two different datasets, some polygons may slightly overlap. Hotspot maps, as a result, have a few instances where a drainage area is visually cut off. However, most of these instances are very minor, and we display all watersheds in their full extent on each sampling site's individual section.

Map layers

Satellite imagery used in all maps is from the World Imagery map layer (Source: Esri, Maxar, Earthstar Geographics, and the GIS User Community). World Imagery provides one meter or better satellite and aerial imagery in many parts of the world and lower resolution satellite imagery worldwide.

Lake and river map data used in all maps is from North America Environmental Atlas (Lakes, Rivers). The North American Environmental Atlas – Lakes & Rivers datasets display area hydrographic features (Lakes: major lakes and reservoirs; Rivers: major rivers, streams, and canals) of North America at a reference spatial scale of 1:1,000,000. Credits: Commission for Environmental Cooperation (CEC). 2023. "North American Atlas – Lakes and Rivers". Natural Resources Canada (NRCan), Instituto Nacional de Estadística y Geografía (INEGI), Comisión Nacional del Agua (CONAGUA), U.S. Geological Survey (USGS). Ed. 3.0, Vector digital data [1:1,000,000].

The **Lake Winnipeg Community-Based Monitoring Network** (LWCBMN) is a collaborative, long-term phosphorus monitoring program designed to identify localized phosphorus hotspots where action is required to improve Lake Winnipeg water quality. LWCBMN mobilizes citizen volunteers and watershed partners to collect water samples across Manitoba, generating robust water-quality data that is useful to community practitioners, academic researchers, government scientists and policy-makers alike. Focusing research, resources and action in phosphorus hotspots is necessary to reduce phosphorus loading to Lake Winnipeg.

LWCBMN is delivered in partnership with Manitoba's watershed districts, LWF's science advisors, volunteer citizen scientists and Dr. Nora Casson's laboratory at the University of Winnipeg. Thank you to all who make this network possible!

The **Lake Winnipeg Foundation** (LWF) advocates for change and coordinates action to improve the health of Lake Winnipeg. Combining the commitment of our grassroots membership and the expertise of our science advisors, LWF is nationally recognized for our unique capacity to link science and action. Our goal is to ensure policy and practices informed by evidence are implemented and enforced.

LWF proudly acknowledges the following funders

This project was undertaken with the financial support of the Government of Canada.
Ce projet a été réalisé avec l'appui financier du gouvernement du Canada.



Foundation



Lake Winnipeg Foundation    

107 - 62 Hargrave St, Winnipeg, MB, R3C 1N1
Treaty 1 Territory & Homeland of the Métis Nation
info@lakewinnipegfoundation.org | 204-956-0436